

PLOUGHMAN
PATENT COOPERATION TREATY
& PARTNERS

- 7 NOV. 1997 From the INTERNATIONAL BUREAU

PCT

GHJ/AHO

**NOTIFICATION CONCERNING
SUBMISSION OF PRIORITY DOCUMENTS**

(PCT Administrative Instructions, Section 411)

To:

PLOUGHMAN, VINGTOFT & PARTNERS A/S
Sankt Annae Plads 11
P.O. Box 3007
DK-1021 Copenhagen K
DANEMARK

Date of mailing (day/month/year)

30 October 1997 (30.10.97)

Applicant's or agent's file reference

18791 PC1

IMPORTANT NOTIFICATION

International application No.

PCT/DK97/00368

International filing date (day/month/year)

04 September 1997 (04.09.97)

Priority date (day/month/year)

04 September 1996 (04.09.96)

Applicant

TECHNICAL UNIVERSITY OF DENMARK et al

The applicant is hereby notified of the date of receipt by the International Bureau of the priority document(s) relating to the following application(s):

Priority application No.:

Priority date:

Priority country:

Date of receipt of priority document:

0953/96

04 Sep 1996 (04.09.96)

DK

30 Oct 1997 (30.10.97)

0150/97

10 Feb 1997 (10.02.97)

DK

30 Oct 1997 (30.10.97)

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

A. Karkachi

Telephone No.: (41-22) 338.83.38

13 JAN. 1998

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference 18791 PC1	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/DK 97/ 00368	International filing date (day/month/year) 04/09/1997	(Earliest) Priority Date (day/month/year) 04/09/1996
Applicant TECHNICAL UNIVERSITY OF DENMARK et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 4 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. ☐ Certain claims were found unsearchable (see Box I).

2. ☐ Unity of invention is lacking (see Box II).

3. ☐ The international application contains disclosure of a nucleotide and/or amino acid sequence listing and the international search was carried out on the basis of the sequence listing

☐ filed with the international application.

☐ furnished by the applicant separately from the international application,

☐ but not accompanied by a statement to the effect that it did not include matter going beyond the disclosure in the international application as filed.

☐ Transcribed by this Authority

4. With regard to the title, ☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this International Search Report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is:

Figure No. 1 ☒ as suggested by the applicant.

☐ None of the figures.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

NOTES TO FORM PCT/ISA/220

These Notes are intended to give the basic instructions concerning the filing of amendments under article 19. The Notes are based on the requirements of the Patent Cooperation Treaty, the Regulations and the Administrative Instructions under that Treaty. In case of discrepancy between these Notes and those requirements, the latter are applicable. For more detailed information, see also the PCT Applicant's Guide, a publication of WIPO.

In these Notes, "Article", "Rule", and "Section" refer to the provisions of the PCT, the PCT Regulations and the PCT Administrative Instructions respectively.

INSTRUCTIONS CONCERNING AMENDMENTS UNDER ARTICLE 19

The applicant has, after having received the international search report, one opportunity to amend the claims of the international application. It should however be emphasized that, since all parts of the international application (claims, description and drawings) may be amended during the international preliminary examination procedure, there is usually no need to file amendments of the claims under Article 19 except where, e.g. the applicant wants the latter to be published for the purposes of provisional protection or has another reason for amending the claims before international publication. Furthermore, it should be emphasized that provisional protection is available in some States only.

What parts of the international application may be amended?

Under Article 19, only the claims may be amended.

During the international phase, the claims may also be amended (or further amended) under Article 34 before the International Preliminary Examining Authority. The description and drawings may only be amended under Article 34 before the International Examining Authority.

Upon entry into the national phase, all parts of the international application may be amended under Article 28 or, where applicable, Article 41.

When?

Within 2 months from the date of transmittal of the international search report or 16 months from the priority date, whichever time limit expires later. It should be noted, however, that the amendments will be considered as having been received on time if they are received by the International Bureau after the expiration of the applicable time limit but before the completion of the technical preparations for international publication (Rule 46.1).

Where not to file the amendments?

The amendments may only be filed with the International Bureau and not with the receiving Office or the International Searching Authority (Rule 46.2).

Where a demand for international preliminary examination has been/is filed, see below.

How?

Either by cancelling one or more entire claims, by adding one or more new claims or by amending the text of one or more of the claims as filed.

A replacement sheet must be submitted for each sheet of the claims which, on account of an amendment or amendments, differs from the sheet originally filed.

All the claims appearing on a replacement sheet must be numbered in Arabic numerals. Where a claim is cancelled, no renumbering of the other claims is required. In all cases where claims are renumbered, they must be renumbered consecutively (Administrative Instructions, Section 205(b)).

The amendments must be made in the language in which the international application is to be published.

What documents must/may accompany the amendments?

Letter (Section 205(b)):

The amendments must be submitted with a letter.

The letter will not be published with the international application and the amended claims. It should not be confused with the "Statement under Article 19(1)" (see below, under "Statement under Article 19(1)").

The letter must be in English or French, at the choice of the applicant. However, if the language of the international application is English, the letter must be in English; if the language of the international application is French, the letter must be in French.

NOTES TO FORM PCT/ISA/220 (continued)

The letter must indicate the differences between the claims as filed and the claims as amended. It must, in particular, indicate, in connection with each claim appearing in the international application (it being understood that identical indications concerning several claims may be grouped), whether

- (i) the claim is unchanged;
- (ii) the claim is cancelled;
- (iii) the claim is new;
- (iv) the claim replaces one or more claims as filed;
- (v) the claim is the result of the division of a claim as filed.

The following examples illustrate the manner in which amendments must be explained in the accompanying letter:

1. [Where originally there were 48 claims and after amendment of some claims there are 51]:
"Claims 1 to 29, 31, 32, 34, 35, 37 to 48 replaced by amended claims bearing the same numbers; claims 30, 33 and 36 unchanged; new claims 49 to 51 added."
2. [Where originally there were 15 claims and after amendment of all claims there are 11]:
"Claims 1 to 15 replaced by amended claims 1 to 11."
3. [Where originally there were 14 claims and the amendments consist in cancelling some claims and in adding new claims]:
"Claims 1 to 6 and 14 unchanged; claims 7 to 13 cancelled; new claims 15, 16 and 17 added." or
"Claims 7 to 13 cancelled; new claims 15, 16 and 17 added; all other claims unchanged."
4. [Where various kinds of amendments are made]:
"Claims 1-10 unchanged; claims 11 to 13, 18 and 19 cancelled; claims 14, 15 and 16 replaced by amended claim 14; claim 17 subdivided into amended claims 15, 16 and 17; new claims 20 and 21 added."

"Statement under article 19(1)" (Rule 46.4)

The amendments may be accompanied by a statement explaining the amendments and indicating any impact that such amendments might have on the description and the drawings (which cannot be amended under Article 19(1)).

The statement will be published with the international application and the amended claims.

It must be in the language in which the international application is to be published.

It must be brief, not exceeding 500 words if in English or if translated into English.

It should not be confused with and does not replace the letter indicating the differences between the claims as filed and as amended. It must be filed on a separate sheet and must be identified as such by a heading, preferably by using the words "Statement under Article 19(1)."

It may not contain any disparaging comments on the international search report or the relevance of citations contained in that report. Reference to citations, relevant to a given claim, contained in the international search report may be made only in connection with an amendment of that claim.

Consequence if a demand for international preliminary examination has already been filed

If, at the time of filing any amendments under Article 19, a demand for international preliminary examination has already been submitted, the applicant must preferably, at the same time of filing the amendments with the International Bureau, also file a copy of such amendments with the International Preliminary Examining Authority (see Rule 62.2(a), first sentence).

Consequence with regard to translation of the international application for entry into the national phase

The applicant's attention is drawn to the fact that, where upon entry into the national phase, a translation of the claims as amended under Article 19 may have to be furnished to the designated/elected Offices, instead of, or in addition to, the translation of the claims as filed.

For further details on the requirements of each designated/elected Office, see Volume II of the PCT Applicant's Guide.

INTERNATIONAL SEARCH REPORT

International Application No

T/DK 97/00368

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G01N15/14 G01N33/543 B03C1/035

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01N B03C B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	AHN C H ET AL: "A FULLY INTEGRATED MICROMACHINED MAGNETIC PARTICLE MANIPULATOR AND SEPARATOR" PROCEEDING OF THE WORKSHOP ON MICRO ELECTRO MECHANICAL SYSTEMS (MEM, OISO, JAN. 25 - 28, 1994, no. WORKSHOP 7, 25 January 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 91-96, XP000528399 see the whole document --- -/--	1-4,9, 10,12, 17, 20-27, 29,30, 34,35



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

12 December 1997

Date of mailing of the international search report

- 7. 01. 98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brison, O

INTERNATIONAL SEARCH REPORT

International Application No

PCT/DK 97/00368

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 827 555 A (KAMENSKY L ET AL) 6 August 1974 see the whole document	1-4,9, 10,12, 17, 20-27, 29,30,34
X	---	37
Y	US 4 279 345 A (ALLRED JOHN C) 21 July 1981 see the whole document	12
Y	---	
Y	WO 96 09409 A (MILTENYI BIOTECH INC) 28 March 1996 see page 5, line 10 - page 8, line 20	35
Y	---	
Y	US 4 910 148 A (SORENSEN OTTO ET AL) 20 March 1990 see the whole document	36
Y	---	
Y	US 3 560 754 A (KAMENSKY LOUIS A) 2 February 1971 see the whole document	36
X	---	
X	WO 94 15193 A (SIENNA BIOTECH INC) 7 July 1994 see abstract	38
X	---	
X	WO 93 22058 A (UNIV PENNSYLVANIA) 11 November 1993 see page 11, line 1-14	39
A	---	
A	US 5 053 344 A (ZBOROWSKI MACIEJ ET AL) 1 October 1991 see abstract	1
A	---	
A	US 5 483 469 A (VAN DEN ENGH GER ET AL) 9 January 1996 see the whole document	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3827555 A	06-08-74	US 3984307 A	05-10-76
US 4279345 A	21-07-81	NONE	
WO 9609409 A	28-03-96	AU 3593595 A	09-04-96
		CA 2200294 A	28-03-96
		EP 0778899 A	18-06-97
US 4910148 A	20-03-90	NONE	
US 3560754 A	02-02-71	BE 689813 A	02-05-67
		CH 446769 A	
		DE 1598634 A	15-04-71
		FR 1501326 A	29-01-68
		GB 1101063 A	
		NL 6615120 A	18-05-67
		SE 333264 B	08-03-71
WO 9415193 A	07-07-94	AU 670489 B	18-07-96
		AU 5873494 A	19-07-94
		CA 2151060 A	07-07-94
		CN 1092866 A	28-09-94
		EP 0676045 A	11-10-95
		JP 8505231 T	04-06-96
		US 5589401 A	31-12-96
WO 9322058 A	11-11-93	US 5304487 A	19-04-94
		US 5296375 A	22-03-94
		AT 155711 T	15-08-97
		AT 140025 T	15-07-96
		AT 140880 T	15-08-96
		AU 677780 B	08-05-97
		AU 4222393 A	29-11-93
		AU 680195 B	24-07-97
		AU 4222593 A	29-11-93
		AU 677781 B	08-05-97
		AU 4222693 A	29-11-93
		AU 4222793 A	29-11-93
		AU 677197 B	17-04-97
		AU 4223593 A	29-11-93

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9322058 A		CA 2134474 A	11-11-93
		CA 2134475 A	11-11-93
		CA 2134476 A	11-11-93
		CA 2134478 A	11-11-93
		DE 69303483 D	08-08-96
		DE 69303483 T	06-02-97
		DE 69303898 D	05-09-96
		DE 69303898 T	20-02-97
		DE 69312483 D	04-09-97
		EP 0637996 A	15-02-95
		EP 0637997 A	15-02-95
		EP 0639223 A	22-02-95
		EP 0637998 A	15-02-95
		EP 0637999 A	15-02-95
		HK 16897 A	13-02-97
		JP 7506430 T	13-07-95
		JP 7506431 T	13-07-95
		JP 7506256 T	13-07-95
		JP 7506257 T	13-07-95
		JP 7506258 T	13-07-95
		WO 9322053 A	11-11-93
		WO 9322054 A	11-11-93
		WO 9322421 A	11-11-93
		WO 9322055 A	11-11-93
		US 5635358 A	03-06-97
		US 5427946 A	27-06-95
		US 5498392 A	12-03-96
		US 5587128 A	24-12-96
		US 5486335 A	23-01-96
		US 5637469 A	10-06-97

US 5053344 A	01-10-91	NONE	

US 5483469 A	09-01-96	NONE	

Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

A micro flow system is provided for separating particles, comprising a microfabricated member having a flow channel (5) defined therein for guiding a flow of a fluid containing the particles through the flow channel, first inlet means (2) positioned at one end of the flow channel for entering the fluid into the flow channel, first outlet means (7) positioned at the other end of the flow channel for discharging the fluid from the flow channel, the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross-section of the flow channel, the member being positioned in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field across the flow channel are deflected in the direction of the field.

Further, a micro flow system is provided for analysing components of a fluid comprising a microfabricated member having a flow channel defined therein for guiding a flow of a fluid through the flow channel, first inlet means for entering particles into the flow channel, first outlet means for discharging of fluid from the flow channel and a plurality of assay sites located in the flow channel and comprising immobilised reagents whereby the fluid may be analyzed for a plurality of components while residing in the flow channel.

5 MRS. 1998

The demand must be filed directly with the competent International Preliminary Examining Authority or, if two or more Authorities are competent, with the one chosen by the applicant. The full name or two-letter code of that Authority may be indicated by the applicant on the line below:
IPEA/ EP ✓

PCT

CHAPTER II

DEMAND

under Article 31 of the Patent Cooperation Treaty:
The undersigned requests that the international application specified below be the subject of international preliminary examination according to the Patent Cooperation Treaty.

For International Preliminary Examining Authority use only	
Identification of IPEA	Date of receipt of DEMAND
Box No. I IDENTIFICATION OF THE INTERNATIONAL APPLICATION	
Applicant's or agent's file reference 18791 PC 1 ✓	
International application No. PCT/DK97/00368 ✓	International filing date (day/month/year) 4 September 1997 ✓
(Earliest) Priority date (day/month/year) 4 September 1996 ✓	
Title of invention A Microflow System for Particle Separation and Analysis	
Box No. II APPLICANT(S)	
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)	
Technical University of Denmark DTU - Building 101 A DK-2800 Lyngby ✓	
Telephone No.: +45 45 25 25 25 ✓	
Facsimile No.: +45 45 88 17 99 ✓	
Teleprinter No.:	
State (i.e. country) of nationality: DK	State (i.e. country) of residence: DK
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)	
BLANKENSTEIN, Gert Wiesinger Weg 5 D-20253 Hamburg ✓	
State (i.e. country) of nationality: DE	State (i.e. country) of residence: DE
Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)	
State (i.e. country) of nationality:	State (i.e. country) of residence:
<input type="checkbox"/> Further applicants are indicated on a continuation sheet.	

Box No. III AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCEThe following person is ☒ agent ☐ common representativeand ☒ has been appointed earlier and represents the applicant(s) also for international preliminary examination.☐ is hereby appointed and any earlier appointment of (an) agent(s)/common representative is hereby revoked.☐ is hereby appointed, specifically for the procedure before the International Preliminary Examining Authority, in addition to the agent(s)/common representative appointed earlier.Name and address: *(Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)*Plougmann, Vingtoft & Partners
Sankt Annæ Plads 11
P.O. Box 3007
DK-1021 Copenhagen K ✓

Telephone No.:

+45 33 63 93 00 ✓

Facsimile No.:

+45 33 63 96 00 ✓

Teleprinter No.:

☐ Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.**Box No. IV STATEMENT CONCERNING AMENDMENTS**

The applicant wishes the International Preliminary Examining Authority*

(i) ☒ to start the international preliminary examination on the basis of the international application as originally filed.(ii) ☐ to take into account the amendments under Article 34 of☐ the description (amendments attached).☐ the claims (amendments attached).☐ the drawings (amendments attached).(iii) ☐ to take into account any amendments of the claims under Article 19 filed with the International Bureau (a copy is attached).(iv) ☐ to disregard any amendments of the claims made under Article 19 and to consider them as reversed.(v) ☐ to postpone the start of the international preliminary examination until the expiration of 20 months from the priority date unless that Authority receives a copy of any amendments made under Article 19 or a notice from the applicant that he does not wish to make such amendments (Rule 69.1(d)). *(This check-box may be marked only where the time limit under Article 19 has not yet expired.)*

* Where no check-box is marked, international preliminary examination will start on the basis of the international application as originally filed or, where a copy of amendments to the claims under Article 19 and/or amendments of the international application under Article 34 are received by the International Preliminary Examining Authority before it has begun to draw up a written opinion or the international preliminary examination report, as so amended.

Box No. V ELECTION OF STATES☒ The applicant hereby elects all eligible States (that is, all States which have been designated and which are bound by Chapter II of the PCT) except*(If the applicant does not wish to elect certain eligible States, the name(s) or country code(s) of those States must be indicated above.)*

Box No. VI CHECKLIST

The demand is accompanied by the following documents for the purposes of international preliminary examination:

- | | | |
|--|---|--------|
| 1. amendments under Article 34 | | |
| description | : | sheets |
| claims | : | sheets |
| drawings | : | sheets |
| 2. letter accompanying amendments under Article 34 | : | sheets |
| 3. copy of amendments under Article 19 | : | sheets |
| 4. copy of statement under Article 19 | : | sheets |
| 5. other (specify): | : | sheets |

For International Preliminary
Examining Authority use only

received

not received

☐☐☐☐☐☐☐☐☐☐☐☐☐☐

The demand is also accompanied by the item(s) marked below:

- | | |
|--|--|
| 1. <input type="checkbox"/> separate signed power of attorney | 4. <input checked="" type="checkbox"/> fee calculation sheet ✓ |
| 2. <input type="checkbox"/> copy of general power of attorney | 5. <input type="checkbox"/> other (specify): |
| 3. <input type="checkbox"/> statement explaining lack of signature | |

Box No. VII SIGNATURE OF APPLICANT, AGENT OR COMMON REPRESENTATIVE

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the demand).

Copenhagen, 5 March 1998
Plougmann, Vingtoft & Partners


Peter Koefoed

For International Preliminary Examining Authority use only

1. Date of actual receipt of DEMAND:

2. Adjusted date of receipt of demand due to CORRECTIONS under Rule 60.1(b):

3. ☐ The date of receipt of the demand is AFTER the expiration of 19 months from the priority date and item 4 or 5, below, does not apply. ☐ The applicant has been informed accordingly.

4. ☐ The date of receipt of the demand is WITHIN the period of 19 months from the priority date as extended by virtue of Rule 80.5.

5. ☐ Although the date of receipt of the demand is after the expiration of 19 months from the priority date, the delay in arrival is EXCUSED pursuant to Rule 82.

For International Bureau use only

Demand received from IPEA on:

PATENT COOPERATION TREATY

From the RECEIVING OFFICE

PCT

To:

PLOUGMANN, VINGTOFT & PARTNERS A/S
P.O.Box 3007
Sankt Annæ Plads 11
DK-1021 Copenhagen K
Denmark

NOTIFICATION OF THE INTERNATIONAL APPLICATION NUMBER AND OF THE INTERNATIONAL FILING DATE

(PCT Rule 20.5(c))

Date of mailing
(day/month/year)

18 September 1997

Applicant's or agent's file reference

18791 PC1

IMPORTANT NOTIFICATION

International application No.

PCT/DK 97/00368

International filing date (day/month/year)

04 September 1997

Priority date (day/month/year)

04 September 1996

Applicant

TECHNICAL UNIVERSITY OF DENMARK, et.al.

Title of the invention

A Microflow System for Particle Separation and Analysis

1. The applicant is hereby notified that the international application has been accorded the international application number and the international filing date indicated above.

2. The applicant is further notified that the record copy of the international application:

☒ was transmitted to the International Bureau on the date of mailing of this no-
tification.


☐ has not yet been transmitted to the International Bureau for the reason indicated below and a copy of this notification has been sent to the International Bureau*:

☐ because the necessary national security clearance has not yet been obtained.

☐ because (reason to be specified):


* The International Bureau monitors the transmittal of the record copy by the receiving Office and will notify the applicant (with Form PCT/IB/301) of its receipt. Should the record copy not have been received by the expiration of 14 months from the priority date, the International Bureau will notify the applicant (Rule 22.1(c)).

Name and mailing address of the receiving Office

 **Patentdirektoratet**
Helgeshøj Allé 81
DK-2630 Taastrup, Denmark

Facsimile No.

Authorized officer


Anne-Grethe Warrer-Madsen
Head Clerk

Telephone No.

13 JAN. 1998

PCT

From the INTERNATIONAL SEARCHING AUTHORITY

To:
PLOUGMANN, VINGTOFT & PARTNERS A/S
Sankt Annae Plads 11
P.O. Box 3007
1250 Copenhagen K
DENMARK

NOTIFICATION OF TRANSMITTAL OF
THE INTERNATIONAL SEARCH REPORT
OR THE DECLARATION

(PCT Rule 44.1)

Date of mailing
(day/month/year)

- 7. 01. 98

Applicant's or agent's file reference
18791 PC1

FOR FURTHER ACTION See paragraphs 1 and 4 below

International application No.
PCT/DK 97/00368

International filing date
(day/month/year) 04/09/1997

Applicant

TECHNICAL UNIVERSITY OF DENMARK et al.

1. ☒ The applicant is hereby notified that the International Search Report has been established and is transmitted herewith.

Filing of amendments and statement under Article 19:

The applicant is entitled, if he so wishes, to amend the claims of the International Application (see Rule 46):

When? The time limit for filing such amendments is normally 2 months from the date of transmittal of the International Search Report; however, for more details, see the notes on the accompanying sheet.

Where? Directly to the International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland
Facsimile No.: (41-22) 740.14.35

For more detailed instructions, see the notes on the accompanying sheet.

2. ☐ The applicant is hereby notified that no International Search Report will be established and that the declaration under Article 17(2)(a) to that effect is transmitted herewith.

3. ☐ With regard to the protest against payment of (an) additional fee(s) under Rule 40.2, the applicant is notified that:

☐ the protest together with the decision thereon has been transmitted to the International Bureau together with the applicant's request to forward the texts of both the protest and the decision thereon to the designated Offices.

☐ no decision has been made yet on the protest; the applicant will be notified as soon as a decision is made.

4. **Further action(s):** The applicant is reminded of the following:

Shortly after 18 months from the priority date, the international application will be published by the International Bureau. If the applicant wishes to avoid or postpone publication, a notice of withdrawal of the international application, or of the priority claim, must reach the International Bureau as provided in Rules 90 bis.1 and 90 bis.3, respectively, before the completion of the technical preparations for international publication.

Within 19 months from the priority date, a demand for international preliminary examination must be filed if the applicant wishes to postpone the entry into the national phase until 30 months from the priority date (in some Offices even later).

Within 20 months from the priority date, the applicant must perform the prescribed acts for entry into the national phase before all designated Offices which have not been elected in the demand or in a later election within 19 months from the priority date or could not be elected because they are not bound by Chapter II.

Name and mailing address of the International Searching Authority

 European Patent Office, P.B. 5818 Patentlaan 2
NL-2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Marie-Françoise Provot

PCT

REQUEST

The undersigned requests that the present international application be processed according to the Patent Cooperation Treaty.

For receiving Office use only

International Application No.

International Filing Date

Name of receiving Office and "PCT International Application"

Applicant's or agent's file reference
(if desired) (12 characters maximum)

18791 PC1

Box No. I TITLE OF INVENTION

A Microflow System for Particle Separation and Analysis

Box No. II APPLICANT

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)

TECHNICAL UNIVERSITY OF DENMARK
DTU - Building 101 A
DK-2800 Lyngby

☐ This person is also inventor.

Telephone No.

Facsimile No.

Teleprinter No.

State (i.e. country) of nationality:

DK

State (i.e. country) of residence:

DK

This person is applicant
for the purposes of:

☐

all designated
States

☒

all designated States except
the United States of America

☐

the United States
of America only

☐

the States indicated in
the Supplemental Box

Box No. III FURTHER APPLICANT(S) AND/OR (FURTHER) INVENTOR(S)

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country. The country of the address indicated in this Box is the applicant's State (i.e. country) of residence if no State of residence is indicated below.)

BLANKENSTEIN, Gert
Wiesinger Weg 5
D-20253 Hamburg

This person is:

☐ applicant only

☒ applicant and inventor

☐ inventor only (If this check-box
is marked, do not fill in below.)

State (i.e. country) of nationality:

DE

State (i.e. country) of residence:

DE

This person is applicant
for the purposes of:

☐

all designated
States

☐

all designated States except
the United States of America

☒

the United States
of America only

☐

the States indicated in
the Supplemental Box

☐ Further applicants and/or (further) inventors are indicated on a continuation sheet.

Box No. IV AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CORRESPONDENCE

The person identified below is hereby/has been appointed to act on behalf of the applicant(s) before the competent International Authorities as:

☒

agent

☐

common representative

Name and address: (Family name followed by given name; for a legal entity, full official designation. The address must include postal code and name of country.)

PLOUGMANN, VINGTOFT & PARTNERS A/S
P.O. Box 3007
Sankt Annæ Plads 11
DK-1021 Copenhagen K

Telephone No.

+45 33 63 93 00

Facsimile No.

+45 33 63 96 00

Teleprinter No.

☐ Mark this check-box where no agent or common representative is/has been appointed and the space above is used instead to indicate a special address to which correspondence should be sent.

Box No.V DESIGNATION OF STATES

The following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

Regional Patent

- ☒ AP/ARIPO Patent: GH Ghana, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SZ Swaziland, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT
- ☒ EA/Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ EP/European Patent: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ OA/OAPI Patent: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line)

National Patent (if other kind of protection or treatment desired, specify on dotted line):

- | | |
|--|--|
| <input checked="" type="checkbox"/> AL/Albania | <input checked="" type="checkbox"/> LV/Latvia |
| <input checked="" type="checkbox"/> AM/Armenia | <input checked="" type="checkbox"/> MD/Republic of Moldova |
| <input checked="" type="checkbox"/> AT/Austria and utility model | <input checked="" type="checkbox"/> MG/Madagascar |
| <input checked="" type="checkbox"/> AU/Australia | <input checked="" type="checkbox"/> MK/The former Yugoslav Republic of Macedonia |
| <input checked="" type="checkbox"/> AZ/Azerbaijan | <input checked="" type="checkbox"/> MN/Mongolia |
| <input checked="" type="checkbox"/> BA/Bosnia and Herzegovina | <input checked="" type="checkbox"/> MW/Malawi |
| <input checked="" type="checkbox"/> BB/Barbados | <input checked="" type="checkbox"/> MX/Mexico |
| <input checked="" type="checkbox"/> BG/Bulgaria | <input checked="" type="checkbox"/> NO/Norway |
| <input checked="" type="checkbox"/> BR/Brazil | <input checked="" type="checkbox"/> NZ/New Zealand |
| <input checked="" type="checkbox"/> BY/Belarus | <input checked="" type="checkbox"/> PL/Poland |
| <input checked="" type="checkbox"/> CA/Canada | <input checked="" type="checkbox"/> PT/Portugal |
| <input checked="" type="checkbox"/> CH and LI Switzerland and Liechtenstein | <input checked="" type="checkbox"/> RO/Romania |
| <input checked="" type="checkbox"/> CN/China | <input checked="" type="checkbox"/> RU/Russian Federation |
| <input checked="" type="checkbox"/> CU/Cuba | <input checked="" type="checkbox"/> SD/Sudan |
| <input checked="" type="checkbox"/> CZ/Czech Republic and utility model | <input checked="" type="checkbox"/> SE/Sweden |
| <input checked="" type="checkbox"/> DE/Germany and utility model | <input checked="" type="checkbox"/> SG/Singapore |
| <input checked="" type="checkbox"/> DK/Denmark and utility model | <input checked="" type="checkbox"/> SI/Slovenia |
| <input checked="" type="checkbox"/> EE/Estonia | <input checked="" type="checkbox"/> SK/Slovakia and utility model |
| <input checked="" type="checkbox"/> ES/Spain | <input checked="" type="checkbox"/> SL/Sierra Leone |
| <input checked="" type="checkbox"/> FI/Finland and utility model | <input checked="" type="checkbox"/> TJ/Tajikistan |
| <input checked="" type="checkbox"/> GB/United Kingdom | <input checked="" type="checkbox"/> TM/Turkmenistan |
| <input checked="" type="checkbox"/> GE/Georgia | <input checked="" type="checkbox"/> TR/Turkey |
| <input checked="" type="checkbox"/> GH/Ghana | <input checked="" type="checkbox"/> TT/Trinidad and Tobago |
| <input checked="" type="checkbox"/> HU/Hungary | <input checked="" type="checkbox"/> UA/Ukraine |
| <input checked="" type="checkbox"/> IL/Israel | <input checked="" type="checkbox"/> UG/Uganda |
| <input checked="" type="checkbox"/> IS/Iceland | <input checked="" type="checkbox"/> US/United States of America |
| <input checked="" type="checkbox"/> JP/Japan | <input checked="" type="checkbox"/> UZ/Uzbekistan |
| <input checked="" type="checkbox"/> KE/Kenya | <input checked="" type="checkbox"/> VN/Viet Nam |
| <input checked="" type="checkbox"/> KG/Kyrgyzstan | <input checked="" type="checkbox"/> YU/Yugoslavia |
| <input checked="" type="checkbox"/> KP/Democratic People's Republic of Korea | <input checked="" type="checkbox"/> ZW/Zimbabwe |
| <input checked="" type="checkbox"/> KR/Republic of Korea | |
| <input checked="" type="checkbox"/> KZ/Kazakhstan | |
| <input checked="" type="checkbox"/> LC/Saint Lucia | |
| <input checked="" type="checkbox"/> LK/Sri Lanka | |
| <input checked="" type="checkbox"/> LR/Liberia | |
| <input checked="" type="checkbox"/> LS/Lesotho | |
| <input checked="" type="checkbox"/> LT/Lithuania | |
| <input checked="" type="checkbox"/> LU/Luxembourg | |

Check-boxes reserved for designating States (for the purposes of a national patent) which have become party to the PCT after issuance of this sheet:

- ☐
- ☐
- ☐
- ☐
- ☐

In addition to the designations made above, the applicant also makes under Rule 4.9(b) all designations which would be permitted under the PCT except the designation(s) of

The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.)

Box No. VI PRIORITY CLAIMFurther priority claims are indicated in the Supplemental Box ☐

The priority of the following earlier application(s) is hereby claimed:

Country (in which, or for which, the application was filed)	Filing Date (day/month/year)	Application No.	Office of filing (only for regional or international application)
item (1) DK	04.09.1996 (4 September 1996)	0953/96	
item (2) DK	10.02.1997 (10 February 1997)	0150/97	
item (3)			

Mark the following check-box if the certified copy of the earlier application is to be issued by the Office which for the purposes of the present international application is the receiving Office (a fee may be required):

☒ The receiving Office is hereby requested to prepare and transmit to the International Bureau a certified copy of the earlier application(s) identified above as item(s): (1) + (2)
Box No. VII INTERNATIONAL SEARCHING AUTHORITY

Choice of International Searching Authority (ISA) (If two or more International Searching Authorities are competent to carry out the international search, indicate the Authority chosen; the two-letter code may be used): ISA / EP

Earlier search Fill in where a search (international, international-type or other) by the International Searching Authority has already been carried out or requested and the Authority is now requested to base the international search, to the extent possible, on the results of that earlier search. Identify such search or request either by reference to the relevant application (or the translation thereof) or by reference to the search request:

Country (or regional Office):

Date (day/month/year):

Number:

Box No. VIII CHECK LIST

This international application contains the following number of sheets:

1. request : 3 sheets
 2. description : 34 sheets
 3. claims : 6 sheets
 4. abstract : 1 sheets
 5. drawings : 14 sheets

Total : 58 sheets

This international application is accompanied by the item(s) marked below:

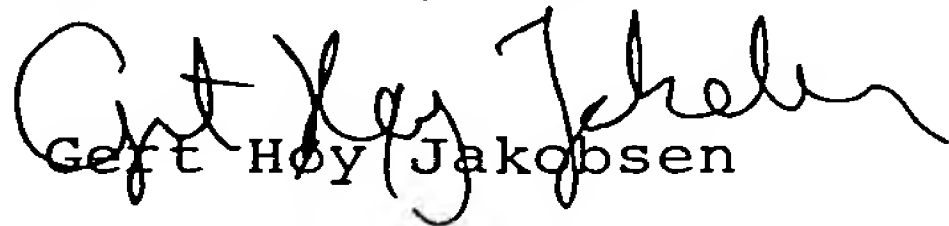
1. ☐ separate signed power of attorney
 2. ☐ copy of general power of attorney
 3. ☐ statement explaining lack of signature
 4. ☐ priority document(s) identified in Box No. VI as item(s):
 5. ☒ fee calculation sheet
 6. ☐ separate indications concerning deposited microorganisms
 7. ☐ nucleotide and/or amino acid sequence listing (diskette)
 8. ☐ other (specify):

Figure No. 1 of the drawings (if any) should accompany the abstract when it is published.**Box No. IX SIGNATURE OF APPLICANT OR AGENT**

Next to each signature, indicate the name of the person signing and the capacity in which the person signs (if such capacity is not obvious from reading the request).

Copenhagen, 4 September 1997

PLOUGMANN, VINGTOFT & PARTNERS A/S


 Gert Høj Jakobsen

For receiving Office use only

1. Date of actual receipt of the purported international application:	2. Drawings: <input type="checkbox"/> received: <input type="checkbox"/> not received:
3. Corrected date of actual receipt due to later but timely received papers or drawings completing the purported international application:	
4. Date of timely receipt of the required corrections under PCT Article 11(2):	
5. International Searching Authority specified by the applicant: ISA /	
6. <input type="checkbox"/> Transmittal of search copy delayed until search fee is paid	

For International Bureau use only

Date of receipt of the record copy by the International Bureau:

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :
G01N 15/14, 33/543, B03C 1/035

A1

(11) International Publication Number: **WO 98/10267**

(43) International Publication Date: 12 March 1998 (12.03.98)

(21) International Application Number: PCT/DK97/00368

(22) International Filing Date: 4 September 1997 (04.09.97)

(30) Priority Data:
0953/96 4 September 1996 (04.09.96) DK
0150/97 10 February 1997 (10.02.97) DK

(71) Applicant (for all designated States except US): TECHNICAL UNIVERSITY OF DENMARK [DK/DK]; DTU - Building 101 A, DK-2800 Lyngby (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): BLANKENSTEIN, Gert [DE/DE]; Wiesinger Weg 5, D-20253 Hamburg (DE).

(74) Agent: PLOUGMANN, VINGTOFT & PARTNERS A/S; Sankt Annae Plads 11, P.O. Box 3007, DK-1021 Copenhagen K (DK).


(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: A MICRO FLOW SYSTEM FOR PARTICLE SEPARATION AND ANALYSIS

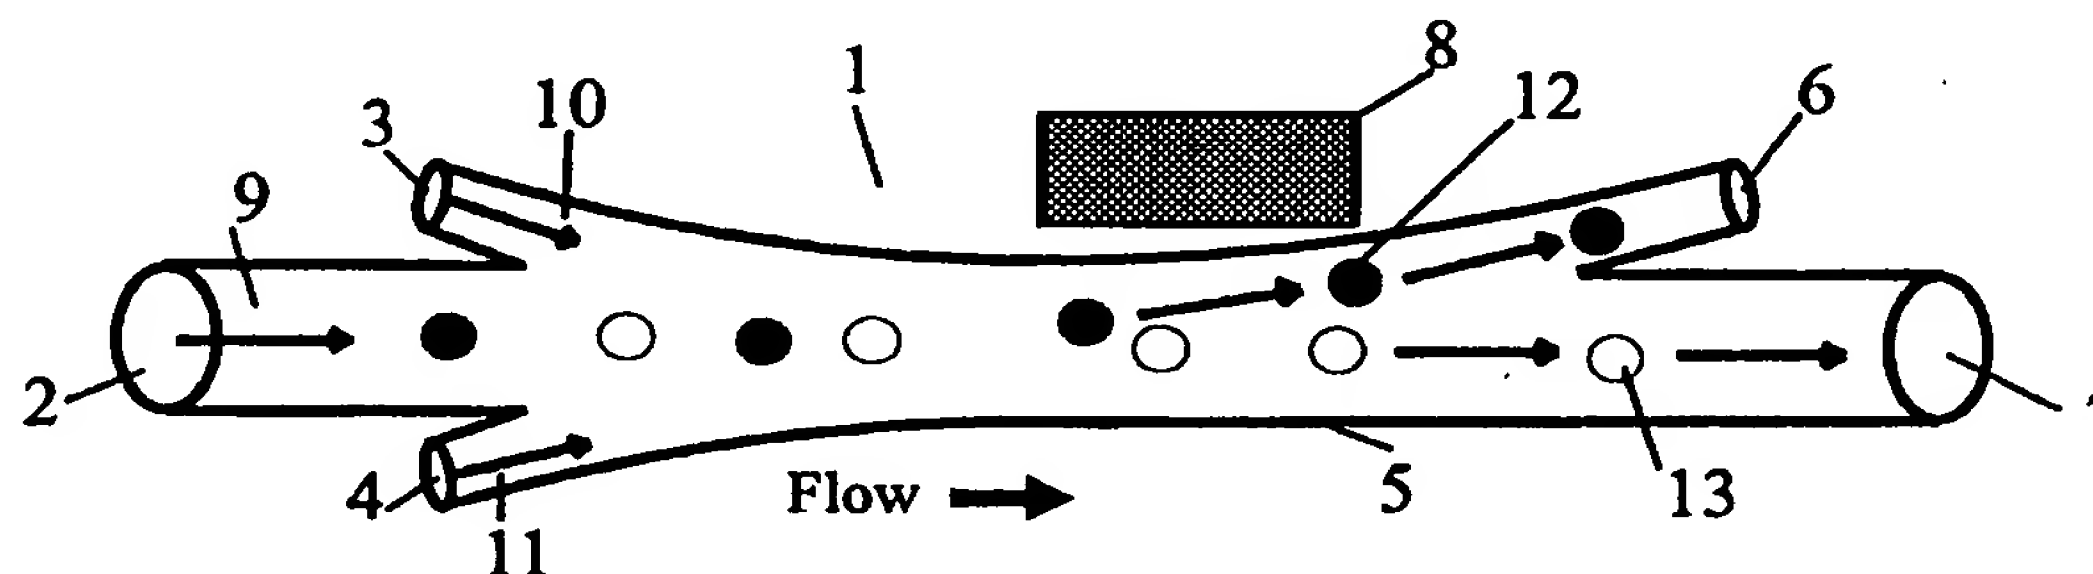**(57) Abstract**

A micro flow system is provided for separating particles, comprising a microfabricated member having a flow channel (5) defined therein for guiding a flow of a fluid containing the particles through the flow channel, first inlet means (2) positioned at one end of the flow channel for entering the fluid into the flow channel, first outlet means (7) positioned at the other end of the flow channel for discharging the fluid from the flow channel, the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross section of the flow channel, the member being positioned in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field across the flow channel are deflected in the direction of the field. Further, a micro flow system is provided for analysing components of a fluid comprising a microfabricated member having a flow channel defined therein for guiding a flow of a fluid through the flow channel, first inlet means for entering particles into the flow channel, first outlet means for discharging of fluid from the flow channel and a plurality of assay sites located in the flow channel and comprising immobilised reagents whereby the fluid may be analyzed for a plurality of components while residing in the flow channel.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A MICRO FLOW SYSTEM FOR PARTICLE SEPARATION AND ANALYSIS

FIELD OF THE INVENTION

5 The present invention relates to methods and apparatuses for detection, separation, sorting, and analysis of particles, such as cells, cell organelles, beads, molecules, such as Deoxyribonucleic acid (DNA), proteins, etc. in a fluid. In particular, the invention relates to particle separation by using different forces such as magnetic, electrophoretic, hydrodynamic and/or gravitational forces, e.g. for utilisation in flow cytometry, light microscopy, electrophoretic separation, magnetophoresis,
10 etc.

BACKGROUND OF THE INVENTION

Flow cytometry is a well known technique that is used for high throughput measurements of
15 optical and/or electrical characteristics of microscopic biological samples. Flow cytometry instruments analyse and isolate cells and organelles with particular physical, biochemical, and immunological properties.

Traditionally, cell sorting by flow cytometry (fluorescence activated cell sorting) has been the
20 method of choice for isolation of specific cell populations by surface markers. However, cell sorting by flow cytometry suffers from several drawbacks, especially high dilution of desired cell sample, low speed and sterility problems. Furthermore, the equipment is very costly with high operation and maintenance cost, making the technique available only to a limited number of laboratories.

25 During the last few years, isolation of cells by antibody-coupled magnetic beads and carriers has been developed into a reliable tool for the isolation and characterisation of cell populations. Immunomagnetic cell separation, e.g. as commercially introduced by Dynal A/S and Miltenyi Biotec, has become an established method for cell analysis in clinical diagnostics. Due to the relatively low prize, this method is attractive in flow cytometry, especially in sorting of rare
30 cellular events. For example, sorting of fetal cells contained in maternal blood sample provides a non-invasive alternative to prenatal diagnostic procedures, such as amniocentesis of chorionic villus sampling. Another rare event scenario is the detection of low concentration of cancer cells which has an important role in diagnosis of minimal residual disease and evaluation of appropriate therapies. Another medical application for cell sorting systems is the diagnosis of
35 bacterial and viral diseases.

Although this method offers relatively inexpensive approach to sort rare cellular event, it adds considerable time onto the overall rare event detection and it does not offer the multiparameter

analysis readily available with flow cytometry techniques. Existing techniques for magnetic separation are suffering from the low purity of the sorted cell fraction and the low recovery rate of the sorted cells. In most systems several washing steps have to be implemented into the separation procedure which then causes cell losses. Additionally small subpopulation of labelled
5 cells cannot be directly isolated by existing magnetic separation techniques.

A good overview about fluorescence activated cell sorting procedures and magnetic activated cell sorting is given in Melamed et. al., "Flow Cytometry and Sorting, (Ed. Melamed et. al., Wiley & Sons Inc., 1990).

10

SUMMARY OF THE INVENTION

Advances in microfabrication and microfluidic technologies continue to fuel further investigation into the miniaturisation of bioanalytical instruments and biochemical assays in general. The
15 present invention relates to development of a low cost non-invasive diagnostic test method and devices for carrying out such tests that include measuring, monitoring, sorting and analysing samples containing particles, such as organic cells, microbeads, cell organelles and macromolecules such as DNA. The present invention provides a cheap, fast and reliable method and devices for handling, sorting and analysis of such particles.

20

Separation may be performed according to various physical properties, such as fluorescent properties or other optical properties, magnetic properties, density, electrical properties, etc. According to an important aspect of the invention, particle separation is performed by aligning the particles in one row of particles in a micro flow channel so that particles can be treated
25 individually.

Thus, it is an object of the present invention to provide a micro flow system and a method of particle separation having an improved efficiency of particle separation compared to the prior art.

30 It is another object of the present invention to provide a micro flow system and a method for particle separation in which cell lysis is minimised.

It is yet another object of the present invention to provide an improved method for preparation of fluids containing particles for separation and analysis of the particles.

35

It is a still further object of the present invention to provide a micro flow system and a method for simultaneous separation of particles into a plurality of groups of particles.

It is a still further object of the present invention to provide a micro flow system including facilities for pre-treatment and/or post-treatment of a sample.

It is a still further objective of the invention is develop a system for separation and analysis of fetal cells in whole maternal blood samples using an integrated automated micro flow system. The system is designed by downscaling and combining different methods for handling, manipulation and analysis of biochemical samples. Thus, prenatal diagnostics by analysis of fetal cells separated from a whole maternal blood sample is an area, which can benefit from advances in miniaturisation.

It is another objective of the invention is develop a system for separation and analysis of cancer cells from a sample containing cancer cells and healthy cells using an integrated automated micro flow system. The system is also designed by downscaling and combining different methods for handling, manipulation and analysis of biochemical samples. Thus, cancer diagnostics by analysis of cancer cells separated from healthy cells is also an area which can benefit from advances in miniaturisation.

According to a first aspect of the invention the above and other objects are fulfilled by a micro flow system for separating particles, comprising a member having

a flow channel defined therein for guiding a flow of a fluid containing the particles through the flow channel,

first inlet means positioned at one end of the flow channel for entering the fluid into the flow channel,

first outlet means positioned at the other end of the flow channel for discharging the fluid from the flow channel,

the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross-section of the flow channel,

the member being positioned in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field across the flow channel are deflected in the direction of the field.

According to a second aspect of the invention the above and other objects are fulfilled by a method of separating particles, comprising the steps of

guiding a flow of a fluid containing the particles through a flow channel in such a way that one particle at the time passes a cross-section of the flow channel,

5 positioning the flow channel in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field across the flow channel are deflected in the direction of the field and thereby separated from the fluid.

10 According to a third aspect of the invention the above and other objects are fulfilled by a micro flow system for separating particles, comprising a member having

a flow channel defined therein for guiding a flow of a fluid containing the particles through the flow channel,

15 first inlet means positioned at one end of the flow channel for entering the fluid into the flow channel,

20 first and second outlet means positioned at the other end of the flow channel for discharging of fluid from the flow channel,

the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross-section of the flow channel,

25 monitoring means positioned at the flow channel for monitoring parameters of a particle residing within a measurement volume within the flow channel and providing an output signal corresponding to a monitored parameter,

30 control means for controlling passage of fluid through the first and the second outlet means, respectively, in response to the output signal of the monitoring means whereby particles may be separated according to values of a parameter monitored by the monitoring means.

According to a fourth aspect of the invention the above and other objects are fulfilled by a method of separating particles, comprising the steps of

35 guiding a flow of a fluid containing the particles through a flow channel in such a way that one particle at the time passes a cross-section of the flow channel, the flow channel having first and second outlet means for discharging of fluid from the flow channel,

monitoring parameters of a particle residing within a measurement volume within the flow channel and

- 5 controlling passage of fluid through the first and the second outlet means, respectively, in response to a monitored parameter value whereby particles may be separated according to values of a monitored parameter.

According to a preferred embodiment of the invention, a method of separating fetal cells from
10 maternal cells, comprising the steps of selective magnetically staining of fetal cells in a fluid containing fetal and maternal cells, guiding a flow of the fluid containing the fetal cells through a flow channel in such a way that one fetal cell at the time passes a cross-section of the flow channel, positioning the flow channel in a magnetic field that is substantially perpendicular to a longitudinal axis of the flow channel so that magnetically stained fetal cells residing in the flow
15 channel are deflected in the direction of the magnetic field.

Further a method is provided for separating cancer cells from other cells, comprising the steps of selective magnetically staining of cancer cells in a fluid containing cancer and other cells, guiding a flow of the fluid containing the cancer cells through a flow channel in such a way that one
20 cancer cell at the time passes a cross-section of the flow channel, positioning the flow channel in a magnetic field that is substantially perpendicular to a longitudinal axis of the flow channel so that magnetically stained cancer cells residing in the flow channel are deflected in the direction of the magnetic field.

- 25 The particles to be separated from other particles in a fluid and/or to be separated from the fluid containing the particles may comprise living cells, chromosomes, organelles, beads, biomolecules, such as Deoxyribonucleic acid (DNA), proteins, etc.

Preferably, the flow through the flow channel is a laminar flow so that flow of particles are
30 predictable and easy to control, e.g. with a flow of guiding buffers.

When the flow is laminar, the stream of particles can be positioned as desired within the flow channel, e.g. by controlling flow velocities of the fluid containing particles at the particle inlet of the member and flow velocities of guiding buffers at corresponding inlets.

- 35 Preferably, the flow channel is small for the flow through the channel to have a low Reynolds number, e.g. in the range of 0.01-500, such as 0.05-50, preferably 0.1-25. Thereby, inertial effects, which causes turbulence and secondary flows are negligible, viscous effects dominate the

dynamics, and mixing is caused only by diffusion. Flow of the sample, which is the fluid containing particles and guiding buffers can be laminated in guided layers through the channel and displacement of particles in the channel is only caused by the external force applied. The Reynolds number referred to is based on the hydraulic diameter of the flow channel, the flow velocity in the axial direction and the fluid density and viscosity, $Re = \rho Dh / \mu$ where the hydraulic diameter Dh is defined as four times the cross-sectional area divided by the wetted perimeter.

The illustrated flow channels of the micro flow system have a width ranging from 0.1 to 0.55 mm, preferably ranging from 0.1 to 0.4 mm, in particular ranging from 0.1 to 0.2 mm, and a depth ranging from 0.04 to 0.2 mm, preferably ranging from 0.04 to 0.1. With respect to the lowest cross-sectional area of the flow channel, it is preferred that this area is in the range of 0.004 to 0.11 mm², in particular in the range of 0.004 to 0.02 mm².

It is believed that any length of the flow channel within the range of 0.1 to 20 mm, preferably 1.0 to 3.5 mm, would lead to satisfactory results.

Preferably, the system is operating with total volumetric flow rates of 0.1 up to 200 μ l/min, which gives a flow velocity of 15 mm/min up to 180 mm/min. The average residence time of a particle inside the flow channel, which corresponds to a separation time ranging from 0.1 to 6 sec. The residence time of the sample is defined by the total volumetric flow rate of the system.

The micro flow system may comprise flow rate adjustment means for adjustment of the time the particles reside in the flow channel.

Preferably, the fluid channel is sized so that for efficient separation, particles are displaced 10 - 30 μ m in the flow channel. Thereby, the particle may only be exposed to a field for a very short period of time and thus, continuous separation of particles may be facilitated.

In order to collect the particles, which are deflected in the flow channel, the micro flow system may further comprise second outlet means for discharging particles having been deflected in the flow channel.

The micro flow system may comprise second inlet means for entering a first guiding buffer into the flow channel together with the fluid containing particles. When the flow is laminar, the two fluids flow through the flow channel in parallel abutting each other along a small area extending along a longitudinal axis of the flow channel whereby the cross-section and the path through the flow channel of the flow of the fluid containing particles may be controlled by the first guiding buffer flow. Further, particles in the fluid containing particles may be deflected into the guiding

buffer fluid when the two fluids pass the field essentially perpendicular to the longitudinal axis of the flow channel. Furthermore, two (or even more) outlets may be provided at the down stream end of the flow channel for discharging the guiding buffer now containing separated particles and fluid substantially without particles susceptible to the field essentially perpendicular the flow channel, correspondingly.

The micro flow system may further comprise third inlet means for entering a second guiding buffer for improved control of the path of particle flow through the flow channel. By adjustment of the flow velocities of the guiding buffers and the fluid containing particles, the flow within the flow channel of fluid containing particles may be controlled to flow within an essentially cylindrical shaped domain with a longitudinal axis extending substantially parallel to a longitudinal axis of the flow channel and further the position within the flow channel and the diameter of the flow cylinder may be controlled by corresponding adjustments of the volumetric ratio between the flow rate of the fluid containing particles and the flow rate of the guiding buffers.

It is possible to control the cross-sectional area of the domain containing the sample to be a little larger than the cross-sectional area of the particles by adjusting the volumetric flow rates of the sample and of the one or two guiding buffers in such a way that the particles contained in the sample are aligned in a single row of particles. This is a very important feature since it enables individual treatment of each particle and it leads to a sensitive method of sorting particles according to their susceptibility to a field. A sample flow layer thickness less than 1 μm may be achieved.

Preferably, the channel depth is small enough, e.g. below 50 μm , to allow observation of the particles flowing through the channel by a microscope. In an important embodiment of the present invention, the micro flow system comprises a cover, e.g. a transparent or translucent cover, for covering the flow channel. When the cover is transparent or translucent, it will be possible to observe events in the flow channel, e.g. passage of a stained or coloured particle or cell.

The member with the flow channel may be produced from any suitable material, such as silicon, polymers, such as Plexiglas, Teflon, etc., glass, ceramics, metals, such as copper, alumina, stainless steel, etc., etc.

The channel may be provided in the member by any suitable manufacturing process, such as milling, etching, etc.

In a preferred embodiment of the invention, the member is a silicon chip manufactured utilising photolithography and the channel is etched into the silicon chip.

5 The field may be a magnetic field, an electric field, a gravity field, etc., and any combination of such fields.

A magnetic field may be generated by permanent magnets, such as rare earth magnets, such as samarium-germanium magnets, a mixture of ferromagnetic powder and epoxy, etc., etc., electromagnets, e.g., in silicon integrated electromagnets, etc. The magnets are preferably
10 positioned adjacent to the flow channel so that the magnetic field is substantially perpendicular to a longitudinal axis of the flow channel.

In a preferred embodiment of the invention, the magnets are positioned in and glued to rectangular slots that are etched into a silicon chip. The slots are located adjacent to the
15 separation flow channel. In the example shown in Fig. 1, a permanent magnet or an electromagnet can be received by slots in the micro flow system. The slots are, e.g., 0.5 mm wide, 0.5 mm long and 0.2 mm deep. For generation of a magnetic field, a solid magnetic block, i.e. rare earth magnet can be glued into the slot. Alternatively, a mixture of ferromagnetic powder and epoxy can be injected into the slots to produce a high magnetic field gradient.

20

The strength of the magnetic field inside the micro flow system may be adjustable. If an electromagnet is used for generation of the magnetic field, the magnitude of the field may be varied by varying the amplitude of the voltage input to the electromagnet. If a permanent magnet
25 generated the magnetic field, the magnitude of the field may be varied by varying the distance between the magnet and the flow channel of the micro flow system.

As already mentioned, the net displacement of a particle in the micro flow system depends on the force applied to it by the field. This can be utilised for separation of a first group of particles of various types in a fluid into a plurality of set of particles; each set comprising a specific type of
30 particles. A micro flow system with e.g. five separation outlets may be used to separate a fluid containing particles into five sets of particles, each set comprising particles that are influenced by the field with a force of a specific magnitude, in the following denoted particles with a specific F-value. Particles with a low F-value are only deflected by a small amount by the field and are discharged from the flow channel through a corresponding outlet port. Particle deflection is
35 increased with increasing F-values whereby such particles are discharged from the flow channel through the corresponding other outlets.

The particles to be separated from other particles in a fluid and/or to be separated from the fluid containing the particles may be magnetically stained to facilitate separation in a magnetic field.

In the present context, the term staining is to be understood in a broad sense. The term is intended to cover any way of marking a particle thereby facilitating detection of the particle. For example a cell may be stained with a fluorescent substance, such as acridin orange, methylene blue, etc, facilitating detection of the stained particles by a fluorescence detector, or, a particle is said to be magnetically stained when it is coupled to a magnetic microbead. The microbead may for example carry a monoclonal or polyclonal antibody on its surface for coupling to an antigene of a cell to be separated utilizing a magnetic field.

In the case where particles have to be detected in a flow channel by optical means, such particles are preferably stained with a chromophoric reagent, or, a fluorescent probe.

An electric field may be generated by electrodes, such as metal electrodes, such as gold electrodes, etc. The electrode may be positioned inside the flow channel, e.g. to introduce electrophoretic forces, e.g. for separation of charged molecules in the fluid, or outside the flow channel e.g. to introduce dielectrophoretic forces, e.g. for separation of particles contained in the flow according to the susceptibility of the particles to the field. Preferably, the electrodes are positioned in such a way that the electric field is essentially perpendicular to a longitudinal axis of the flow channel.

The electric field may be a high frequency field, e.g. a 5 MHz field generated by electrodes positioned inside the flow channel. Living cells positioned in an electric field will be polarized and will be influenced by the field and thus, an alternating field may be used to separate living cells from other particles.

The field generated across the flow channel may be utilised for immobilisation of particles whereby particles may be held in substantially fixed positions within the flow channel for a specific period, e.g. as outlined in Fig. 6, allowing chemical reactions with the particles to take place and/or kinetic measurements on the particles to be performed and/or to bring the particles into contact with different chemical substances or for separating the particles from the sample. The particles may undergo a washing step before removal or reduction of the field redisperses them.

According to a fifth aspect of the invention the above and other objects are fulfilled by a micro flow system for separating particles, comprising a member having

a flow channel defined therein for guiding a flow of a fluid containing the particles through the flow channel,

inlet means positioned at one end of the flow channel for entering the fluid into the flow channel,

field generating means positioned proximate to the other end of the flow channel for generating a field substantially along a longitudinal axis of the flow channel whereby the particles are drawn by the field along the channel and distributed according to their susceptibility to the field and their mobility.

For example, means for generating a magnetic field may be situated at the closed end of a micro flow channel, which at the other end has at least one inlet for entering a sample containing magnetic labelled macromolecules, i.e. ribonucleic acid or proteins. The sample is entered into the channel where the particles are drawn by the magnetic field along the channel and, as by electrophoresis, the particles will be distributed according to their susceptibility to the magnetic field and their mobility. The generated magnetic field is removed after a predetermined time interval and the distribution of particles can then be observed.

According to another embodiment of the invention, the flow through the sort outlet is not continuous but only allowed by a controlling means, e.g. a valve, when a particle with the desired characteristics is detected by a detection means. The particles are sorted using hydrodynamic forces in the sense that the flow is diverged from the ordinary outlet to the sort outlet only when it contains a particle that fulfils certain criteria. The concentration of sorted particles in the flow out of the sort outlet will consequently be high. This is especially an advantage for sample flow with rare occurrence of particles that are searched for. The detection means can be e.g. optical detection means or magnetic detection means e.g. a Hall sensor or means for detecting e.g. electrical or other properties of the particles. The detection means can in an alternative embodiment be used for counting of particles with the desired characteristics as a separate function or in connection with any of the other embodiments described herein.

In yet another embodiment, the field strength is adjustable, e.g. by adjusting the voltage supplied to an electromagnet or to a set of electrodes or by adjusting the distance from a permanent magnet to the flow channel. Particles are in a first operation mode entrapped inside the flow channel by the field at high intensity while at the same time the sort outlet is closed. In a second operation mode, the field is reduced and the sort outlet is open in such a way that the entrapped particles are redispersed and moved out of the sort outlet. Particles that are rare in the sample can by switching between these two operational modes be sorted out in a highly concentrated form. An example of this embodiment is outlined in Fig. 6.

In a further interesting embodiment, the micro flow system according to the invention involves facilities for performing pre-treatment and/or post-treatment of the fluid comprising the particles. These possibilities are outlined in Figs. 5(f), 7 and 10. As an example, the particles may be treated
5 with a reagent before entering the flow channel, e.g. undergo magnetic or chromophoric staining. Post-treatment may comprise means for collecting or concentrating the deflected particles or means for contacting the deflected particles with one or more reagent(s).

By one possible combination of the pre-treatment and the post-treatment facilities, cells may
10 undergo magnetic staining before entering the flow channel, and after separation the staining may be removed by treatment of the stained cells with a suitable reagent.

It is an important advantage of the present invention that a micro flow system is provided that operates continuously with no requirement for operator intervention.

15 It is another advantage of the present invention that separation may be performed in one step.

It is still another advantage of the present invention that the particles can be separated in a continuous flow without substantially interfering with the flow itself and that separated particles
20 may be collected at corresponding separated outlets of the flow channel without having to interrupt the flow in the flow channel.

It is another important advantage of the invention that the particles contained in the sample by the adjustment of the flow rate of one or more guiding buffers can be lined up in one row such
25 that the particles can be analysed and sorted individually. This results in a sorting system with the highest sensitivity to the susceptibility of the single particle to the field applied to the sorting channel and a sorting system with the highest resolution of the detection means of the characteristics exhibited by the particles.

30 It is yet another advantage of the present invention that the micro flow system is easily integrated into other continuous flow systems, such as flow cytometers, flow injection analysis systems, etc.

It is a further advantage of the present invention that particles may be separated into a plurality
35 of groups of particles, e.g. different subpopulations of cells, based on different susceptibility to the field generated across the flow channel of the different groups of particles. This may be obtained by using a multiple outlet micro flow system as outlined in Fig. 5(c).

It is a still further advantage of the present invention that the micro flow system allows observation of particles in the flow channel using a microscope.

It is a still further advantage of the invention that a closed system is provided allowing
5 biohazardous samples, such as samples containing pathogens, to be entered into the system without contaminating the laboratory environment and without causing hazard for operators working with pathogen biomaterials.

It is a still further advantage of the invention that a system with a low shear stress in the flow is
10 provided allowing a gentle treatment of biological samples, e.g. fragile living cells, especially when two guiding buffers are introduced in the channel.

It is a still further advantage of the invention that a high concentration of the sorted particles can be obtained even from samples with rare occurrence of particles that are searched and sorted for.
15

According to an important aspect of the invention, a new system for immunomagnetic cell separation and manipulation is provided that utilises a silicon based micro fabricated flow chip. The system combines the advantage of flow cytometry and immunomagnetic separation technique. The flow chip will be an important component of a portable micro system for cell
20 sorting and analysis. The flow chip is designed for rapid immunomagnetic cell separation nearly without any pressure drop. Its simple and cheap fabrication and versatile sorting and detection properties offer an alternative to conventional cell separation systems.

It is an advantage of the invention that a micro flow system is provided that is cheap, easy to
25 operate, versatile, simple and portable and that offers the possibility of automation.

A miniaturised flow channel system is provided that utilises the advantageous fluid behaviour in micro systems. The invented system operates continuously. Instead of holding back the magnetisable particles in the separation unit, the particles are deflected into the direction of the
30 magnetic field while passing it continuously. By splitting the fluid flow into two or more outlets, the deflection of the particles can be used for separation of particles into different sets of particles, each of which leaves the flow channel through a specific outlet.

The continuous separation system (CSS) allows efficient enrichment as well as depletion of
35 labelled sample contents of interest. The CSS is designed to fit under a microscope allowing parallel detection of the optical properties of the sample and the control of separation of particles.

An advantage of the geometry of the invented separation flow channel is that a magnetised or electrically charged particle has to be moved only over a distance of 10 - 30 μm to be separated from the fluid containing particles.

- 5 Furthermore, the invention enables isolation of multiple cell or particle subpopulations from a single sample at the same time. The magnitude and direction of the force F on a magnetisable particle, e.g. a magnetically labelled cell, is dependent on the magnitude of the magnetic field and the number of magnetic moments inducible on a labelled cell.

10 $F = N \cdot S \cdot \mu_B \cdot \text{grad } B$

where S is the number of Bohr magnetons (μ_B) per particle and N is the number of particles per cell.

- 15 Beads with small S are moving a less distance in lateral direction in relation to the flow through the flow channel than beads with a higher S value. This can be used to separate subpopulation of cells labelled with different magnetisable beads: By splitting the flow channel in various outlet channels cells can be distinguish and separated due to their individual F values.

- 20 The drag force on a spherical particle can be found from the particle Reynolds number, based on particle diameter, particle velocity relative to the fluid and fluid viscosity and density. In a flow with a Reynolds number less than 100, the drag force D on the particle can be found from a modified version of Stokes law

$$D = 3\pi\mu U d \left(1 + \frac{3}{16} \text{Re}\right)^{\frac{1}{2}}$$

- where μ denotes the viscosity of the liquid, U is the relative velocity of the particle and d is the
 25 diameter. The numerical value of the parenthesis on the right hand side of the above formula is close to unity for Reynolds numbers less than one why it in that case can be omitted. The magnitude of the drag force on the particles, the force applied to the particle by the field, the distance the particle needs to be moved and the time available for the separation are all important aspects to be considered when a separation process and the device for carrying it out is
 30 designed.

An example is given for separation by gravitational means. The effective gravitational force G defined as the gravitational force minus the buoyancy force is found as

$$G = (\rho_{\text{particle}} - \rho_{\text{liquid}}) g \frac{\pi}{6} d^3$$

where g is the gravitational constant. For simplicity, a Reynolds number for the particle of less than one is assumed why the drag force D is given in a simple form. These two forces, D and G , are equal when the maximum velocity, the settling velocity U_{∞} has been reached. This velocity is
5 found as

$$U_{\infty} = \frac{(\rho_{particle} - \rho_{liquid})g d^2}{18\mu}$$

The velocity to a given time t can be found as

$$U(t) = U_{\infty}(1 - e^{-t \frac{g}{U_{\infty}}})$$

10 For a particle submerged in water with a diameter of $30 \mu m$ and a density of 1.2 times the density of water the settling velocity is $9 \times 10^{-5} m/s$. The particle will reach 90 % of this velocity after 2.1×10^{-5} seconds why the transient phase can be neglected. It will take the particle 0.33 seconds to travel a distance of $30 \mu m$, which makes the method reasonable to employ for separation purposes.

15

While instrumentation in chemistry and biochemistry has become more automated in recent years, the preparation of samples remains a highly laboratory intensive task. The demand is increasing for high throughput, easier to use cost effective analytical devices and assays. Creating this opportunity is e.g. the world-wide effort to sequence the Human Genome, resulting in the
20 development of new DNA diagnostics and therapeutics. Another important trend is the minimisation of health care costs and hospital admissions by testing patients and monitoring therapeutic use in less expensive environments, the so-called point-of-care analysis.

Micro flow devices containing arrays of nucleic acid hybridisation sites, known as genosensors, are
25 being developed for a variety of uses in genomic analysis. A great deal of the overall genosensor development effort involves optimisation of experimental conditions in the actual use of genosensors.

Another embodiment of the invention is dealing with a low-tech form of genosensor and
30 immunosensor technology, involving arrays of oligonucleotides on a microchip, which can be used to define optimal operating conditions and to develop applications of hybridisation arrays in genome mapping and sequencing. The genosensor array is placed in a micro flow channel system allowing an operation in a flow-through mode. Thus several steps of microliquid handling, e.g. washing and staining steps, reagent addition, can be integrated as an automated routine

procedure. Additionally, micro flow devices containing arrays of antibody/antigen sites, known as immunosensors, can be designed in the same way. The system could be used for combinatorial screening (high-throughput screening) and pharmacokinetic studies.

5 According to a sixth aspect of the invention the above and other objects are fulfilled by a micro flow system for analysing components of a fluid, comprising a member having a flow channel defined therein for guiding a flow of a fluid through the flow channel, first inlet means for entering particles into the flow channel, first outlet means for discharging of fluid from the flow channel and a plurality of assay sites located in the flow channel and comprising immobilised
10 reagents whereby the fluid may be analyzed for a plurality of components while residing in the flow channel.

The system may further comprise field generating means positioned proximate to at least some of the assay sites for generation of a field proximate to the corresponding assay site whereby
15 reagents residing in the flow channel and being susceptible to the field when generated at a selected assay site are attracted to and immobilised at the selected assay site, or, are rejected from the selected assay site.

In an embodiment of the invention, the member comprises a plurality of flow channels arranged
20 in parallel or in series and each of which has assay sites whereby the fluid containing particles is brought into contact with a large number of assay sites.

According to a seventh aspect of the invention, a method of analysing components of a fluid is provided, comprising the steps of entering a fluid containing the particles into a flow channel and
25 allowing the fluid to flow in the channel, the channel having a plurality of assay sites, each of which comprises immobilised reagents whereby the fluid can be analyzed for a plurality of components while residing in the channel.

According to a eighth aspect of the invention, a method of forming assay sites comprising
30 immobilised reagents in a flow channel is provided, the method comprising the steps of

preparing selected surfaces of the assay sites for immobilisation of selected reagents,

dispensing a selected reagent proximate to a corresponding selected assay site, and
35

generating a field proximate to the selected site whereby the reagent is attracted towards and brought into contact with the surface of the selected assay site by the field generated and is immobilised upon contact with the surface.

Thus, the micro flow system of the previous section with a flow channel with assay sites may further comprise field generating means positioned proximate to at least some of the areas adapted to comprise immobilised reagents, each field generating means generating a field proximate to the corresponding area whereby reagents entering the flow channel and being susceptible to the field generated at the area are attracted to and immobilised at the area or are rejected from the area. Alternatively, the width of the channel of the micro flow system can be extended to accommodate a two-dimensional grid of areas to comprise immobilised reagents with fields generating means positioned proximate to at least some of these areas. In another embodiment the micro flow system for analysing a sample with a large number of reagents simultaneously may consist of an array comprising a number of parallel channels each with a plurality of areas adapted to comprise immobilised reagents located in the flow channels and further comprising field generating means to generate a field proximate to the areas whereby reagents being susceptible to the field are immobilised at the area. The field generating means may be e.g. permanent magnets, electrodes or electromagnets.

The devices with assay sites enable rapid manipulation, detection, and analysis of macromolecules, particles and cells in biologic or chemical samples in that a plurality of tests can be performed on the same microchip. According to the invention, micro flow systems and molecular biology are combined.

BRIEF DESCRIPTION OF THE DRAWINGS

Exemplary embodiments of the invention will now be described with reference to the accompanying drawings in which

5

Fig. 1 illustrates the operation of particle separation according to the present invention,

10

Fig. 2 shows a cross-sectional view of a separation flow channel according to the present invention. (a) shows the main embodiment and (b) shows a cross-sectional view of a separation flow channel for gravitational separation,

Fig. 3 shows a micro flow system with electrodes as field generating means,

15

Fig. 4 shows a flow diagram of a magnetic particle separation apparatus according to the present invention,

20

Fig. 5 shows flow diagrams of various embodiments of the present invention. (a)-(d) show embodiments with various numbers of inlets and outlets, and (e) shows an embodiment with an enlarged separation chamber, and (f) shows an embodiment with an enlarged chamber for collecting separated particles,

Fig. 6 illustrates entrapment of magnetic particles in a flow channel,

25

Fig. 7 shows a flow diagram for optical detection and hydrodynamic separation using a blocking valve,

Fig. 8 shows a flow diagram for optical detection and hydrodynamic separation using syringe pumps,

30

Fig. 9 shows a flow diagram of two flow channels coupled in parallel (a) and in sequence (b) and (c),

35

Fig. 10 illustrates the principle of introducing a pre-treatment facility in the member comprising the micro flow system, here further combined with a post-treatment facility or a hydrodynamic separation facility,

Fig. 11 shows a flow channel for magnetophoresis,

Fig. 12 shows a flow channel having a serial array of assay sites equipped with electrodes to immobilise probes,

Fig. 13 shows a flow channel having a serial array of assay sites equipped with magnets to
5 immobilise probes,

Fig. 14 shows a flow channel having a two-dimensional array of assay sites equipped with magnets to immobilise probes,

10 Fig. 15(a) and (b) shows two devices each comprising a parallel array of micro flow channels each of which contains an assay site,

Fig. 16 illustrates the preparation of a micro flow system,

15 Fig. 17 shows diagrams from the magnetic separation described in Example 3, and

Fig. 18 is a flow chart illustrating a process for separating fetal cells from a maternal blood sample by combining different separation methods as described in Example 4.

20 DETAILED DESCRIPTION OF THE DRAWINGS

According to a preferred embodiment of the invention, magnetically stained particles, e.g. cells labelled immunologically with magnetic particles, such as antibody-coupled magnetic beads, are separated from non-magnetic particles, i.e. non-labelled cells, by exposing the particles to a
25 magnetic field generated with a permanent or an electromagnet. Positive or negative selection methods may be employed. By positive cell separation, cells of a specific cell type are separated and isolated from a heterogeneous mixture of cells.

Fig. 1 illustrates the principle of the separation method according to the invention. A micro flow
30 system 1 is shown having three inlet and two outlet ports. The sample 9 containing particles enters the separation flow channel 5 through a central inlet port 2 and is continuously guided through the separation flow channel 5 of the micro flow system 1 by two guiding buffers 10 and 11, each of which enters the separation flow channel through inlet ports 3 and 4, respectively. A field generating means comprising a magnet 8 is located adjacent to the flow channel 5 and
35 generates a magnetic field across the flow channel 5. When the sample 9 containing particles passes the magnetic field, magnetically stained particles 12 are drawn into the guiding buffer 10 and leave the flow channel 5 together with the guiding buffer 10 through the sort outlet 6 while

non-labelled cells 13 which are not influenced by the magnetic force remain in the fluid 9 leaving the flow channel 5 through the waste outlet 7.

Due to the small channel dimensions, the flow is laminar with negligible influence of inertial forces. Mixing of the sample flow and the guiding buffers is not detectable since the contact area is small and the contact time is reduced to a subsecond range. The thickness of the sample flow can be precisely adjusted by variation of the flow rate of the two guiding buffers. This enables the adjustment and optimisation of the magnetic micro flow system for various cell types and sizes. The volume flow of the sample and the two guiding buffers are adjusted so that the particles in the sample are lined up into a single stream of particles.

The magnetic field in the micro flow channel operates as an extremely sensitive filter for magnetic particles, e.g. cells. Cells labelled with superparamagnetic beads (e.g. MACS, Dynal) are magnetised and attracted by the magnetic field whereby the flow of magnetised particles is deflected into the sort outlet. The short residence time of the fluids in the flow channel and the low Reynolds numbers of the flow in the flow channel minimise the influence of gravity compared to the influence of the magnetic force.

Fig. 2 shows a cross-sectional view of two variants of the micro flow system 1 manufactured utilising semiconductor technology. The micro flow system may be manufactured in any suitable material such as polymers, glass, semiconductors, such as silicium, germanium, gallium arsenate, etc., etc.

The first micro flow system (a) shown is a 3-layer sandwich. The central layer 14 is a silicon wafer having a flow channel 5 etched into it. The silicon wafer 14 is covered with a transparent plate 15, such as a glass plate, having a thickness of, e.g., 0.16 mm. Fluids inside the flow channel 5 may be observed through the glass plate 15, e.g. utilising a microscope 16 (detection means). The fluid inlet 2 and outlet 7 are connected to tubings 17, 18, e.g. fused silica capillary or Teflon tubings, for entering fluids into or discharging fluids from the flow channel 5. Buffer inlets 3 and 4 and the outlet 6 for the separated particles are not shown. The bottom plate 19, e.g. made of plastic, facilitates mounting of the tubings 17, 18.

A modified version (b) of the micro channel system for separation was designed with gravitation as the force field, thus sorting particles due to their density and/or diffusion constant, the latter mainly being controlled by the shape and size of the particles. The system is during operation positioned with the flow plane substantially perpendicular to the direction of the force of gravity. As illustrated in Fig. 2(b), this embodiment of a micro flow system 1 has a sample inlet port 2 and an outlet port 7 located above the micro channel 5 and a buffer inlet port 3 and an outlet port 6

located below the micro channel 5. The sample containing particles 9 enters the separation flow channel through inlet port 2, and a guiding buffer 10 enters the separation flow channel 5 through inlet port 3. In this way, two laminated layers of fluid extending along the horizontal plane are created continuously flowing through the separation flow channel 5 of the micro flow system 1. Particles move from the particle containing layer to the guiding buffer layer by sedimentation. When the sample containing particles 9 passes the flow channel 5, particles with certain density and size properties are drawn into the guiding buffer 10 by the gravitational force and leave the flow channel 5 together with the guiding buffer 10 through the outlet port 6 while particles which are less susceptible to the gravitational field remain in the sample 9 leaving the flow channel 5 through the waste outlet 7. The vertical displacement of a specific particle in the sample is given by its density and diffusion constant and the contact time of the sample layer with the guiding buffer layer. The contact time is defined by the total flow rate of the fluids passing through the micro systems 1 and the length of the micro channel 5. The system can be adjusted such that a desirable or appropriate specimen can be withdrawn and separated from the sample flow due to their density and/or diffusion properties by adjusting the volumetric flow rates of the guiding buffer and particle containing sample.

Alternatively, the micro flow system may comprise two further inlet ports for entering a second and a third guiding buffer into the micro channel 5, where the two further inlet ports are positioned above the micro channel, one on each side of the sample inlet port 2. The flow rates of the sample and the second and third guiding buffers may be adjusted so that the particles contained in the sample are lined up in a single line.

Characteristic features of an exemplary embodiment of a micro flow system according to the invention, e.g. as shown in Figs. 1 and 2, is shown in Table 1.

Table 1 Characteristics, micro flow system

30	<u>Manufacturing method</u>	Material: Silicium Oxide, SiO ₂
		Photo-lithography
		Wet-chemical etching
35	<u>Flow Channel</u>	
	Cross sectional area	0.1 - 0.55 mm width x 0.04 - 0.2 mm depth
	Length	1.0 - 200 mm
	Total flow rate [μ l/min]	1 - 200
	Flow velocity [mm/min]	15 - 180
	Reynolds number	0.1 - 20
	Separation time	0.1 sec - 6.0 sec [2 μ l/min]

Magnet

Permanent Magnet

Rare Earth Samarium-Germanium 0.5 x 0.5 x 0.2 mm

Electromagnet

5 Holding Magnet 25 mm 12 V D.C. RS

Fig. 3 shows a micro flow system 1 utilising electrodes 20, 21 to generate an electric field across the flow channel 5. The electrodes 20, 21 may introduce dielectrophoretic or electrophoretic forces
10 utilised for particle separation. For electrophoretic separation to take place, gold electrodes may be positioned at the inside of the walls of the flow channel 5. By applying a voltage across the electrodes, an electrical field is generated substantially perpendicular to a longitudinal axis of the flow channel. The electrical field cause deflection of charged particles or molecules in the flow channel 5 whereby electrically charged particles can be deflected away from the sample
15 containing particles flowing in the micro flow channel and into a guiding buffer also flowing in the flow channel and abutting the sample containing particles in the micro flow channel.

Fig. 4 shows a micro flow apparatus 22 including a micro flow system 1 as shown in Figs. 1 and 2. The micro flow system 1 has two inlets 2, 3 and two outlets 6,7, two syringe pumps 23, 24, two 3-
20 way control valves 25,26 and capillary tubings 27, 28. The capillary tubings 27, 28 are used for interconnecting the two syringe pumps 23, 24 with the inlets 3, 2, respectively, of the micro flow system 1.

Conventional syringe pumps with means, e.g. stepping-motors (not shown), to move the pistons at
25 a predetermined speed have been utilised for generating a continuous flow of the guiding buffer through the inlet tube 27 and a continuous flow of the sample through the inlet tube 28. The system can be operated in a first loading mode where the two 3-way control valves 25, 26 open for flow between the syringe pumps 23, 24 and the buffer reservoir 29 and the sample reservoir 30, respectively, and the syringe pumps 23, 24 are loaded with buffer and sample from the reservoirs
30 29, 30, respectively. In a consecutive second operational mode the two 3-way valves 25, 26 open for flow between the syringe pumps 23, 24 and the capillary tubing 27 to the buffer inlet 3 and the capillary tubing 28 to the sample inlet 2 of the micro flow system 1, respectively. The syringe pumps are in this second operational mode controlled to generate a predetermined volumetric flow rate through the micro flow system 1.

35

Fig. 5 illustrates various micro flow systems 31, 32, 33, 34, 35, and 36 having flow channels of different geometries, illustrating different embodiments of the invention. Micro flow systems with two or three inlet ports and two, three or five outlet ports, respectively, are shown in Figs. 5(a)-

(d). The system shown in 5(a) with inlet ports for sample and two guiding buffers, respectively, and sort outlet port and waste outlet port is similar to the system shown in Fig. 1. Figs. 5(b) and (c) show systems with multiple outlet ports, three and five, respectively, whereto particles can be sorted and leave the flow channel through according to their susceptibility to the applied field. A simple system with two inlet and two outlet ports are shown in Fig. 5(d) similar to the one in Fig. 2(b) that is used for gravitational sorting. A micro flow system with a separation channel equipped with a magnet where the width of the separation channel is enlarged before the bifurcation in a sort outlet and a waste outlet is shown in Fig. 5(e). According to the behaviour of liquids in a flow channel, the size of the cross-sectional area occupied by the sample flow is proportional to the width of the separation channel. According to this, the transversal distance between two particles A and B is increased proportional to the increase of the width of the separation channel. A larger distance between particles, which are to be separated, yields a higher selectivity of the mechanical separation. Fig. 5(f) shows a micro flow system where the width of the outlet channel 6 is increased to form a chamber where the sorted particles are collected for further processing or analysis, e.g. detection, staining, destaining or cultivation.

Fig. 6 illustrates a system in which particles are entrapped inside the micro flow channel 5 for a desired period using the electromagnet-equipped apparatus. In this case, the magnetic field is adjusted so that magnetic particles 12 are drawn to the inner wall of the micro flow channel 5 close to the electromagnet 8. Upon removal of the current to the electromagnet 8 the particles 12 are redispersed and are rapidly moved to the sorting outlet port 6. This 2-step sorting procedure is an alternative to the continuous sorting procedure that is particularly useful in sorting of extremely rare events where dilution of the sorted cell fraction could be a problem. The sorting outlet port 6 may be closed when the current to the electromagnet 8 is turned on and is open when the current to the electromagnet 8 is turned off. The figure shows magnetic particles 12 in the process of being withdrawn from a continuous sample flow 9. The magnetic particles 12 are attracted by the magnetic field and withdrawn from the sample flow 9 by precipitation at the inner wall of the micro flow channel 5 proximate to the electromagnet 8. When the current supplied to the electromagnet 8 is turned off, the magnetic particles 12 are released into the flow again. The separation flow channel may not have a sort outlet, instead a buffer may enter the micro flow channel 5 after the sample and the entrapped particles may be released by removing the current supplied to the electromagnet 8.

Fig. 7 illustrates another embodiment of the present invention for separation of particles fulfilling certain criteria from the sample 9 by hydrodynamic force. The apparatus comprises a 2-way valve 40 and a micro flow system having a separation flow channel 5 with three inlets 2, 3, 4, two outlets 6, 7 and a collecting chamber 37. The sample 9 containing particles enters the separation flow channel 5 through a central inlet port 2 and is continuously guided through the separation

flow channel 5 of the micro flow system by two guiding buffers 10 and 11, each of which enters the separation flow channel 5 through inlet ports 3 and 4, correspondingly. The sample 9 is monitored utilising a microscope objective 16. The apparatus has control means 38 for controlling the two-way valve 40. The control means comprises monitoring means having an optical detection means, e.g. a photomultiplier system (PMT), a CCD camera/chip or a photo diode, optically connected to the microscope objective 16. The objective 16 is focused on the measuring volume, which is located inside the flow channel 5. The size of the measuring volume is defined by a pinhole or slit 39 positioned in front of the optical detector and by the magnification of the objective 16. The 2-way valve 40, e.g. a piezoelectric drop-on-demand ink-jet printing valve, is connecting the collecting chamber 37 to the sort outlet 6. The flow restriction of the waste outlet channel 7 is much higher than the flow restriction of the sort outlet channel. This can be achieved by attaching a flow restrictor (not shown) to the waste outlet channel 7. Thus, if the 2-way valve 40 is open the sample 9 containing particles is deflected towards the sort outlet 6. The collecting chamber 37 is used to collect and capture the sorted particles for post-analysis. Other particles continue to flow out through the waste outlet 7.

Particles are physically separated using hydrodynamic forces according to optical measurements on each particle. The photomultiplier (PMT) signal generated when a particle resides in the measuring volume is transmitted to a pulse-height analyser also comprised within the control means 38. A selection circuit provides an activating signal whenever a specific particle exhibits photometric properties of a predetermined type. If the PMT signal for a specific particle indicates that the particle is of a specific type an actuation pulse is produced. The valve 40 opens at the actuation pulse, causing the liquid containing the specific particle to flow through the sort outlet 6 and to be captured inside the collecting chamber 37. The duration of the actuation pulse is made sufficiently long for the desired particle to be transported into the collecting chamber 37. For light excitation several sources can be used, e.g. laser, tungsten lamp, photo diode. For bundling of the light, a fibre optic cable, a photo lens, an objective or a light microscope can be used. Various optical detection methods, e.g. fluorescence, absorbency, can be used.

The micro flow system may be positioned on a movable table so that the micro flow system may be moved into selected positions relative to the microscope whereby an appropriate volume of the micro flow channel may be moved into the measurement volume of the apparatus.

During or after sorting, the captured sample can be analysed again, using e.g. a microscope. When the valve 40 is closed, particles are entrapped inside the collecting chamber 37 and can be observed for a desired period. A desired liquid or reagent for washing, cultivation or staining of particles or cells may be entered into the collecting chamber 37. After the separation process, the

particles may be withdrawn by flushing the collecting chamber 37 with an appropriate buffer entering the micro flow system through one of the inlets 2, 3, 4.

The sorting apparatus was designed to achieve a minimal dilution of the separated sample fraction. Hydrodynamic separation of particles can be performed due to the optical, electrical, magnetic and/or other properties of the particle-containing sample.

An example of an optical and mechanical arrangement of the apparatus based on fluorescence detection is illustrated schematically in Fig. 7. The sample 9, e.g. particle suspension, is guided through the separation channel 5 by two guiding buffers 10, 11 so that the particles contained in the sample 9 are lined up in a single stream flowing in a plane perpendicular to the optical axis of the objective 16. The flow is illuminated with a mercury arc lamp passing excitation filters for e.g. fluorescein measurement. A dichroic mirror reflects the excitation light to the sorting chip via e.g. a 20x microscope objective 16. The fluorescence light emission is collected by the same objective 16 passing a dichroic mirror. Behind the mirror, a slit 39 works as field stop limiting the detection area to a small stripe. Each particle passing the objective 16 is generating a short signal from the photomultiplier that is optically connected to the objective 16. The photomultiplier signal is amplified and transmitted to a peak detector.

The actuation frequency of the valve 40 used in this device is 1500 Hz which corresponds to a minimal actuation time of 0.6 msec.

Fig. 8 illustrates an alternative embodiment of the separation apparatus shown in Fig. 7 with a separation flow channel 5 having three inlets 2, 3, 4 and two outlets 6, 7. The sample containing particles enters the separation flow channel 5 through the centre inlet port 2 and two guiding buffers enters the channel 5 through the other two inlet ports 3, 4, respectively. Flow speed adjustment means comprising stepper motor driven syringe pumps 41, 42 are connected to the two outlet ports 6, 7, respectively. The syringe pumps 41, 42 suck the sample and buffer via inlet 2, 3 and 4, respectively, through the separation flow channel 5. The cells are monitored at the optical axis of the microscope objective 16 and flow to the separation junction. The guiding buffers and the sample containing unselected cells flow out into the waste outlet syringe pump 42. If a specific cell has optical properties causing an actuation pulse, the stepper motor of the pump 41 at the sort outlet is actuated and the stepper motor of the pump 42 at the waste outlet is stopped causing the liquids to flow to the sort outlet 6. The period the pump 41 at the sort outlet is switched on, respectively the pump 42 at the waste outlet is switched off is made sufficiently long to ensure that the desired cell has entered into the collecting chamber 37. When one of or both syringe pumps 41, 42 after some operation time need to be emptied, the 3-way valves 43, 44 are switched from their normal operation position where they open for flow from the separation flow

channel 5 to the syringe pumps 41, 42, respectively, into a position where the 3-way valves 43, 44 open for flow between the syringe pumps 41, 42 and a waste container (not shown) and where the stepper motors driving the syringe pumps 41, 42 are operated in the reverse direction of the normal operation direction to empty the syringe pumps 41, 42.

5

Fig. 9(a) shows two flow channels 45, 46 operating in parallel. The sample containing particles enters the flow channels 45, 46 through inlet ports 47, 48, respectively. The guiding buffer enters the flow channels through the inlet ports 49, 50, respectively. In the flow channels 45, 46, particles susceptible to the magnetic field generated by magnets 51, 52, respectively, are deflected from the sample containing particles into the corresponding guiding buffer and flow thereafter through the sort outlet 53. The remaining part of the sample leave the flow channels 45, 46 through the waste outlets 54, 55, respectively. Separation is increased by using a plurality of flow channels coupled in parallel.

10

15

Fig. 9(b) and (c) shows examples of combinations of micro flow systems for magnetic, hydrodynamic or gravitational separation. In Fig. 9(b), particles are first separated from a sample in a magnetic separation channel, where after the sorted particles are subjected to a hydrodynamic separation due to the optical properties of the particles. Thus, it is possible to analyse and separate particles from a sample based on both optical and magnetic properties of the particles or to another combination of properties or characteristics. In Fig. 9(c), two magnetic separation channels are coupled in series in order to obtain a highly purified product.

20

25

30

Fig. 10 illustrates examples of micro flow systems having means for automated labelling of particles with fluorescence or magnetic probes. The system may be combined with post-treatment means for removal of the probes or for other treatment of the sorted particles. The system contains a micro flow system containing channels 56, 57 for addition of liquids to the sample, e.g. reagents for cell lysis or staining, a channel 58 for incubation and cultivation or storage of the sample for further processing and a separation channel 5. A sample is introduced into the micro flow system via an inlet 2 and one or more reagents can be added continuously to the sample, which is transported into the incubation channel 58. A simple micro flow structure was constructed for sample pre-treatment. Preferably, the flow rates are managed by computer-controlled syringe pumps. The incubation period between mixing and analysis of the sample is given by the volumetric flow rate of the syringe pumps and the cross-sectional area and length of the incubation channel.

35

Fig. 11 shows a micro flow system for magnetic separation of macromolecules, i.e. ribonucleic acid or proteins from a sample. Magnetic beads labelled with a fluorescence dye and a probe, specific for i.e. DNA are added to the sample which is then incubated. This sample is entered via inlet

port 2 into the separation chamber 5 and the particles are drawn by the field generated by the magnet 8 along the separation channel 5 due to their mobility. After a defined period, the magnetic field is removed and the fluorescence banding can be observed under a microscope. By running standards of known size, it is possible to calibrate the system and to separate particles of e.g. DNA due to their size and shape, similar to electrophoresis.

Fig. 12(a) with details in Fig. 12(b) shows a serial sensor array. A micro flow channel 5 has a plurality of assay sites, each equipped with field generating means 59 that may be individually turned on and off. The flow channel 5 shown has rectangular electrodes 59 positioned in small grooves at the bottom wall of the flow channel 5. A voltage can be applied selectively to each electrode 59. Various probes, receptors, indicators, etc. may be attracted to and immobilised at selected electrodes 59 by applying a voltage to the selected electrodes 59 while a fluid containing the corresponding probes, receptors, indicators, etc. resides in the flow channel 5. Preparation of the multiple assay sites may be accomplished by sequentially loading each assay site with a specific probe. Voltage is applied to one or more specific electrodes in the micro flow channel 5, and a fluid containing a specific probe, reagent or indicator, etc. is entered into the micro flow channel 5 where the probes etc. will be attracted to the electrodes to 59 which the voltage is applied. Subsequently, the voltage is turned off. Then, a voltage is applied to the next electrode 59 and the next fluid containing a specific probe etc. is entered into the micro flow channel 5. Thus, various assay sites each containing a specific probe, reagent, or indicator can be created. Antibodies, fluorescence molecules, DNA, RNA and protein dyes are examples of probes.

As an alternative to the electrodes 59, magnetic force can be selectively applied to the assay sites with an array of electromagnets positioned at or near the surface of the micro flow channel 5 to immobilise probes etc. that have magnetic properties to desired assay sites. Alternatively, a photoactivation process can be used for covalent coupling of molecules or particles to the surface of the channel 5 at the assay site.

One example of a probe is DNA, which has an overall negative charge, drawn to the electrode 59 surface by a positive bias, another example is DNA-coated magnetic particles that are drawn to the surface of micro flow channel 5 by magnetic means.

By modification or coating of the surface of the micro flow 5 channel and/or the electrodes 59 or magnets, specific chemical and mechanical properties can be created. To increase the binding forces of the probe, the surface may be coated with a specific layer or matrix, e.g. a polymer such as urethane or a reactive chemical group. When the current to the selected electrode or electromagnet is switched off the probe remains on the surface e.g. by absorption. Thus, an encapsulation or immobilization of the molecule is achieved.

Thus, a field generated at selected assay sites across the flow channel 5 may be utilized for immobilization of particles, such as biomolecules, whereby these may be held in substantially fixed positions within the flow channel permanently or for a specific period of time allowing chemical reactions between the particles and an entered reagent to take place and/or kinetic measurements on the particles to be performed and/or the particles to be brought into contact with different chemical substances. For analysis of the reactions in the micro flow system, optical detection means, e.g. a microscope, may be used.

It is an important advantage of the device that a number of assays can be performed in a single device. During operation of the device, various processing steps, such as e.g. washing steps, and reagent addition, etc., may be performed.

Fig. 13 shows a micro flow device with a flow channel 5 and with a serial array of assay sites and permanent magnets 8 positioned on a separate cartridge 60. A second cartridge 61 has a flow channel 5 with an inlet 2 and an outlet 7. The cartridge 60 carrying the magnets 8 can be positioned exactly below the second cartridge 61 so the magnets 8 are accurately positioned below the assay sites in the flow channel 5 as shown in the figure below cartridge 61.

Probes to be immobilised at a specific assay site utilising a magnetic field, as described in Fig. 12 or Fig. 13, may be positioned at the desired assay site by a method comprising the steps of positioning a defined volume of the liquid containing the magnetic probe or reagent using e.g. inkjet based dispenser technology, within a specific volume of the flow channel 5 right over one of the permanent magnets 8 for immobilization of the magnetic probe or reagent in an assay site at the surface of the flow channel 5. The method may be repeated for various probes to be immobilised at various assay sites, respectively. After the immobilization, the cartridge 61 containing the flow channel 5 is covered by a transparent cartridge 15, e.g. a glass plate, allowing the assay site array with the probes inside the micro flow channel 5 to be observed. An analysis with the assay site array is performed by introducing a sample through inlet 2 into the micro flow channel 5 where it passes the array of assay sites and leaves the micro flow channel 5 through outlet 7. An objective 16, optically connected to an optical detector, e.g. a fluorescence microscope, may be focused on the array in the micro flow channel 5 to monitor the chemical reactions at the assay sites.

Fig. 14 shows another embodiment of the invention comprising a cartridge 62 with a micro flow channel containing assay sites 63 arranged in a two-dimensional array, a cartridge 64 with permanent magnets 8 and a transparent cartridge (not shown) to cover the cartridge 62 with the micro flow channel. The assay sites 63 are formed as small grooves at the surface of the bottom

wall of the micro flow channel. The dimensions of the cartridges 62, 64 and the position of the assay sites 63 and the magnets 8 are the same, so if cartridge 62 is placed over cartridge 64 as shown in Fig. 14(b), the magnets 8 are located under the assay sites 63.

5 The embodiments shown in Fig. 12, 13 and 14 may be utilised for hybridisation of DNA as described below. A magnetic carrier including a DNA probe may be immobilised at a specific assay site as described previously. In this way, an array of assay sites is created in a micro flow channel wherein each assay site contains a different DNA probe. Thereafter, a sample containing target molecules is entered into the micro flow channel preferably until the sample has filled the
10 micro flow channel. After the target molecule has been hybridised to a DNA of a specific assay site, a solution of reporter probes, e.g. fluorescence probes, is entered into the flow channel where it binds on the assay site carrying the hybridised DNA. By using a fluorescence detector, e.g. a photomultiplier, focused on the different assay sites the reaction at each assay site can be monitored. By removing the magnetic field on a specific assay site the magnetic material
15 including the DNA probe can be removed, so the process can be reversed. Thus a renewable array of assay sites can be created and wash processes can be implemented in the operation of the array of assay sites.

Fig. 15(a) shows a device according to the invention for performing a multiple assay analysis in a
20 micro flow system by using a parallel array of assay sites. The system comprises an array of parallel micro flow channels 65 each of which contains one assay site with a specific probe immobilised using e.g. an electrical or magnetic field or by photoactivation as described previously. For example, a cartridge containing a permanent magnet (not shown) can be positioned below the parallel micro flow channels 65 in whereby magnetic probes can be
25 immobilized in the micro flow system using dispensing technology. In this way, a plurality of assay sites may be created in the parallel flow channel 65 array allowing a simultaneous analysis of a sample with a plurality of probes or reagents defined by the number of parallel micro flow channels 65.

30 The micro flow system consists of two parallel flow channels 66, 67 which are connected via a number of parallel micro flow channels 65 each containing an assay site. An injection flow channel 66 has an inlet 2 and is connected to an outlet 68 via a blocking valve 69, and the waste flow channel 67 is connected to a waste outlet 70 via a blocking valve 71. By blocking one of the two outlets 68, 70 with the blocking valves 69, 71, respectively, it is possible to guide the injected
35 flow through the array of channels 65 containing assay sites or through the injection channel outlet 68, respectively. The flow through all channels 65 containing assay sites is merged into the waste channel 67 and is leaving the system via the waste outlet 70. During passage of the

channels 65 containing the assay sites, the sample comes into contact with sensing probes, which are immobilized at the assay sites. Chemical reactions may be detected as described for Fig. 12.

In Fig. 15(b) an alternative embodiment of an array of parallel channels 65 containing assay sites is shown. The micro flow system has three inlet ports 2, 3, 4 to enter different liquids into the micro flow system. By connecting outlet port 68 to a flow restrictor, only one blocking valve 71 is needed to operate the system. If the blocking valve 71 between the channel array 65 and the waste outlet 70 is closed, the channel array 65 is blocked and the flow from inlet 2, 3, 4 will pass the injection channel 66 and leave the micro flow system via outlet 68. When the blocking valve 71 is open, the liquid introduced in the injection channel 66 will flow into the sensor channel array 65 because of the higher flow restriction at outlet 68 compared to waste outlet 70.

Fig. 16 shows a micro flow system manufactured as a 3-layer sandwich. The central layer is a silicon wafer having a flow channel etched into it. The silicon wafer is covered with a transparent plate, such as a glass plate, having a thickness of, e.g., 0.16 mm. Fluids inside the flow channel may be monitored through the glass plate, e.g. utilising a microscope or other optical detection means. The fluid inlet and outlet are connected to tubings, e.g. fused silica capillary or Teflon tubings, for entering fluids into or discharging fluids from the flow channel. Buffer inlets and the outlet for the sorted particles are not shown. The bottom plate, e.g. made of plastic, facilitates mounting of the tubings.

Figs. 16(1) to (5) illustrates the following description of the manufacturing and preparation of a micro flow system. A separation flow channel was designed to fit into a system comprising a bonded silicon/glass sandwich. The micro channels were etched into a silicon wafer covered with a boron glass plate having a thickness of 0.2 mm allowing monitoring of the micro channels, using i.e. a microscope. The separation flow channel was fabricated on a 4", 350 μ m, <100> silicon wafer. A 1.5 μ m layer of SiO₂ was applied to the surface of the silicon wafer and was patterned with a mask containing the channel layout. A 2.6 μ m layer of photoresist was spun on top of the SiO₂ and patterned with a mask defining intermediate holes. The two-step mask consisting of a SiO₂ mask and a photoresist mask was used for etching a two level structure with vertical walls by reactive ion etching (RIE) in a SF₆:O₂ plasma. The holes were initially etched to a depth of 22 μ m and then etched deeper together with the channels, which were etched to depths in the range from 40 μ m to 100 μ m. A layer of 1.8 μ m SiO₂ was patterned with a mask for inlets and outlets on the back of the silicon wafer. The etching was carried out in KOH at 80°C and was stopped when all the intermediate holes were clearly visible from the back. Finally, a glass wafer was anodically bonded to the silicon wafer. The micro channels were designed for volumetric flow rates of 0.1 to 200 μ l/min with a mean flow speed of maximum 100 (mm/min).

The separation flow channel may be provided with one or two permanent or electromagnets in three different ways:

- (a) Rare earth Samarium-Cobalt block magnets of 1.0 x 1.0 x 0.5 mm (Goudsmit, Netherlands) may be glued with silicon rubber into the opening slot of the separation flow channel.
- 5 (b) Rare earth (Sr) magnetic powder (Tropag, Hamburg, Germany) can be mixed with epoxy 1:1 (v/v) and this magnetic paste may be glued into the opening slot of the separation flow channel yielding a thick film magnetic layer of 1.0 x 1.0 x 0.5 mm.
- (c) Ferrite steel wool may be glued with silicon rubber into the opening slot of the separation flow channel. A high magnetic field gradient can then be induced inside the opening slots by applying
10 an external magnetic field, e.g. by an electromagnet (Goudsmit, Netherlands) positioned proximate to the separation flow channel.

EXAMPLE 1

- 15 A micro flow system with a layout as sketched in Fig. 5(d) with two inlets and two outlets has been tested utilising it for separation of various magnetisable particles. The test conditions are listed below.

	Particle concentration	10 ⁷ particles/ml
20	Total flow rate	25 µl/min
	Length flow chip	3.5 mm
	Channel width	250 µm
	Channel depth	60 µm
	Separation time	2.4 sec
25	Desired particle deflection:	10 µm

The separation efficiency (enrichment rate) E and depletion rate 1/E are defined by

$$E = \frac{\frac{\% \text{ positive particles after separation}}{\% \text{ negative particles after separation}}}{\frac{\% \text{ positive particles before separation}}{\% \text{ negative particles before separation}}}$$

- 30 For separation of various paramagnetic standard beads of different sizes and paramagnetic field strength, the results are shown in the Table 2.

Table 2 Separation efficiencies

Paramagnetic Bead	Size	Separation Efficiency [%] ¹			
	μm	A)	B)	C)	
<hr/>					
5	Polysciences				
	25 % iron-oxide	1-10	>99	>99	95
	50 % iron-oxide	1-10	>99	>99	96.5
10	Paesel + Lorei				
	Magnetic Affinity	0.5-1.5	>99	>99	97.5
	Boehringer				
	Streptavidin Magnetic	1	90.5	88.7	89.5
	Dynal				
15	Magnetic Mass Dyal M-450	1-10	98.0	>99	96.5

¹ total flow rates: A)= 10 $\mu\text{l}/\text{min}$, B)= 50 $\mu\text{l}/\text{min}$, C)= 100 $\mu\text{l}/\text{min}$

EXAMPLE 2.

Further, the micro flow system used in Example 1 has also been tested by utilising it for separation of Human T-lymphocytes (JURKAT cells). Magnetically stained and unstained JURKAT cells were used to form a heterogeneous cell sample. For magnetic staining of the cells, a CD4-magnetic surface marker from Miltenyi Biotech was used. JURKAT cells were suspended in 1% PBS/BSA to a concentration of $10^7/\text{ml}$. Biotin-conjugated CD4 magnetic microbeads were added at 2 μl stock/ 10^7 cells following the manufacturer instruction.

The magnetically stained cells (10^7 cells/ml) flowed through the microchip for 10 min. and fluids were collected at the two outlets. Three experiments at different flow rates (5, 25, 50 $\mu\text{l}/\text{min}$) were performed. The same experiments were performed using magnetically unstained cells.

An aliquot of the collected samples was analysed under a microscope and the particles were counted using a Neubauer microscopy chamber. For each experiment 1 μl sample was analysed:

Run	flow rate [μ l/min]	cells [%] at Sort outlet
5	Negative (unstained cells)	
	5	<0.1
	25	<0.1
	50	<0.1
	Control ¹	
10	5	n.n.
	25	n.n.
	50	n.n.
	Positive (stained cells)	
	5	95.5
15	25	92.8
	50	80.5
	Control ¹	
	5	n.n.
	25	n.n.
20	50	n.n.

¹ using the micro flow system without an integrated magnet

EXAMPLE 3

25

The system employed for separation of magnetisable particles from a sample is shown in Fig. 4. It comprises two syringe infusion pumps (Harvard Apparatus, Southnatic, Az) that provides constant flow rates of 0.1 to 100 μ l/min using a 0.5 ml micro syringe (Hamilton, Bonaduz, Switzerland), a separation flow channel of silicon for the separation of the magnetisable particles, and a collecting unit for collecting of the sorted particles. Two 3-way microvalves (Lee, Parameter AB, Sweden) were integrated into the apparatus for sterile solution handling. All components were interconnected with fused silica capillaries (340 μ m id., Supelco, U.S.A.). The SFC was placed under an inverted microscope (Axiovert 100, Zeiss, Germany) for visualisation of the separation procedure. All micro channels and tubing were deactivated by silanisation as described in Blankenstein, G. Scampavia L, Branebjerg J, Larsen UD, Ruzicka J (1996): Flow switch for analyte injection and cell/particle sorting in Analytical Methods and Instrumentation, μ TAS '96 conference, 17-22 November 1996, Basel. A FACScan with 488 nm argon laser excitation and collection of forward and side scatter and fluorescence of fluorescein were used (Becton Dickinson,

30

35

Mountain View, CA) for all experiments. Results were collected and analysed using the FACScan research software (Becton Dickinson).

Results on the use of a separation flow channel equipped with a permanent magnet optimised for Dynal beads are shown in Fig. 17. A bead suspension of $1-5 \times 10^8$ particles/ml containing a mixture of non labelled magnetic Dynal particles (d: $4.5 \mu\text{m}$, M-450) and fluorescence calibration beads (d: $3.2 \mu\text{m}$, Dako A/S, Glostrup, Denmark) have been separated. About 1 ml of the non-magnetic, non-deflected fraction was collected at the waste outlet and analysed by flow cytometry (B). To enumerate the positive and negative fractions, two windows were set for the statistic evaluation. Before separation, the sample contained 38.3 % fluorescence particles and 55.8 % magnetic particles, respectively (a). After sorting by the described system almost all magnetic particles were found in the sorted fraction collected from the sort outlet (b) and non-magnetic particles were found in the negative fraction (c) collected from the waste outlet, respectively. Under optimised conditions, an enrichment rate of 350 was achievable.

15

EXAMPLE 4

This example concerns enrichment of fetal cells in a sample for magnetic activated cell sorting. A combination of the embodiment of the invention as shown in Figs. 7 and 10 (upper), optical cytometry, and Figs. 4 and 10 (lower), magnetic cell separation, provides a powerful apparatus for efficient enrichment of fetal cells in a sample.

The process for increasing the concentration of fetal cell in maternal blood samples involves the following steps (see Fig. 18): (i) A first selection step for removal of the majority of the maternal blood cells based upon their volume, size and density; (ii) A second sorting step for isolation of the fetal blood cells from the remaining maternal blood cells based on immuno-fluorescent separation using a device as described in Fig. 7 and/or based on immuno-magnetic separation using a device as described in Fig. 4. In the examples shown in Fig. 9(b), the magnetic blood sample is first separated in a magnetic separation chamber, followed by a separation due to optical properties of the sample, or two magnetic separations are performed one after the other, see Fig. 9(c), in order to obtain a highly purified product.

An example of sorting of particles of very low concentration from a sample of maternal blood in a non-invasive prenatal screening test is presented in the following paragraph.

35

Nucleated red blood cells are found in maternal blood in a concentration of 10 to 1000 per ml of all nucleated cells. Bianchi has shown (D.W. Bianchi, Journal of Pediatrics, 1995, 127, 6, p. 847-856) that it is possible to use such cells for genetic screening in prenatal diagnosis. The cell surface

marker CD71+ for example, is an appropriate marker to select such cells from maternal blood. Test results demonstrates that magnetic activated cell sorting is powerful enrichment system for sorting and isolating fetal nucleated blood cells from maternal blood. For this the magnetic activated cell micro technology as described in this invention is used. Fetal cells are distinguished and separated from maternal blood by the use of a specific surface marker (CD71) which is only present on the cell membrane of fetal nucleated blood cells. By selectively attaching a magnetic antibody probe to CD71, a magnetic probe is attached substantially exclusively to fetal cells.

EXAMPLE 5

This example concerns depletion of magnetically labelled CD45 positive cells (maternal leukocytes) from a maternal blood sample spiked with cord blood. A flow chip described in Fig. 1 was used in a system as described in Fig. 4. In this experiment a 1:3 spike (fetal/maternal, v/v) was used to demonstrate the performance of the magnetic separation. Heparin was used as an anti-coagulant. The nucleated cells were labelled with CD45 coated magnetic 0.1 μ micro particles (Immunicon, U.S.A.), using a monoclonal antibody against CD45 as the first layer. The cell suspension was collected at both outlets 6 and 7 (see Fig. 1). For testing the sorting efficiency, parts of both the collected fractions were analysed on microscope slides. The results showed that most of the cells, more than 95%, collected at the sort outlet 6 were CD45 positive.

EXAMPLE 6

Fluorescence activated cell sorting using the device described in Fig. 7. First results have shown an enrichment factor of more than 300, which indicates that the employed device is a powerful tool for enrichment of rare cellular events.

EXAMPLE 7

An example is given for the embodiment of the invention as described in Fig. 12 for the use of multiple sensor array technology for sensing of a group of analytes in one step. For this purpose, the biosensing components such as antigens or antibodies can be loaded into a specific assay of the flow channel and immobilised there.

Magnetic particles carrying an antigen probe are immobilised on the surface of the micro flow channel by magnetic means. The immobilisation of each probe is exactly specified to a site by switching on a specific electro-magnet.

After loading the surface with different groups of antigen probes, the test solution is guided through the flow channel 5 of the microchip. If the sample contains an antibody, which is complementary to one of the different antibodies, it will bind to that specific site where this antibody is immobilised. In a third step, the sample solution has to be removed, and a liquid containing a secondary antibody against the FC region of the first antibody is guided through the micro flow channel. The secondary antibody is coupled to a fluorescence dye allowing the identification of a specific assay site where the antibodies have been bound. The device can be used for rapid screening of blood samples, e.g. for identification of bacteria or virus in blood samples having a micro flow channel with virus/bacteria specific antigen probes.

10

CLAIMS

1. A micro flow system for separating particles, comprising a member having
5 a flow channel defined therein for guiding a flow of a fluid containing the particles through the flow channel,
first inlet means positioned at one end of the flow channel for entering the fluid into the flow
10 channel,
first outlet means positioned at the other end of the flow channel for discharging the fluid from the flow channel,
15 the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross-section of the flow channel,
the member being positioned in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field
20 across the flow channel are deflected in the direction of the field.
2. A micro flow system according to claim 1, wherein the member further comprises field
generating means positioned proximate to the flow channel for generating a field substantially
perpendicular to a longitudinal axis of the flow channel.
- 25 3. A micro flow system according to claim 1 or 2, further comprising monitoring means positioned at the flow channel for monitoring parameters of a particle residing within a measurement volume within the flow channel and providing an output signal corresponding to a monitored parameter.
- 30 4. A micro flow system according to claim 3, wherein the monitoring means comprise optical detection means for monitoring optical parameters of a particle residing within a measurement volume within the flow channel and providing an output signal corresponding to an optical parameter.
- 35 5. A micro flow system according to claim 3 or 4, wherein the monitoring means comprise a Hall sensor for measurement of a magnetic parameter of a magnetic particle within a specific volume of the flow channel.

6. A micro flow system according to any of claims 3-5, further comprising field generating control means for controlling the strength of the field generated by the field generating means in response to the output signal of the monitoring means whereby particles are separated according to values of a parameter monitored by the monitoring means.
7. A micro flow system according to any of the preceding claims, wherein the Reynolds number of the flow of the fluid containing the particles through the channel is in the range of 0.01-500, preferably in the range of 0.05-50, in particular in the range of 0.1-25.
8. A micro flow system according to any of claims 1-6, wherein the lowest cross-sectional area of the flow channel is in the range of 0.004-0.11 mm².
9. A micro flow system according to any of the preceding claims, further comprising second outlet means for discharging particles having been deflected in the flow channel.
10. A micro flow system according to any of the preceding claims, wherein the field generating means comprises a magnet.
11. A micro flow system according to claim 10, wherein the field generating means further comprise ferrite members positioned at the flow channel for focussing of a magnetic field.
12. A micro flow system according to any of the preceding claims, wherein the field generating means comprises an electrode.
13. A micro flow system according to any of the preceding claims, wherein positions in relation to the flow channel of the field generating means are adjustable for adjustment of the strength of the field across the flow channel.
14. A micro flow system according to any of the preceding claims, further comprising flow speed adjustment means for adjustment of the time the particles reside in the flow channel.
15. A micro flow system according to any of the preceding claims, further comprising a cover for covering the flow channel.
16. A micro flow system according to claim 15, wherein the cover is a transparent or translucent cover allowing optical monitoring of the flow channel.

17. A micro flow system according to any of the preceding claims, further comprising second inlet means for entering a first guiding buffer, the cross-section and the path through the flow channel of the flow of the fluid containing particles being controlled by the first guiding buffer flow.
- 5 18. A micro flow system according to claim 17, further comprising third inlet means for entering a second guiding buffer, the cross-section and the path through the flow channel of the flow of the fluid containing particles being controlled by the first and second guiding buffer flows that surround the flow of the fluid containing particles.
- 10 19. A micro flow system according to claim 18, wherein the width and the position of the flow of fluid containing particles is controlled by adjustment of the volumetric ratio between the fluid flow rate and the flow rate of the guiding buffers.
- 15 20. A micro flow system according to any of the preceding claims, wherein the deflected particles comprise living cells.
21. A micro flow system according to any of the preceding claims, wherein the deflected particles comprise beads, microspheres, chromosomes, organelles, biomolecules, or proteins.
- 20 22. A micro flow system according to any of the preceding claims, wherein the deflected particles have been magnetically, chromophorically, or fluorescently stained.
23. A micro flow system according to any of the preceding claims, comprising a plurality of outlets for discharging of particles separated according to their different susceptibility to the field across
25 the flow channel.
24. A micro flow system according to any of the preceding claims, wherein the member further comprises pre-treatment and/or post-treatment facilities.
- 30 25. A micro flow system according to claim 24, wherein the pre-treatment facilities comprise incubation means for preparing or pre-reacting the fluid comprising the particles.
26. A micro flow system according to claim 24 or 25, wherein the pre-treatment facilities comprise means for magnetic, fluorescent, or chromophoric staining.
- 35 27. A micro flow system according to claim 24, wherein the post-treatment facilities comprise means for collecting or concentrating the deflected particles.

28. A micro flow system according to claim 24, wherein the post-treatment facilities comprise means for bringing the deflected particles into contact with one or more reagent(s).

29. A micro flow system for separating particles, comprising a member having

5

a flow channel defined therein for guiding a flow of a fluid containing the particles through the flow channel,

10

first inlet means positioned at one end of the flow channel for entering the fluid into the flow channel,

first and second outlet means positioned at the other end of the flow channel for discharging of fluid from the flow channel,

15

the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross-section of the flow channel,

20

monitoring means positioned at the flow channel for monitoring parameters of a particle residing within a measurement volume within the flow channel and providing an output signal corresponding to a monitored parameter,

25

control means for controlling passage of fluid through the first and the second outlet means, respectively, in response to the output signal of the monitoring means whereby particles may be separated according to values of a parameter monitored by the monitoring means.

30

30. A micro flow system for separating particles, comprising a member having

a flow channel defined therein for guiding a flow of a fluid containing the particles through the flow channel,

35

inlet means positioned at one end of the flow channel for entering the fluid into the flow channel,

field generating means positioned proximate to the other end of the flow channel for generating a field substantially along a longitudinal axis of the flow channel whereby the particles are drawn by the field along the channel and distributed according to their susceptibility to the field and their mobility.

31. A micro flow system for analysing components of a fluid, comprising a member having a flow channel defined therein for guiding a flow of a fluid through the flow channel, first inlet means for entering particles into the flow channel, first outlet means for discharging of fluid from the flow channel and a plurality of assay sites located in the flow channel and comprising immobilised reagents whereby the fluid may be analyzed for a plurality of components while residing in the flow channel.

32. A micro flow system according to claim 31, further comprising field generating means positioned proximate to at least some of the assay sites for generation of a field proximate to the corresponding assay site whereby reagents residing in the flow channel and being susceptible to the field when generated at a selected assay site are attracted to and immobilised at the selected assay site, or, are rejected from the selected assay site.

33. A micro flow system according to claim 31 or 32, wherein the member comprises a plurality of flow channels arranged in parallel or in series and each of which has assay sites whereby the fluid containing particles is brought into contact with a large number of assay sites.

34. A method of separating particles, comprising the steps of
guiding a flow of a fluid containing the particles through a flow channel in such a way that one particle at the time passes a cross-section of the flow channel,
positioning the flow channel in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field across the flow channel are deflected in the direction of the field and thereby separated from the fluid.

35. A method of separating fetal cells from maternal cells, comprising the steps of
selective magnetically staining of fetal cells in a fluid containing fetal and maternal cells,
guiding a flow of the fluid containing the fetal cells through a flow channel in such a way that one fetal cell at the time passes a cross-section of the flow channel,
positioning the flow channel in a magnetic field that is substantially perpendicular to a longitudinal axis of the flow channel so that magnetically stained fetal cells residing in the flow channel are deflected in the direction of the magnetic field.

36. A method of separating cancer cells from other cells, comprising the steps of
- selective magnetically staining of cancer cells in a fluid containing cancer and other cells,
- 5 guiding a flow of the fluid containing the cancer cells through a flow channel in such a way that one cancer cell at the time passes a cross-section of the flow channel,
- positioning the flow channel in a magnetic field that is substantially perpendicular to a longitudinal axis of the flow channel so that magnetically stained cancer cells residing in the flow
- 10 channel are deflected in the direction of the magnetic field.
37. A method of separating particles, comprising the steps of
- guiding a flow of a fluid containing the particles through a flow channel in such a way that one
- 15 particle at the time passes a cross-section of the flow channel, the flow channel having first and second outlet means for discharging of fluid from the flow channel,
- monitoring parameters of a particle residing within a measurement volume within the flow channel and
- 20 controlling passage of fluid through the first and the second outlet means, respectively, in response to a monitored parameter value whereby particles may be separated according to values of a monitored parameter.
- 25 38. A method of analysing components of a fluid, comprising the steps of entering a fluid containing the particles into a flow channel and allowing the fluid to flow in the channel, the channel having a plurality of assay sites, each of which comprises immobilised reagents whereby the fluid can be analyzed for a plurality of components while residing in the channel.
- 30 39. A method of forming assay sites comprising immobilised reagents in a flow channel, comprising the steps of
- preparing selected surfaces of the assay sites for immobilisation of selected reagents,
- 35 dispensing a selected reagent proximate to a corresponding selected assay site, and

generating a field proximate to the selected site whereby the reagent is attracted towards and brought into contact with the surface of the selected assay site by the field generated and is immobilised upon contact with the surface.

1/14

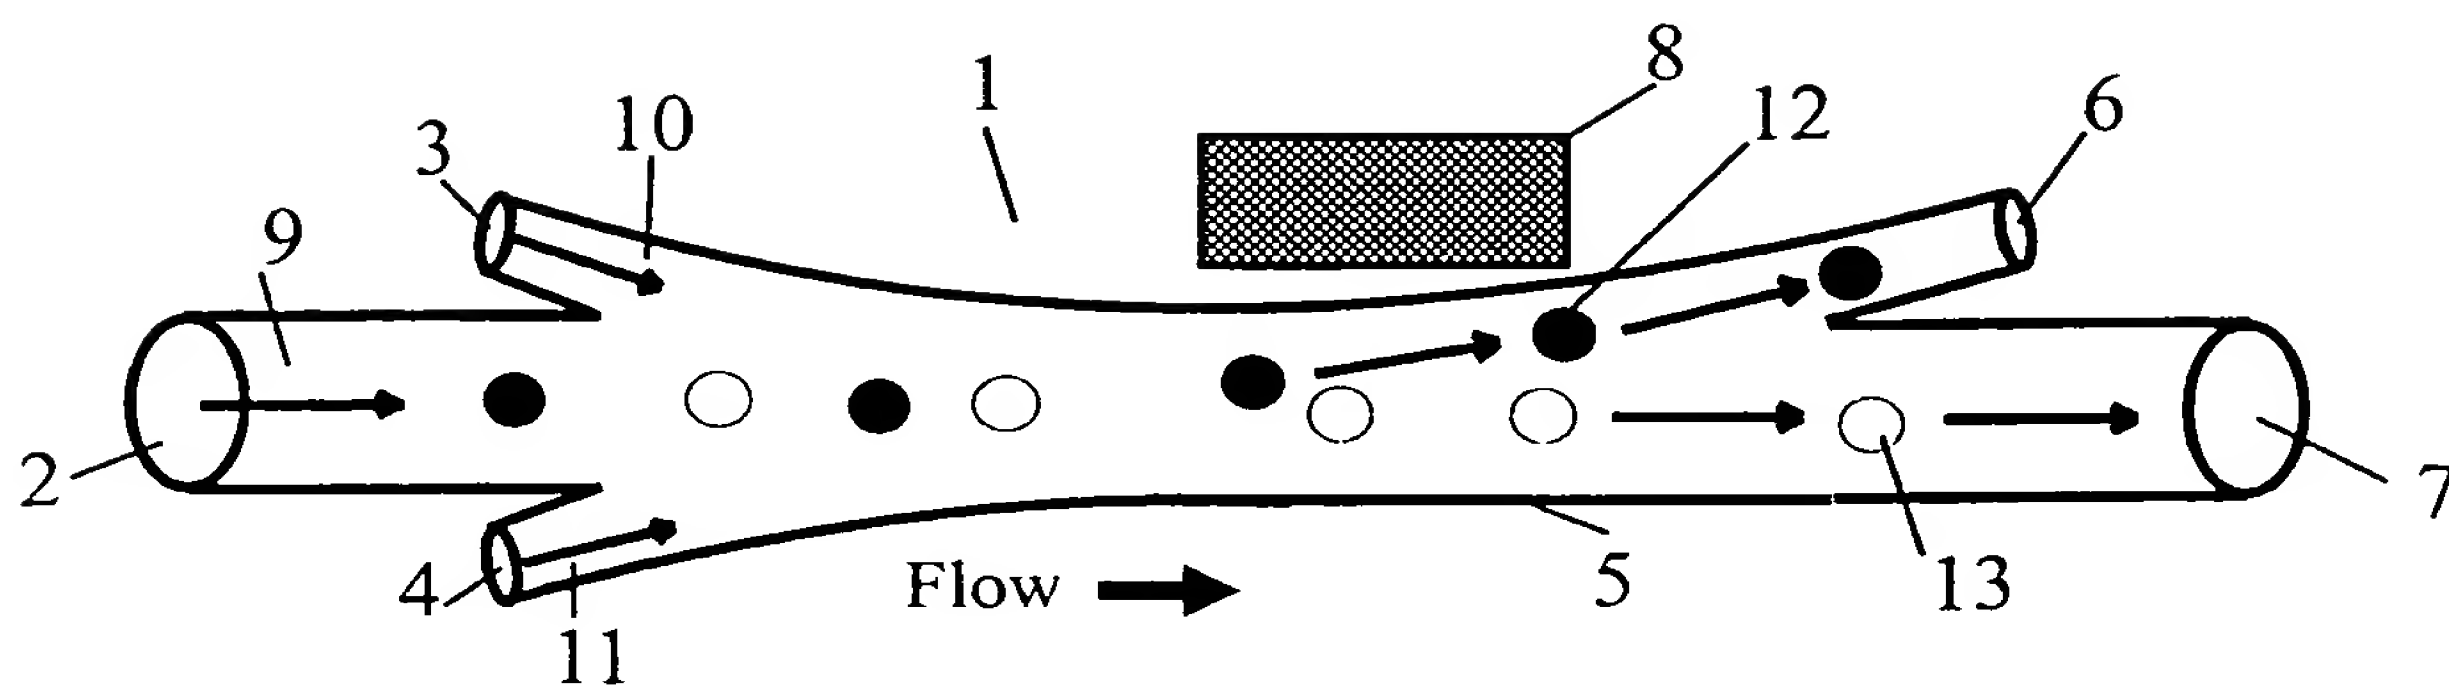


Fig. 1

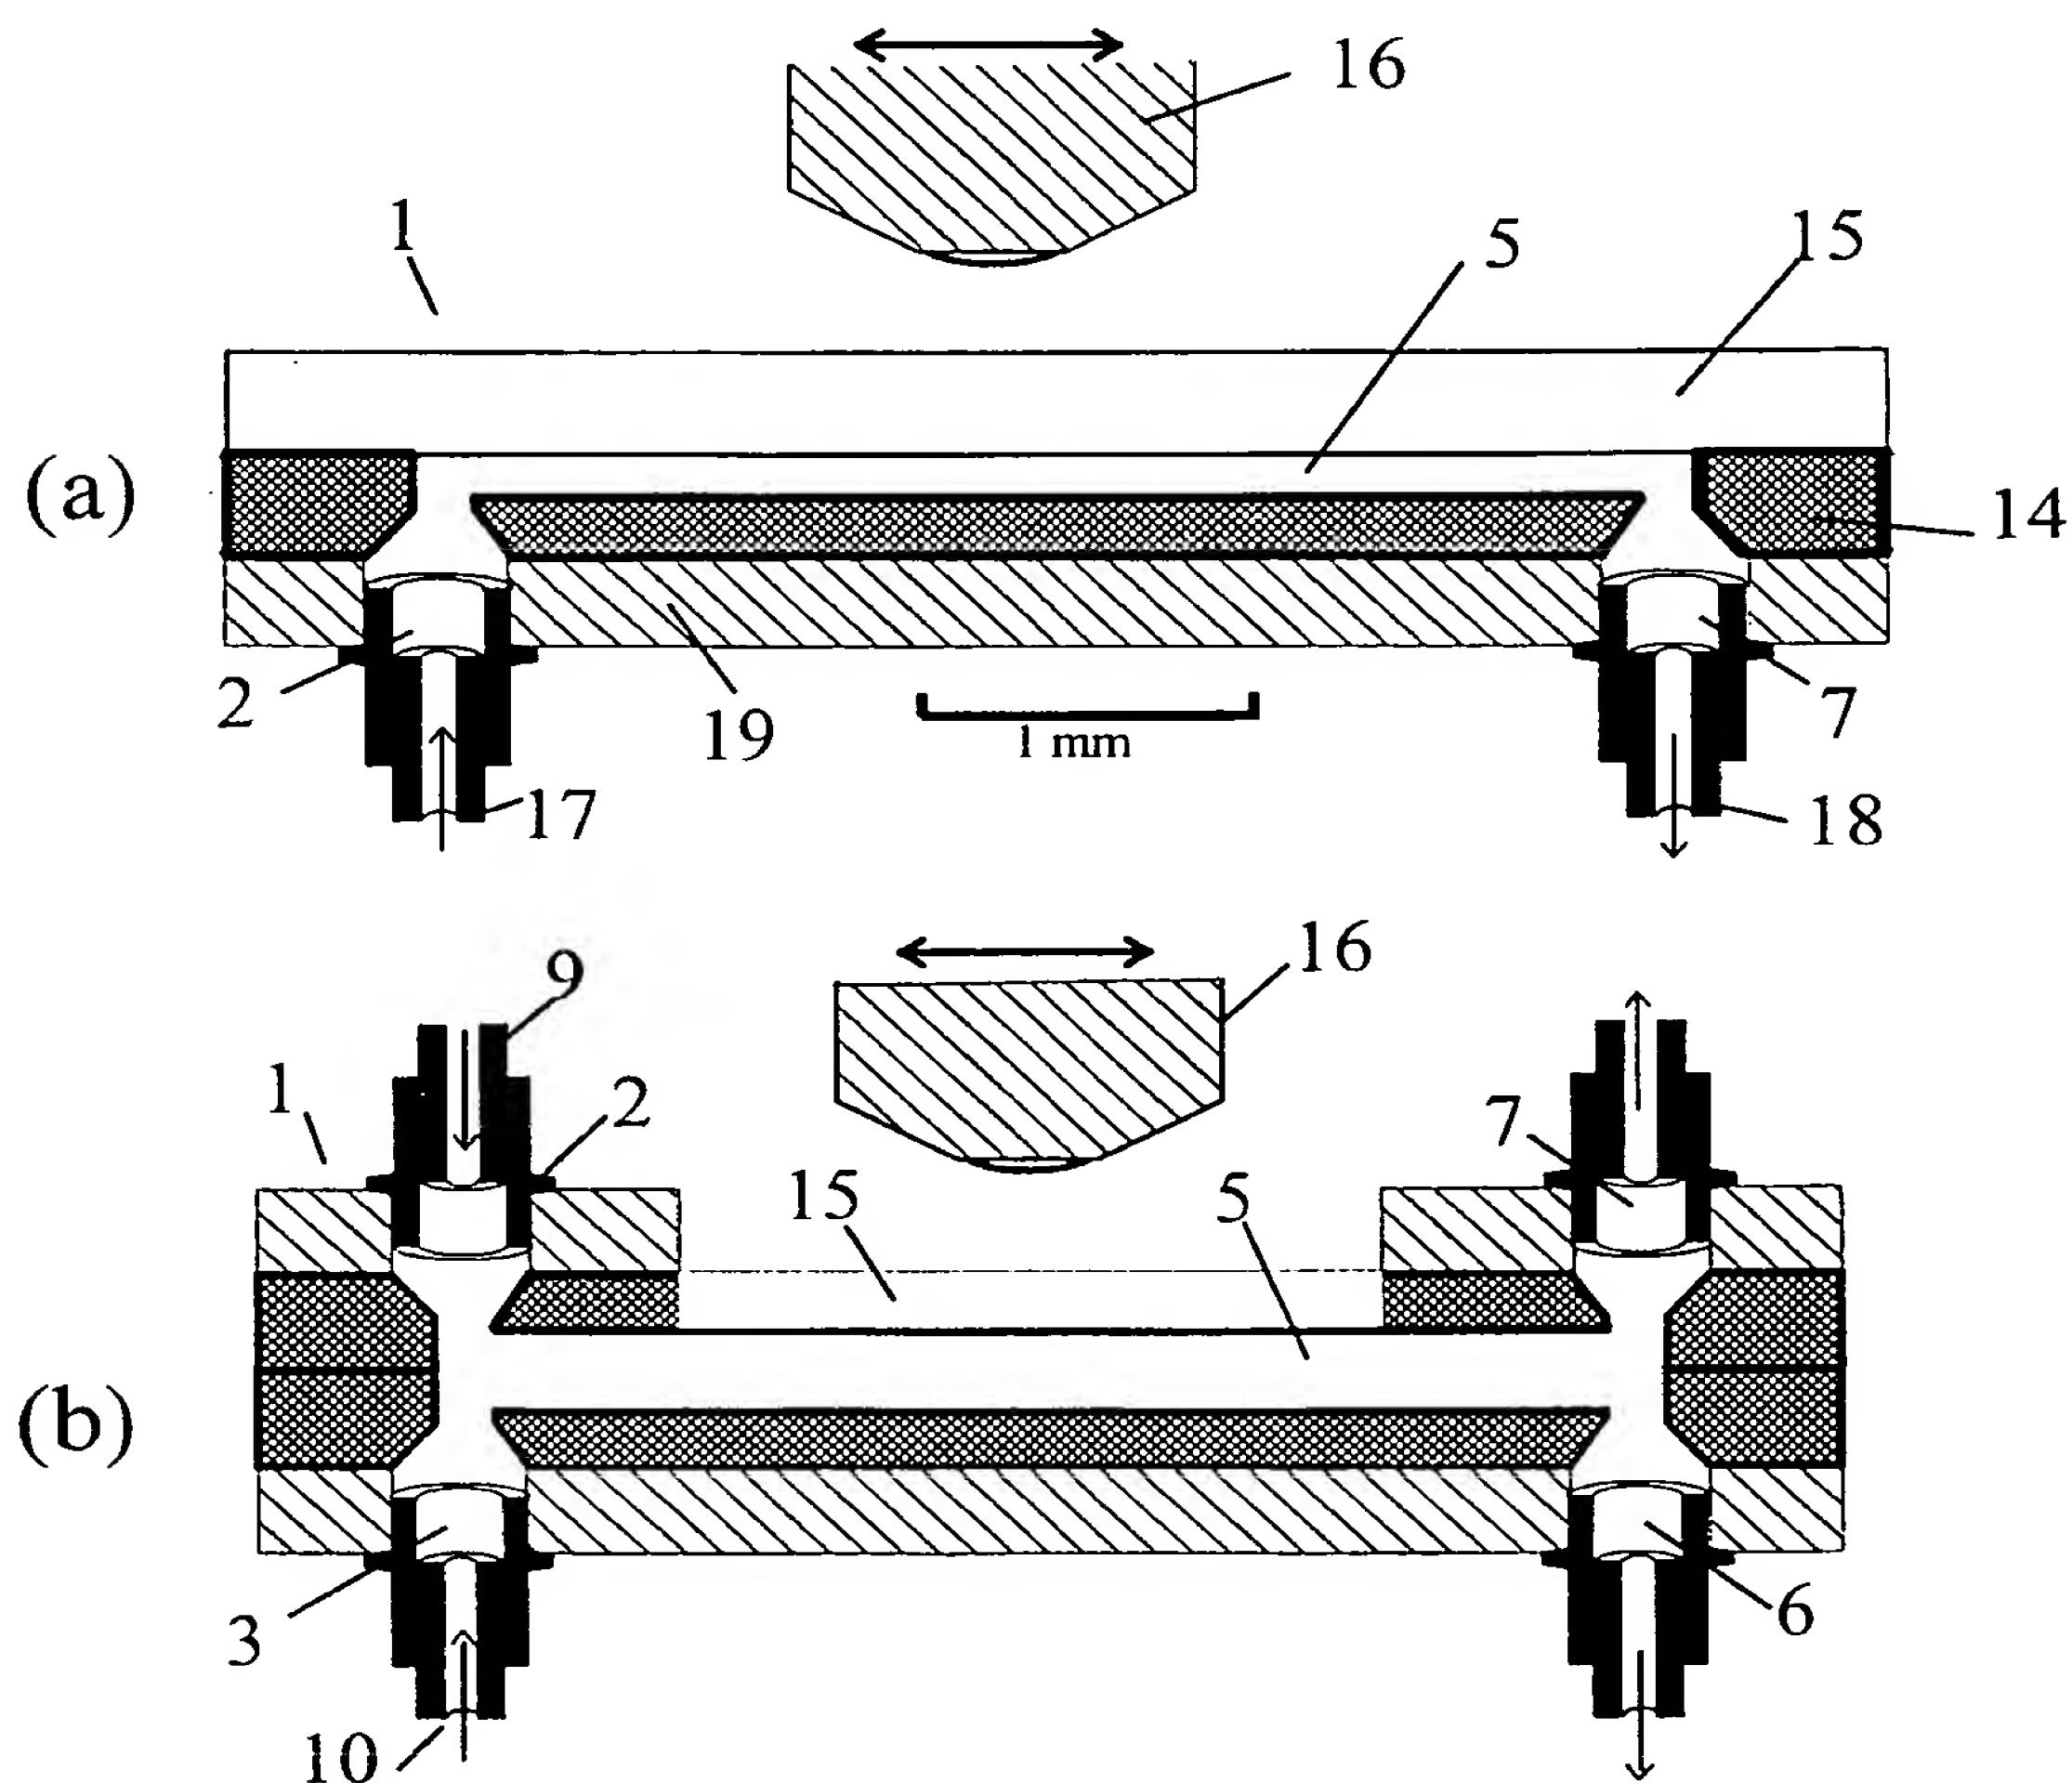


Fig. 2

2/14

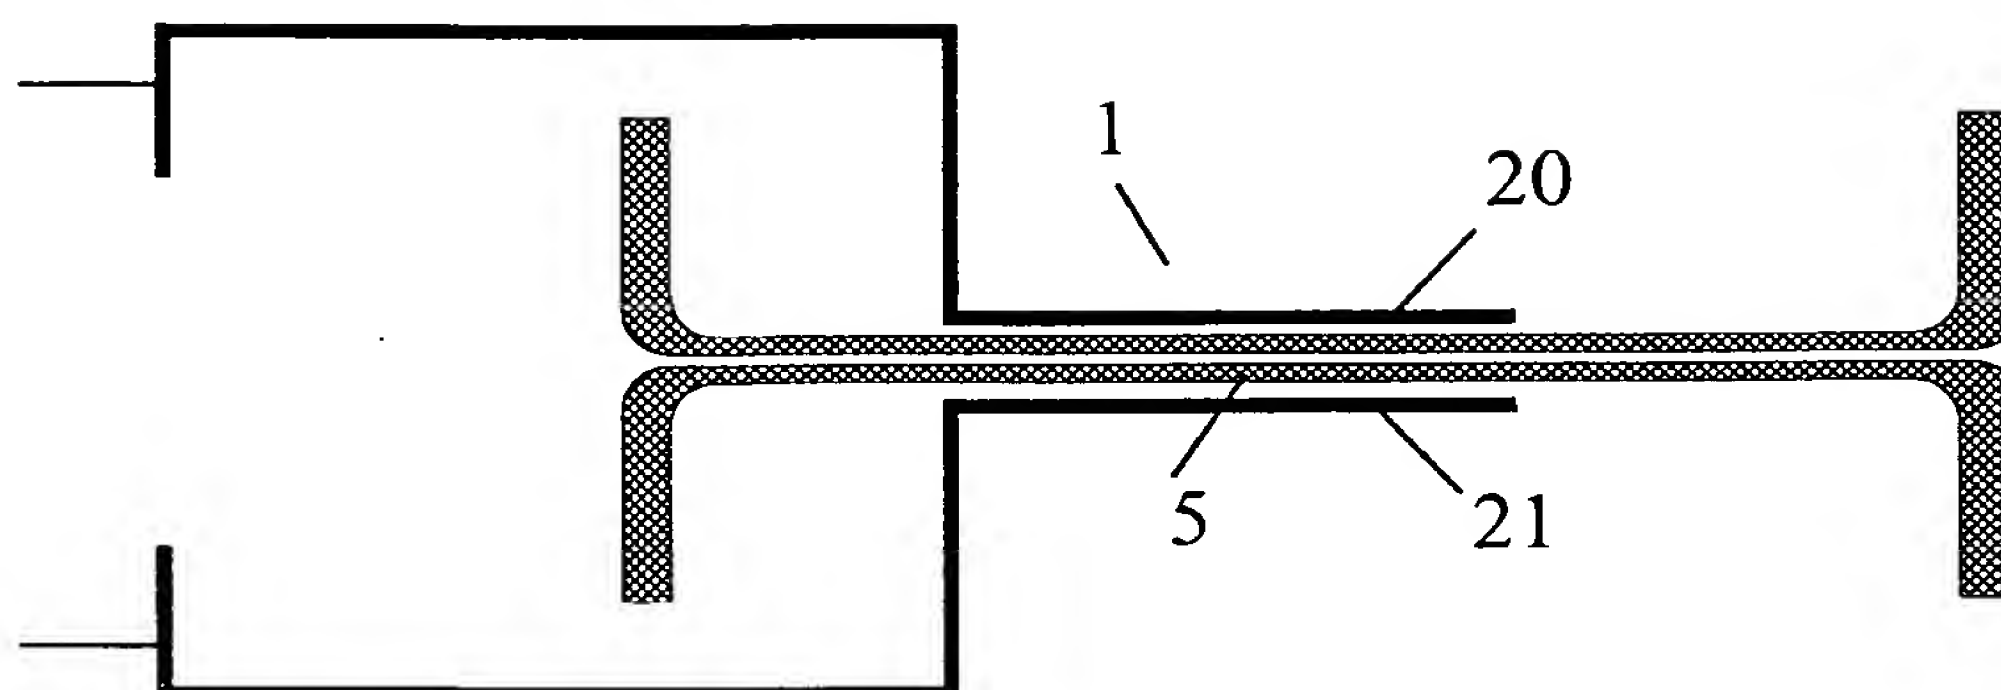


Fig. 3

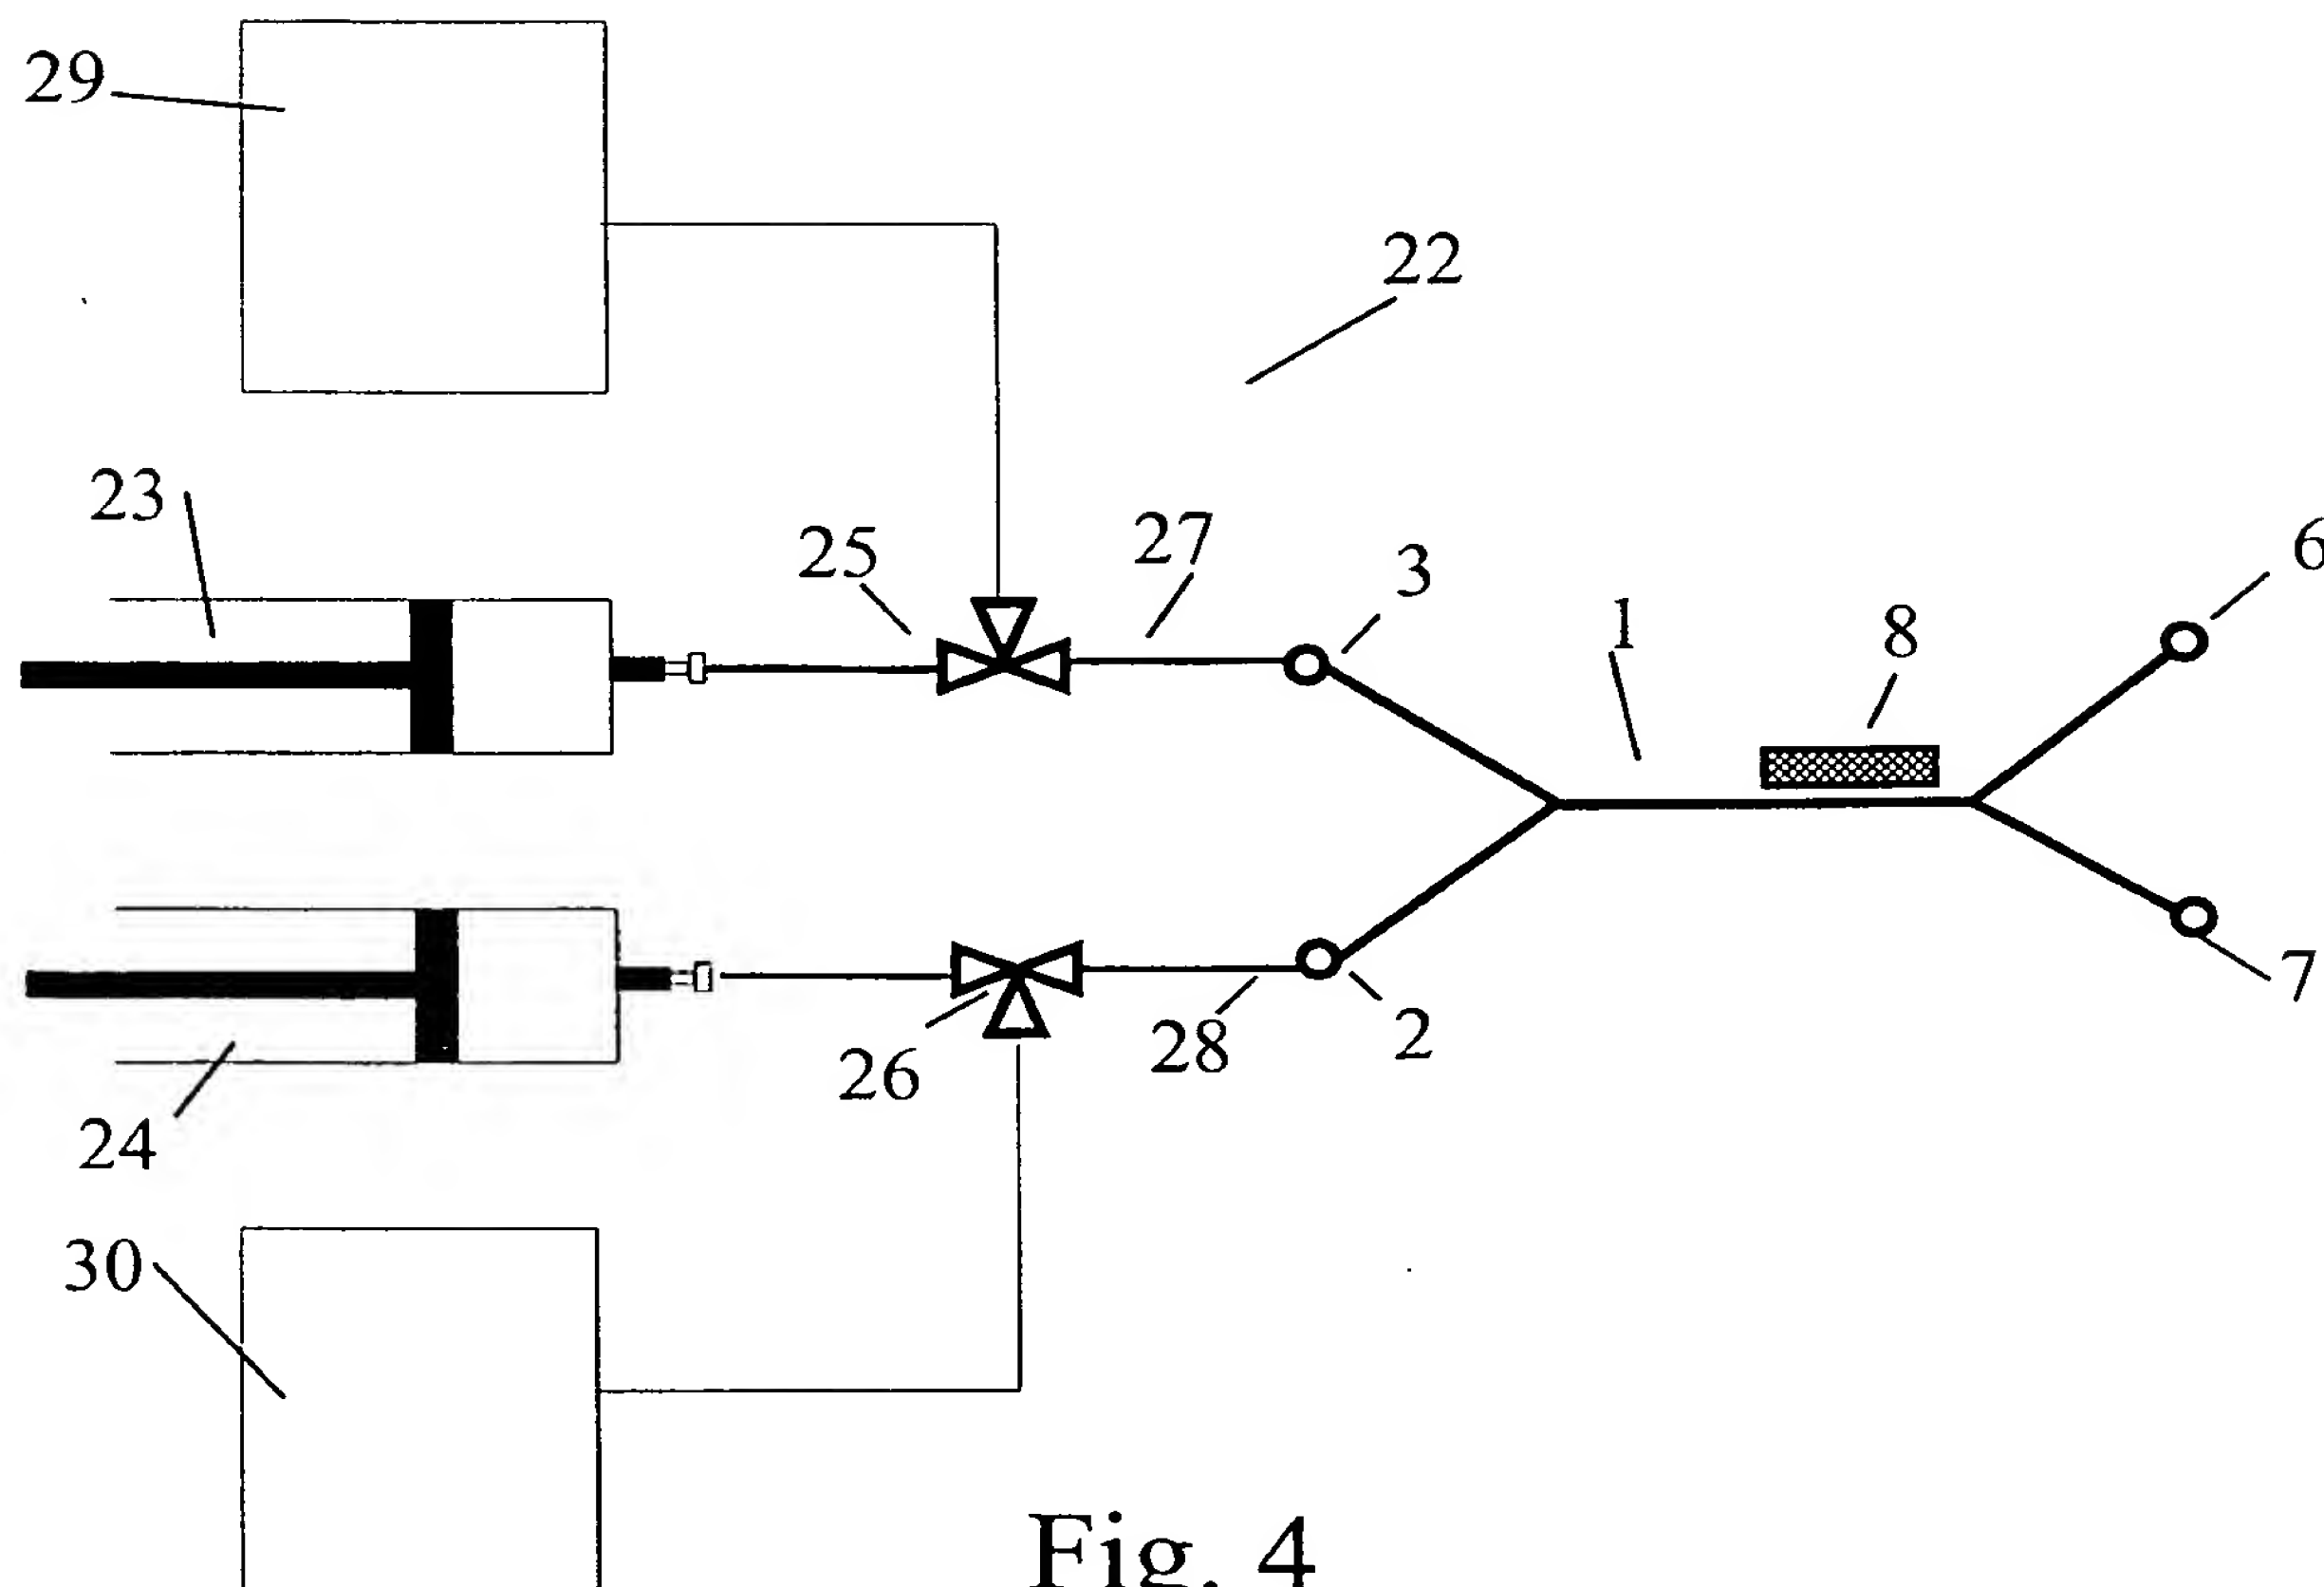


Fig. 4

3/14

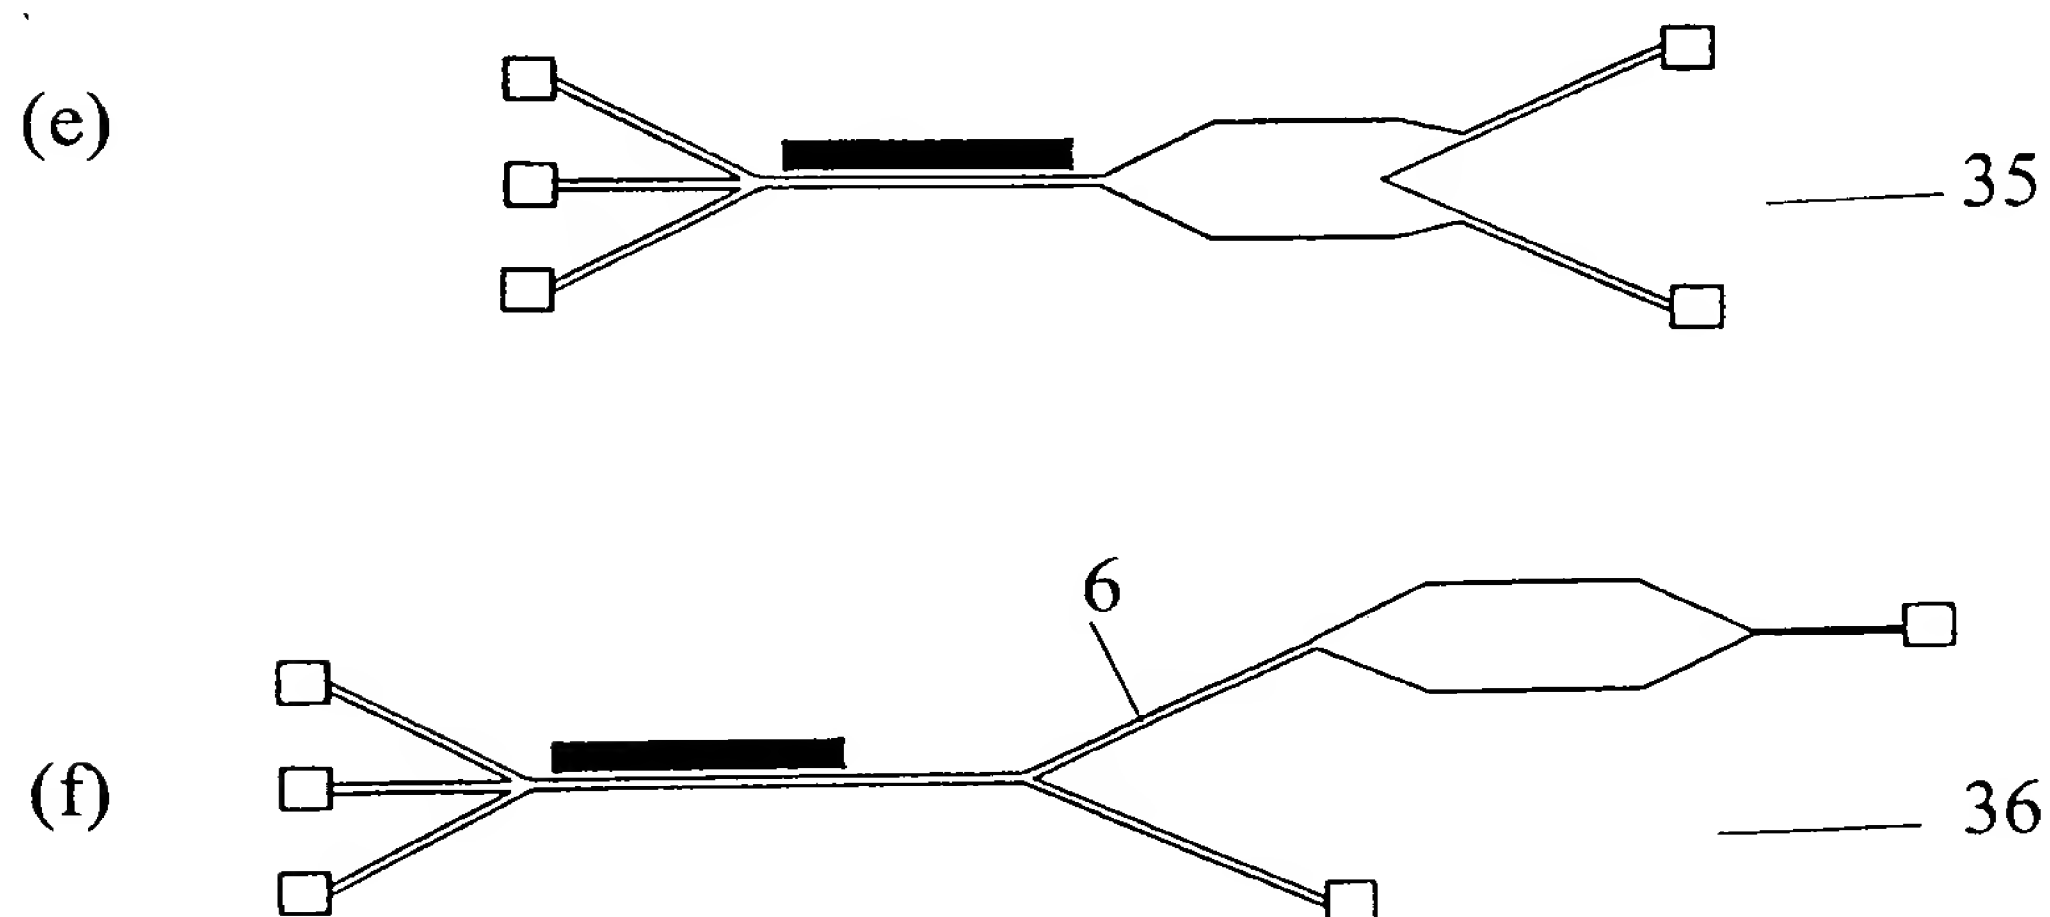
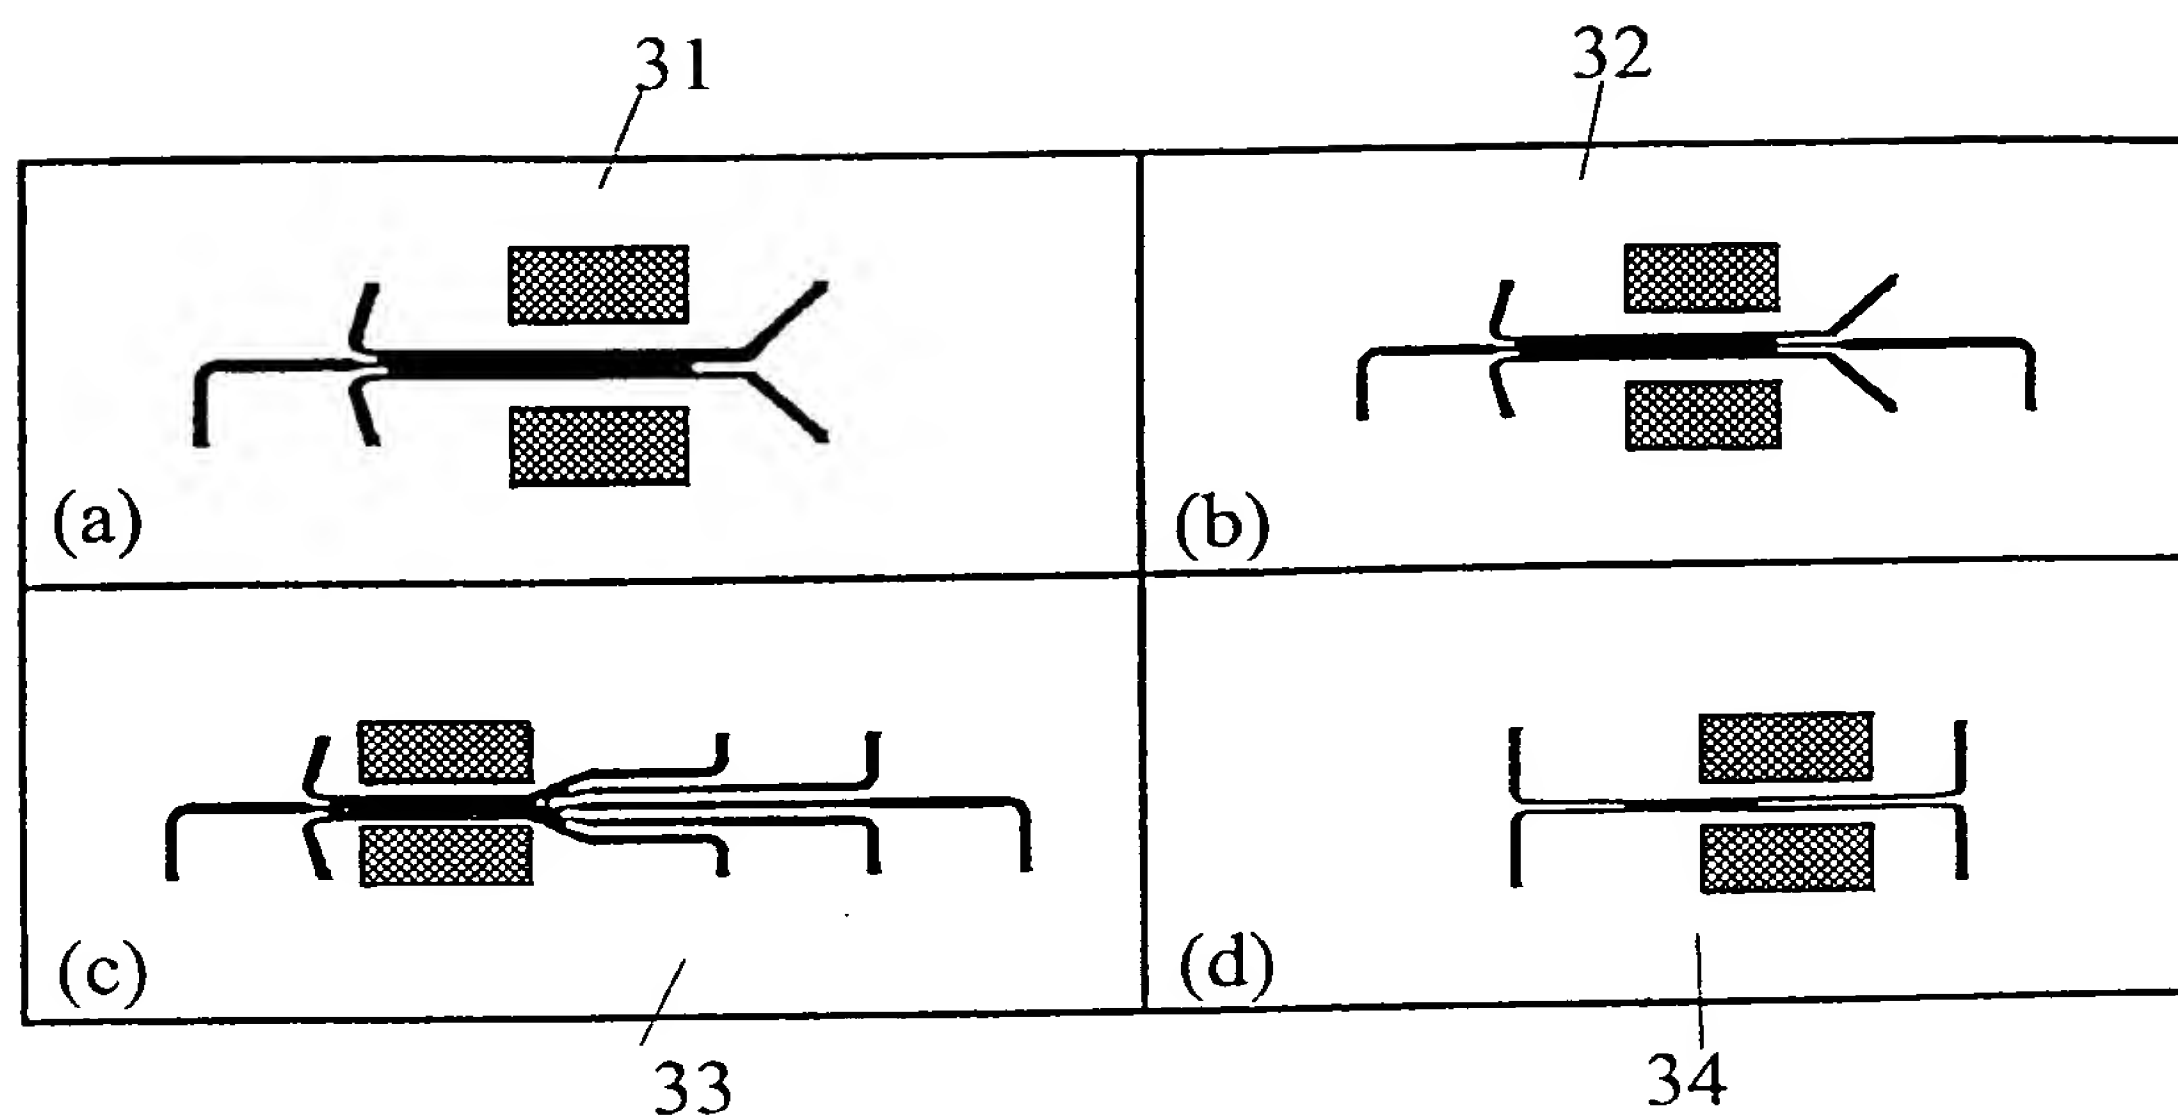


Fig. 5

4/14

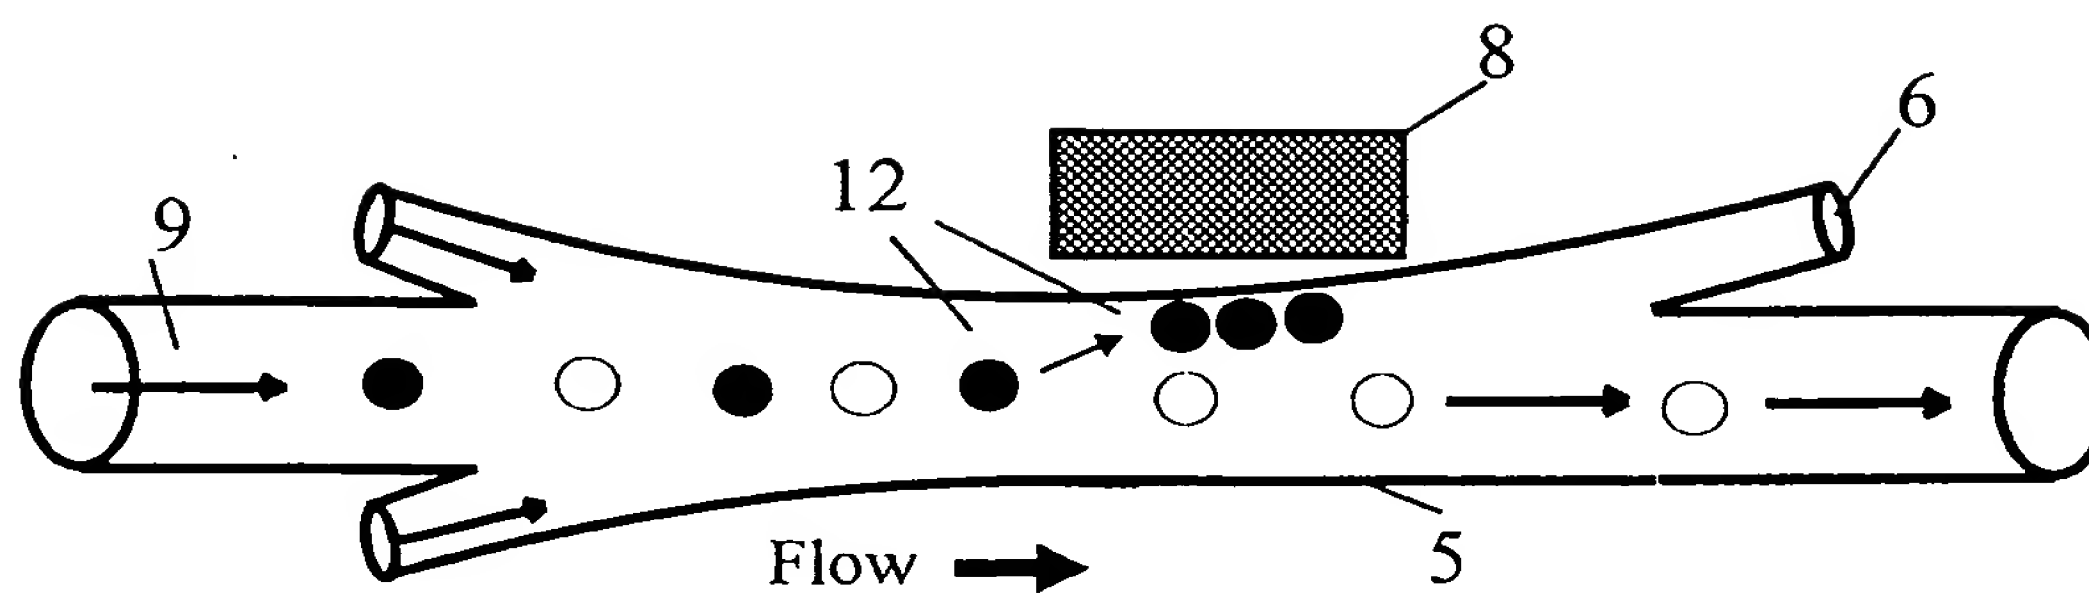


Fig. 6

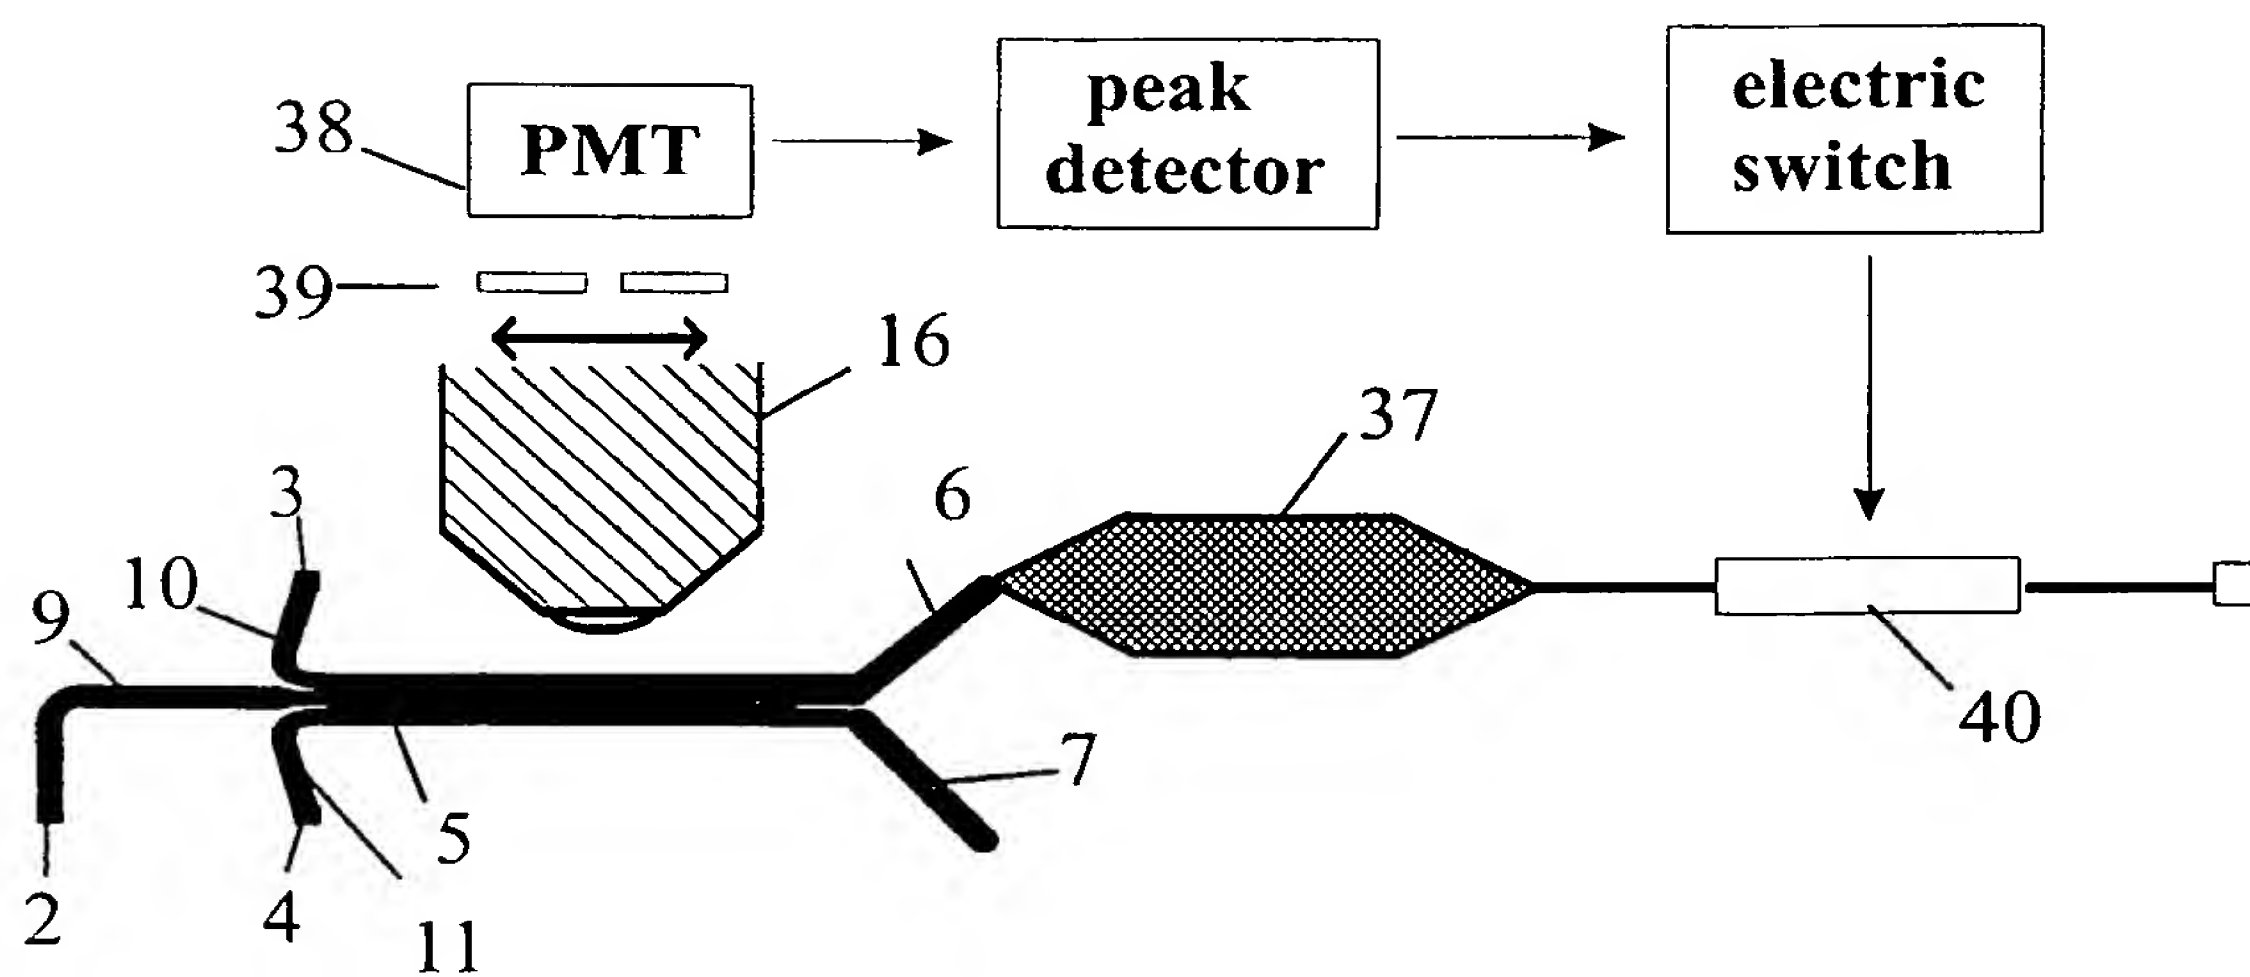


Fig. 7

5/14

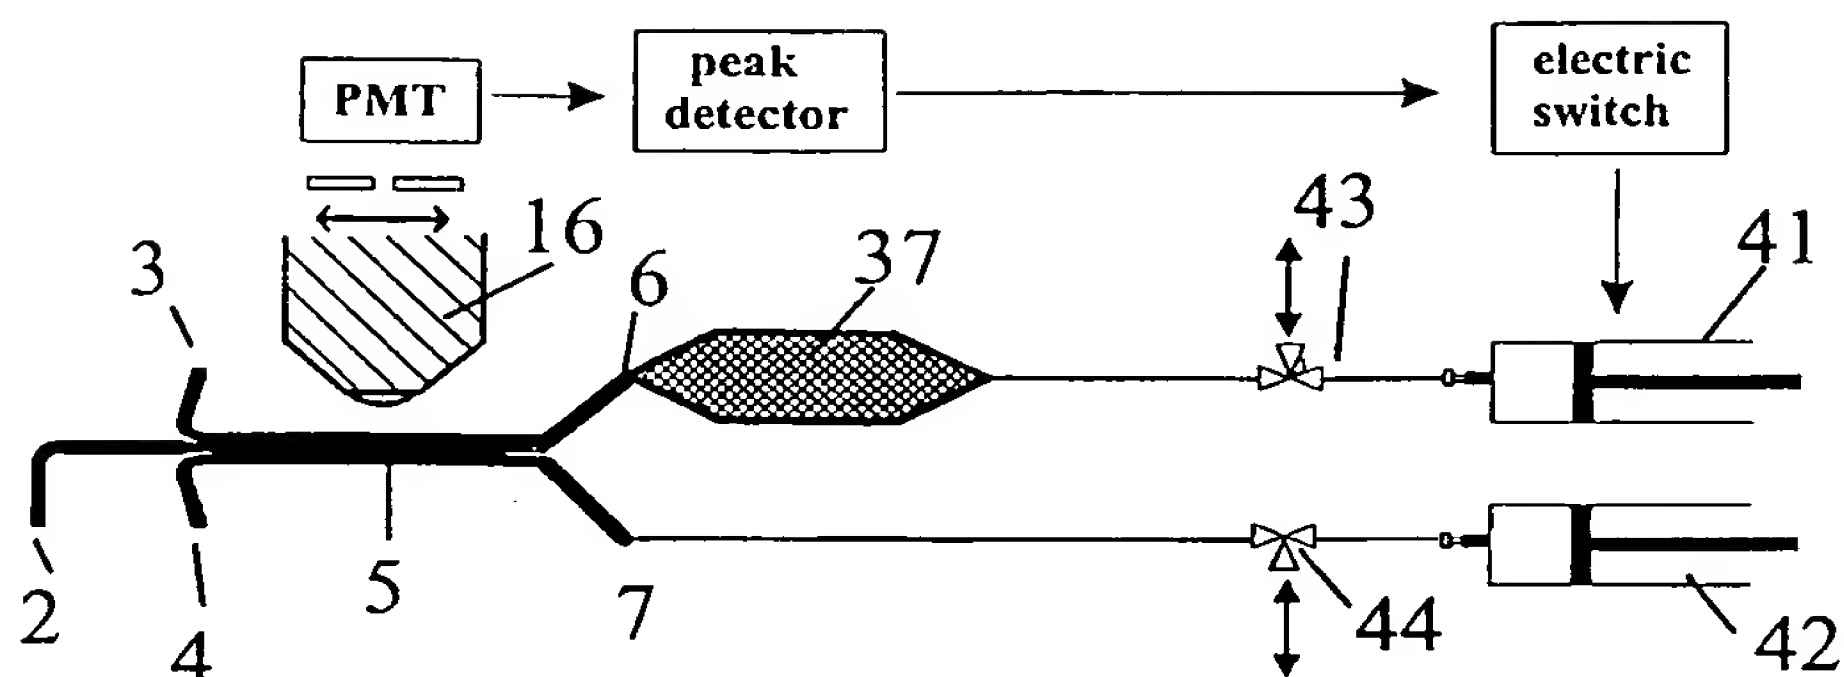


Fig. 8

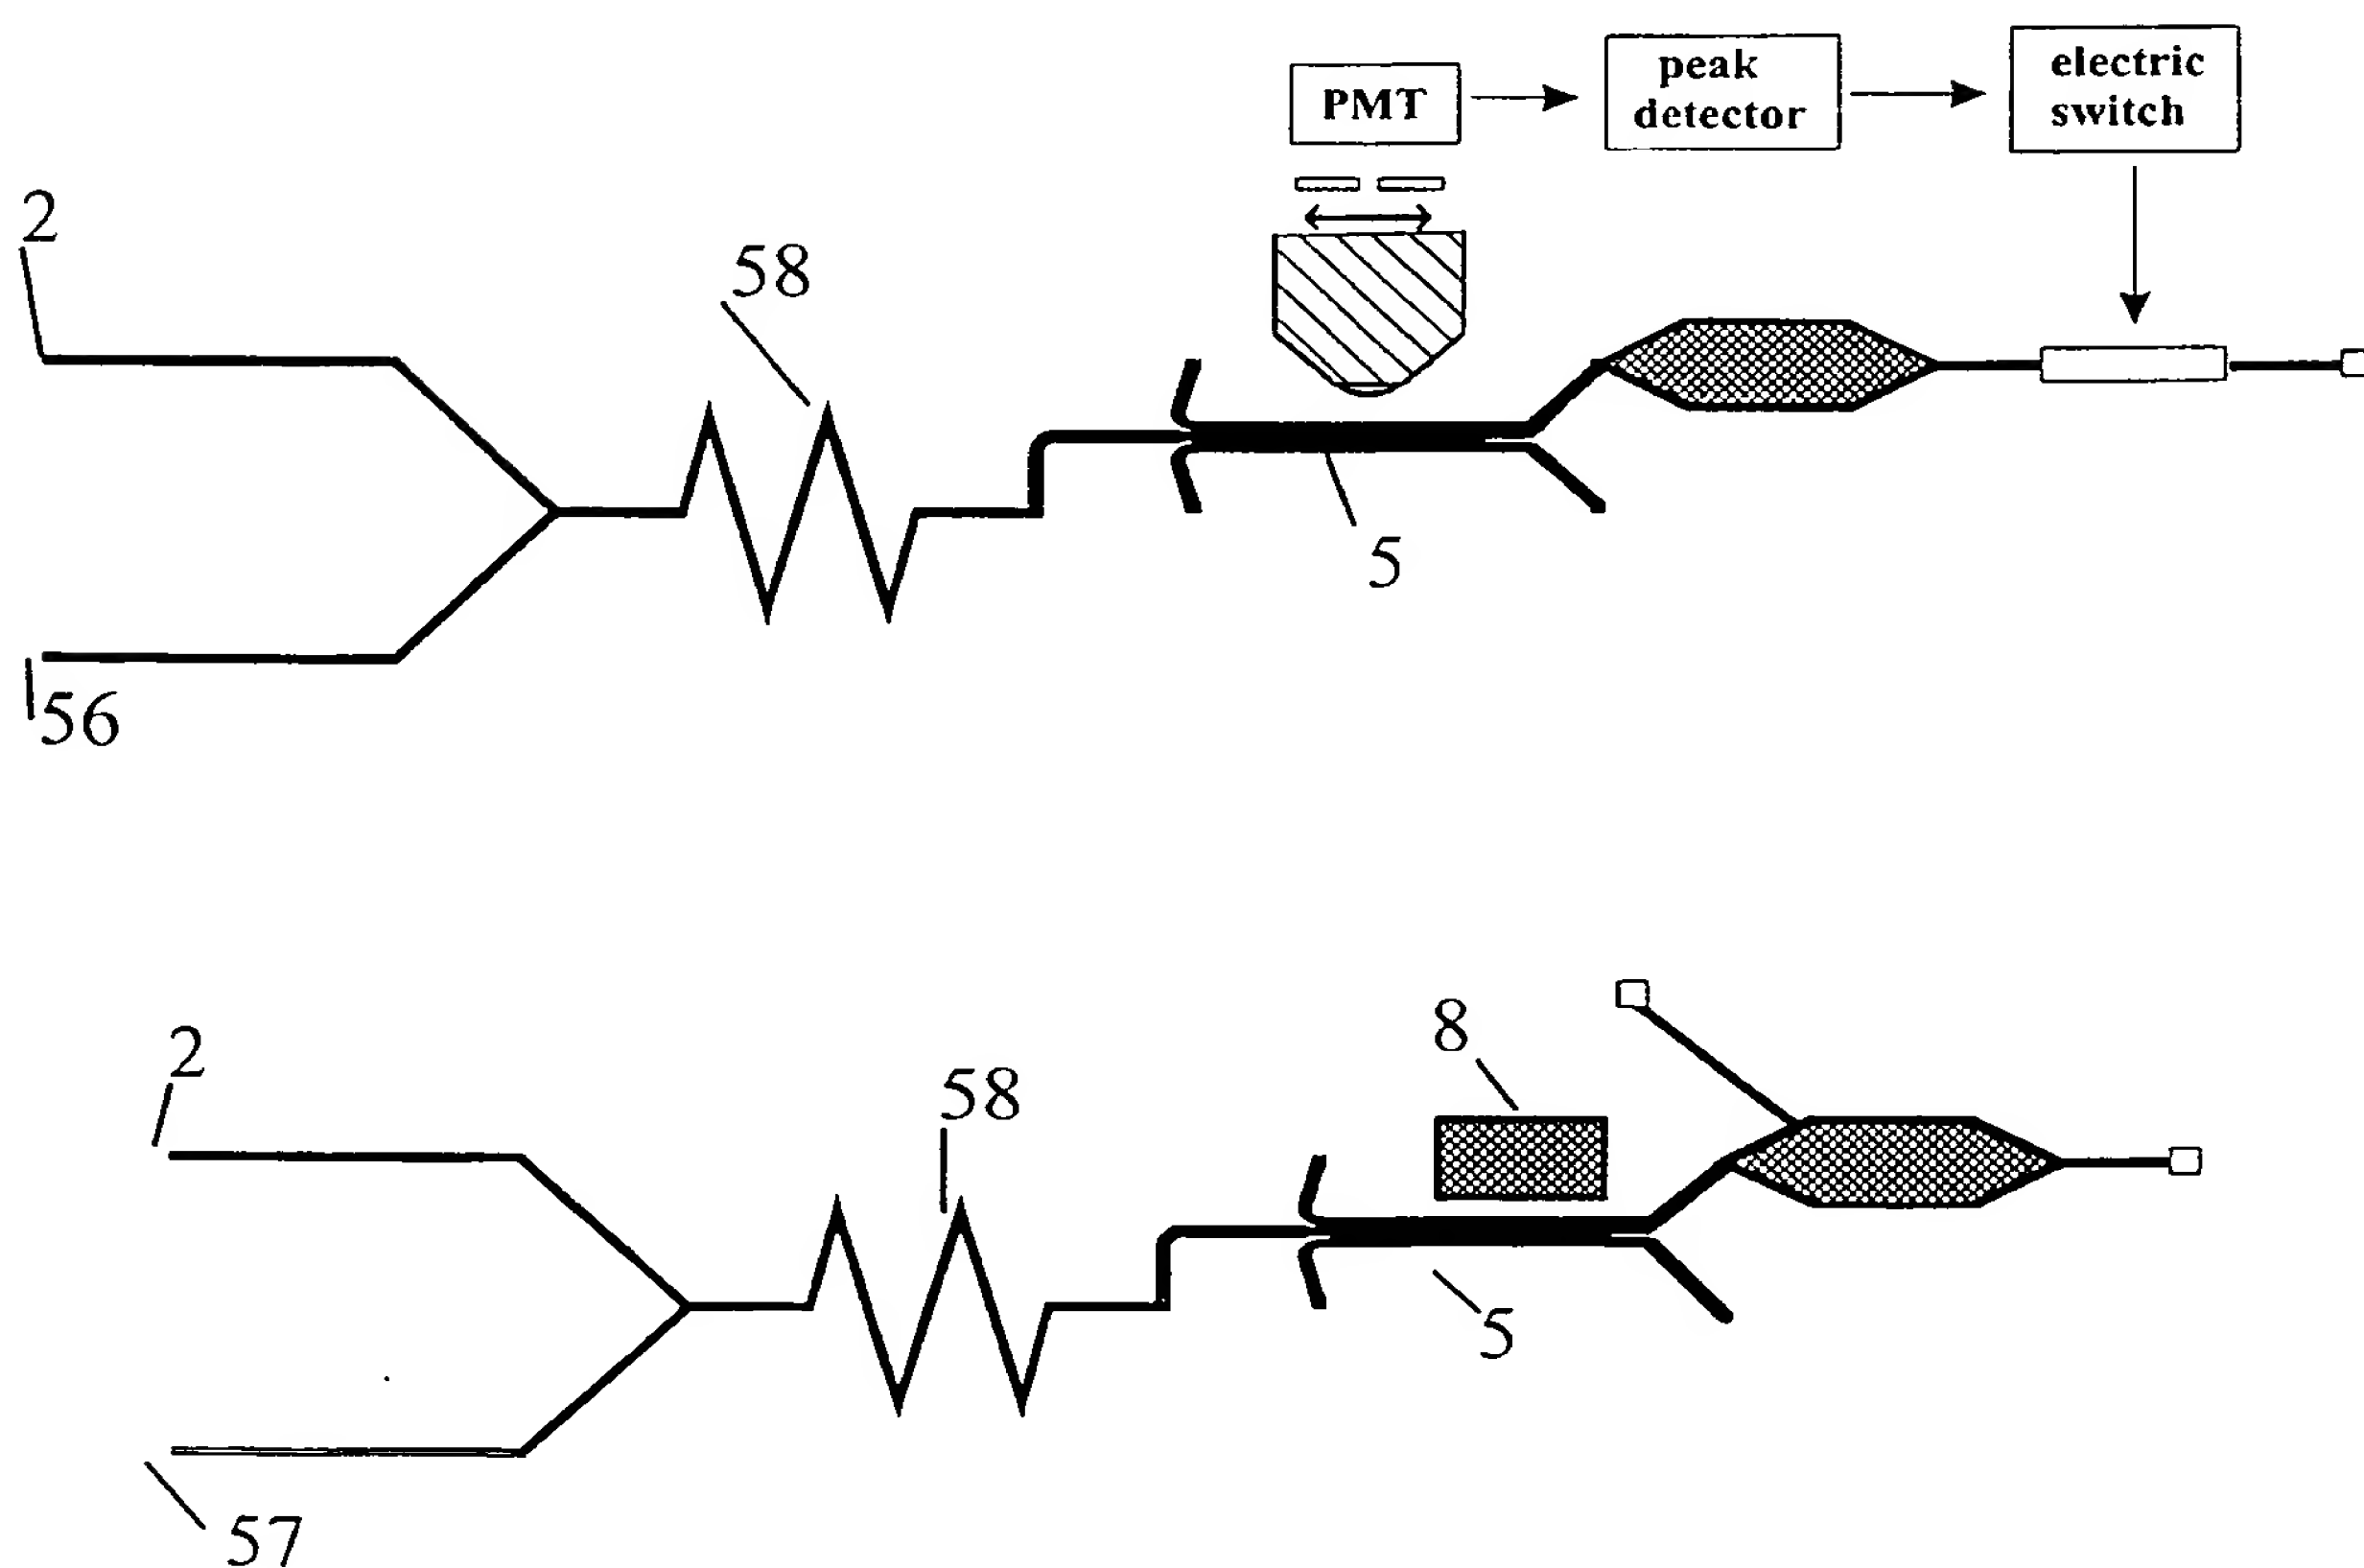


Fig. 10

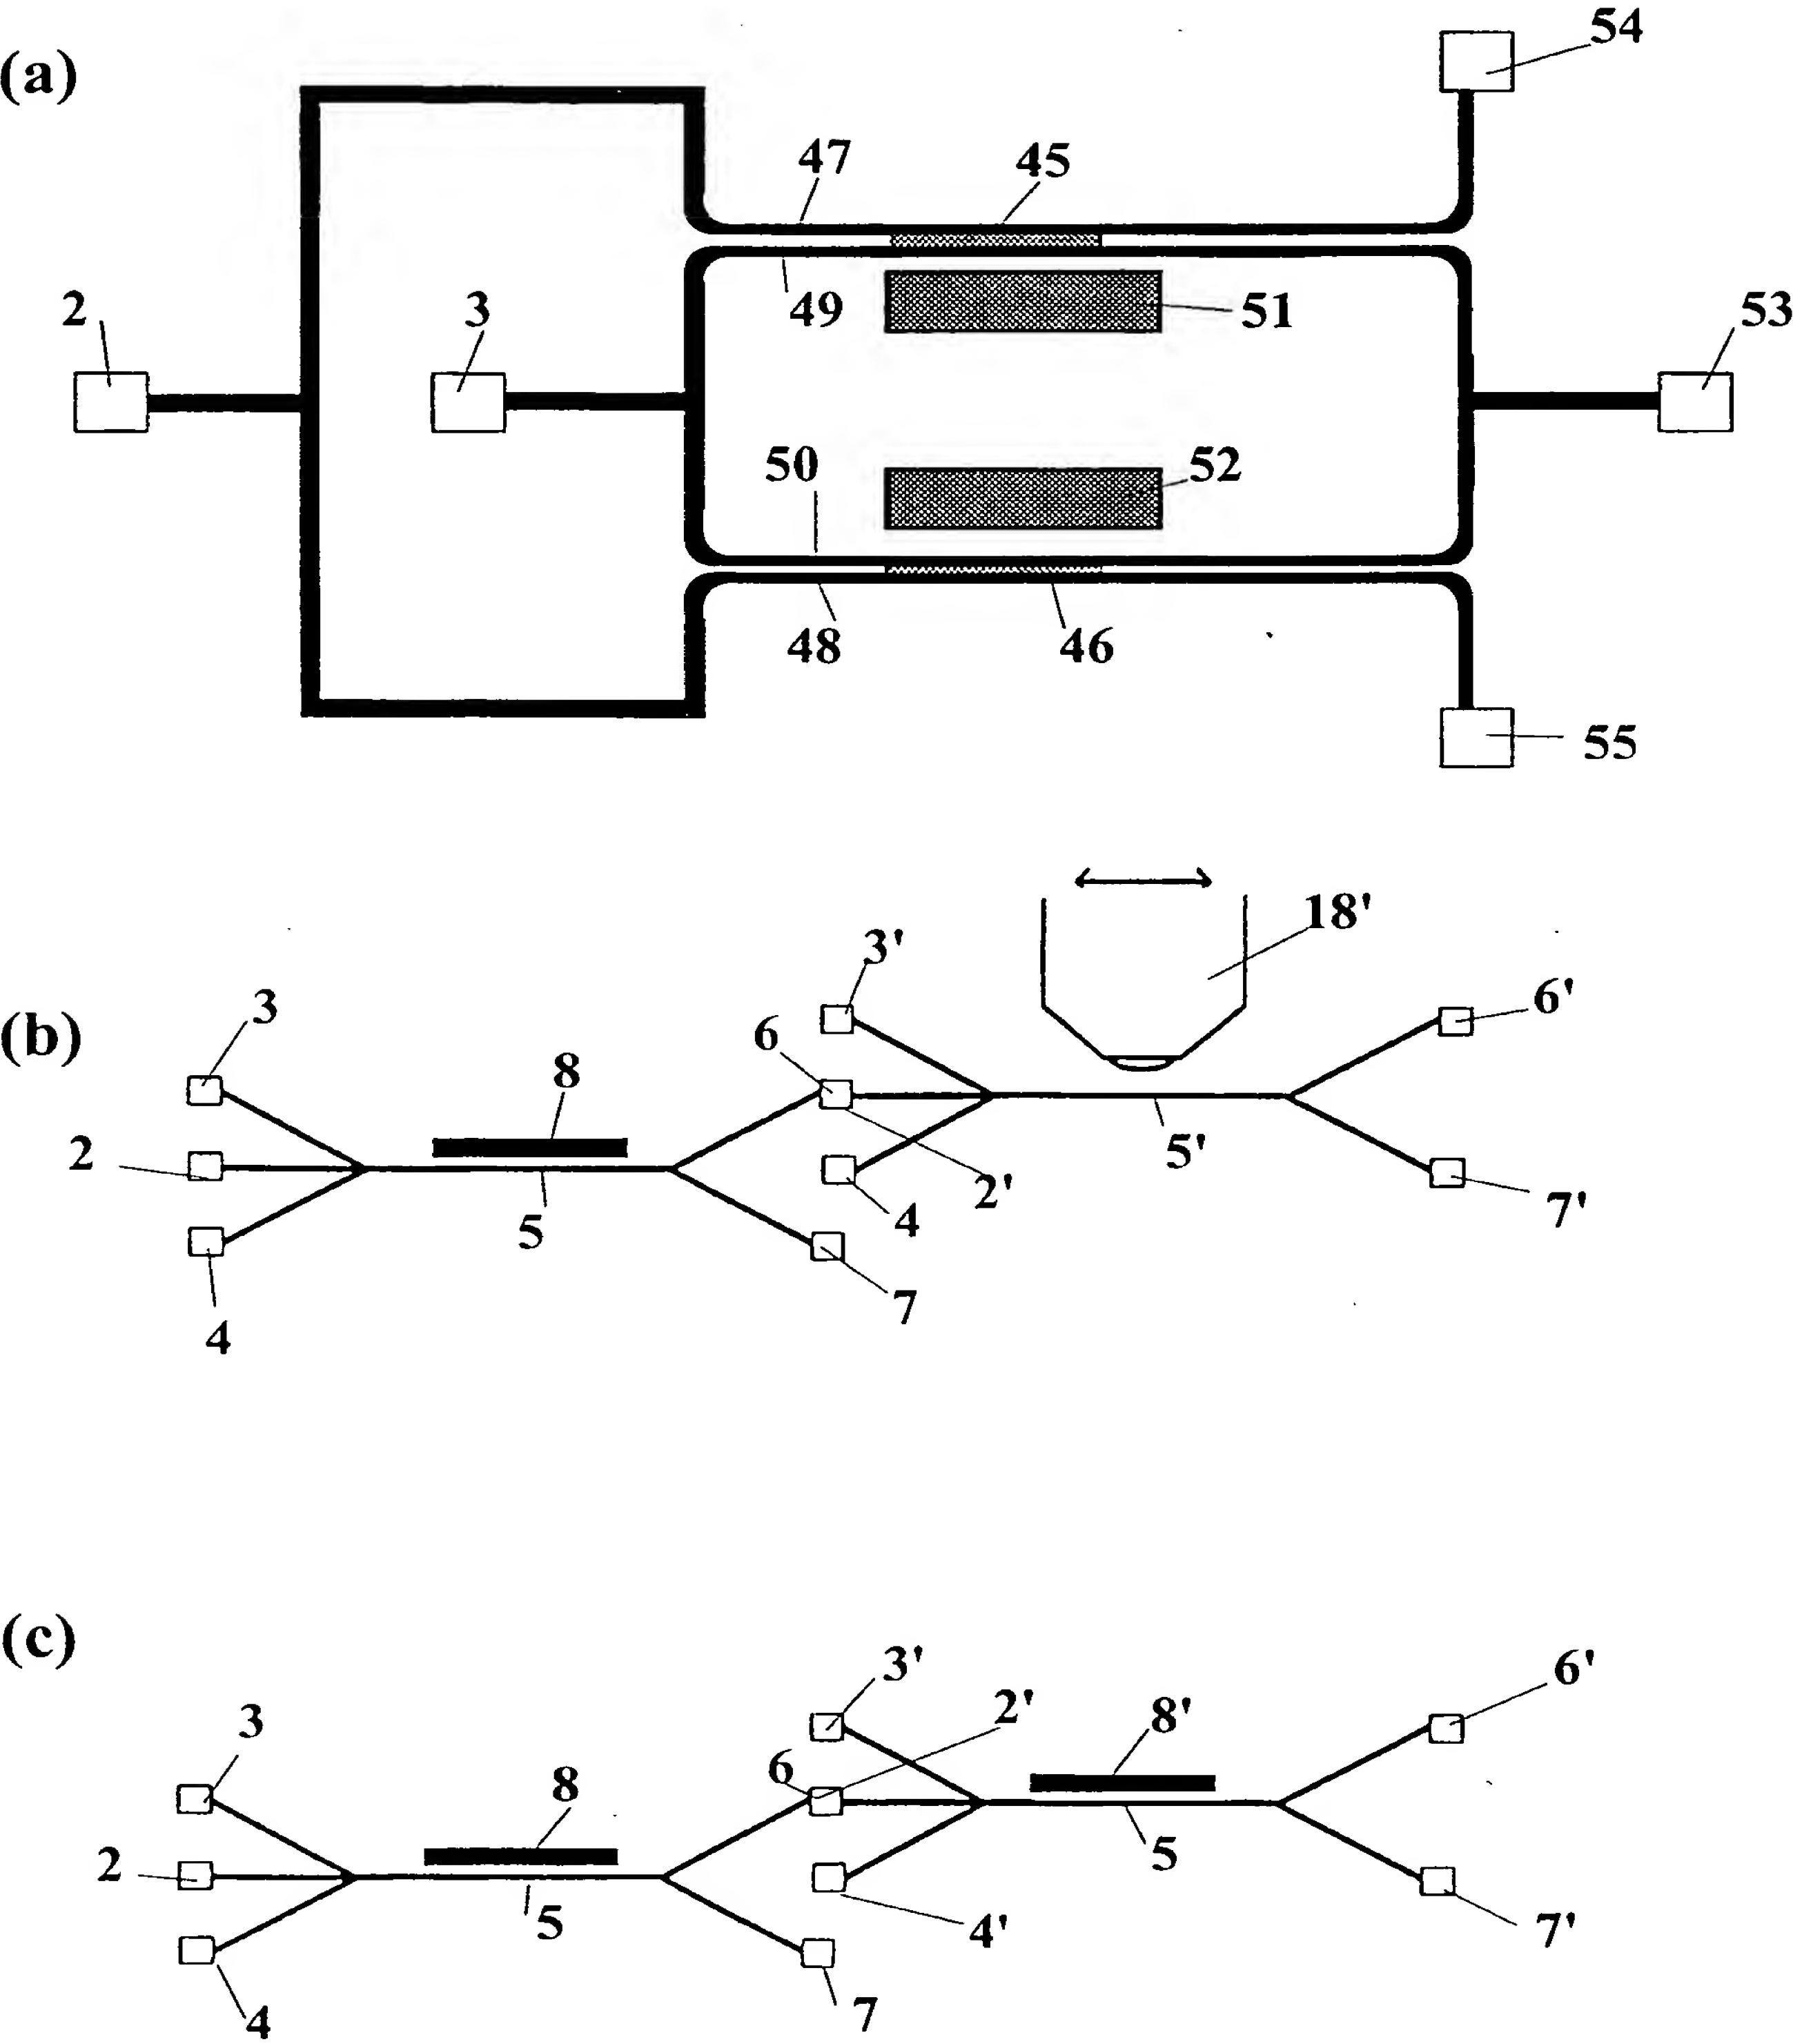


Fig. 9

7/14


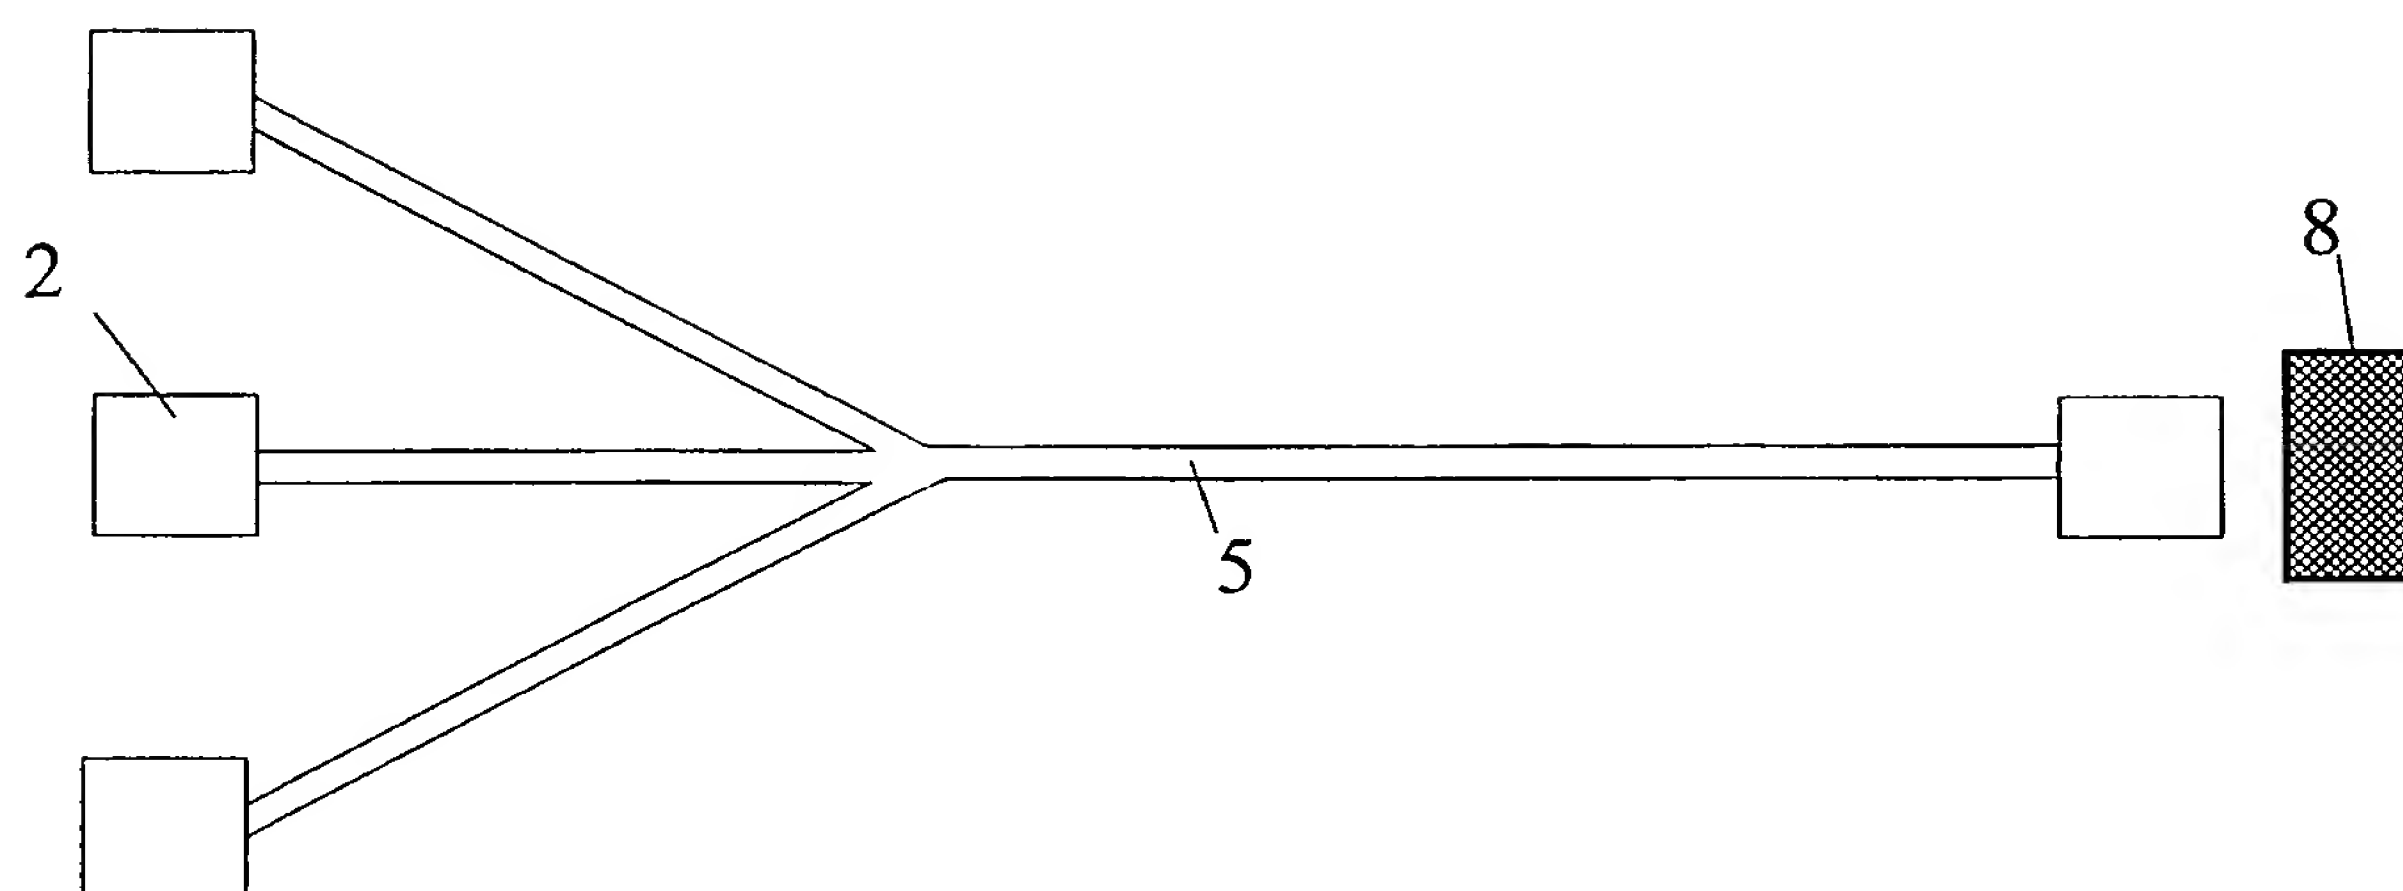


Fig. 11

8/14

(a)

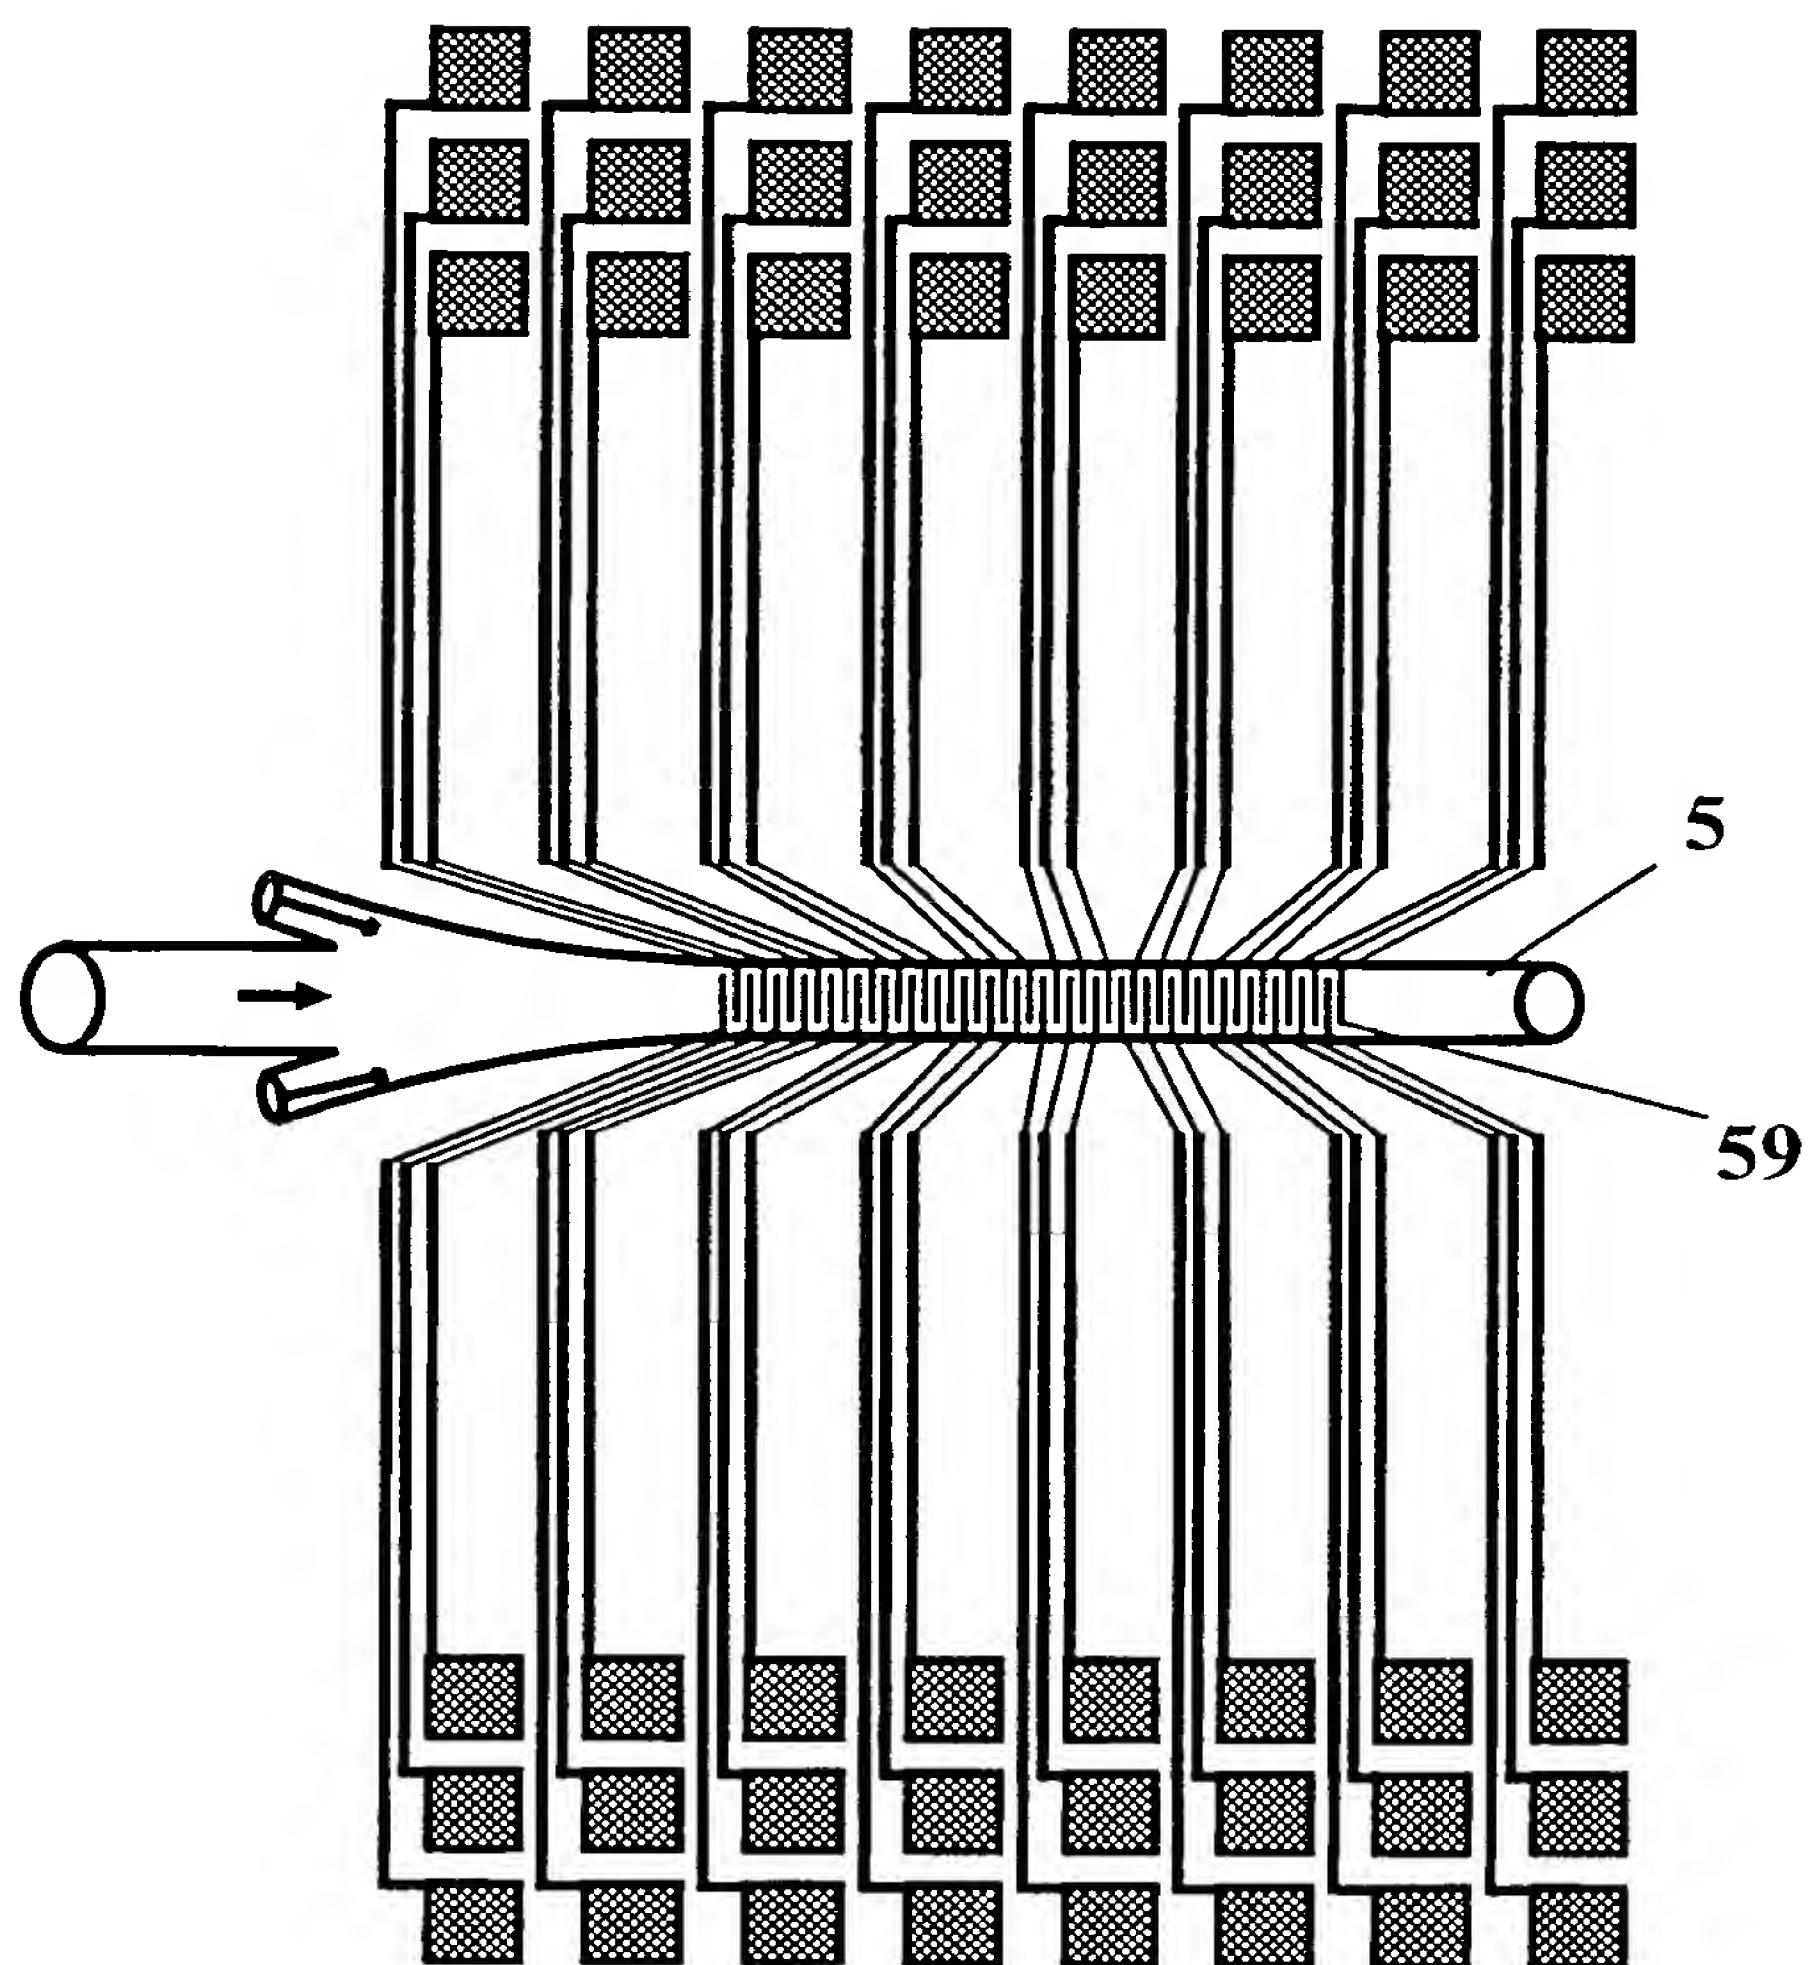

(b)


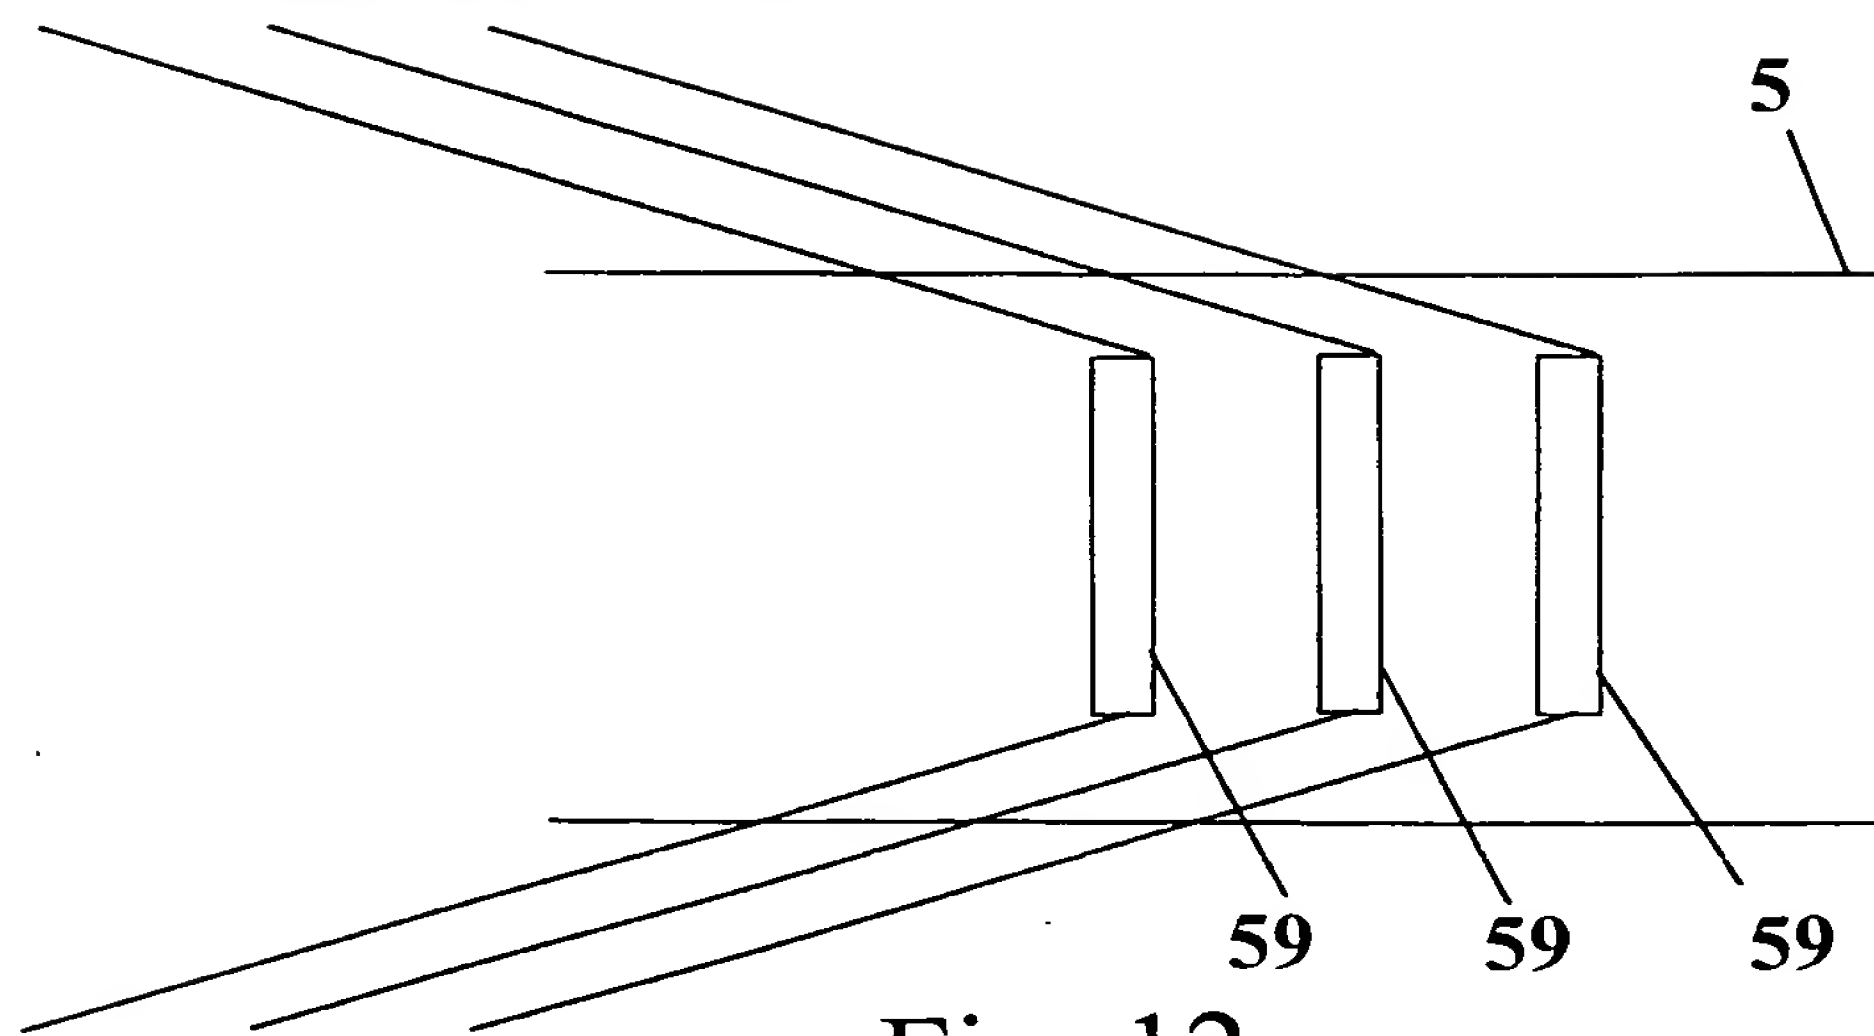


Fig. 12

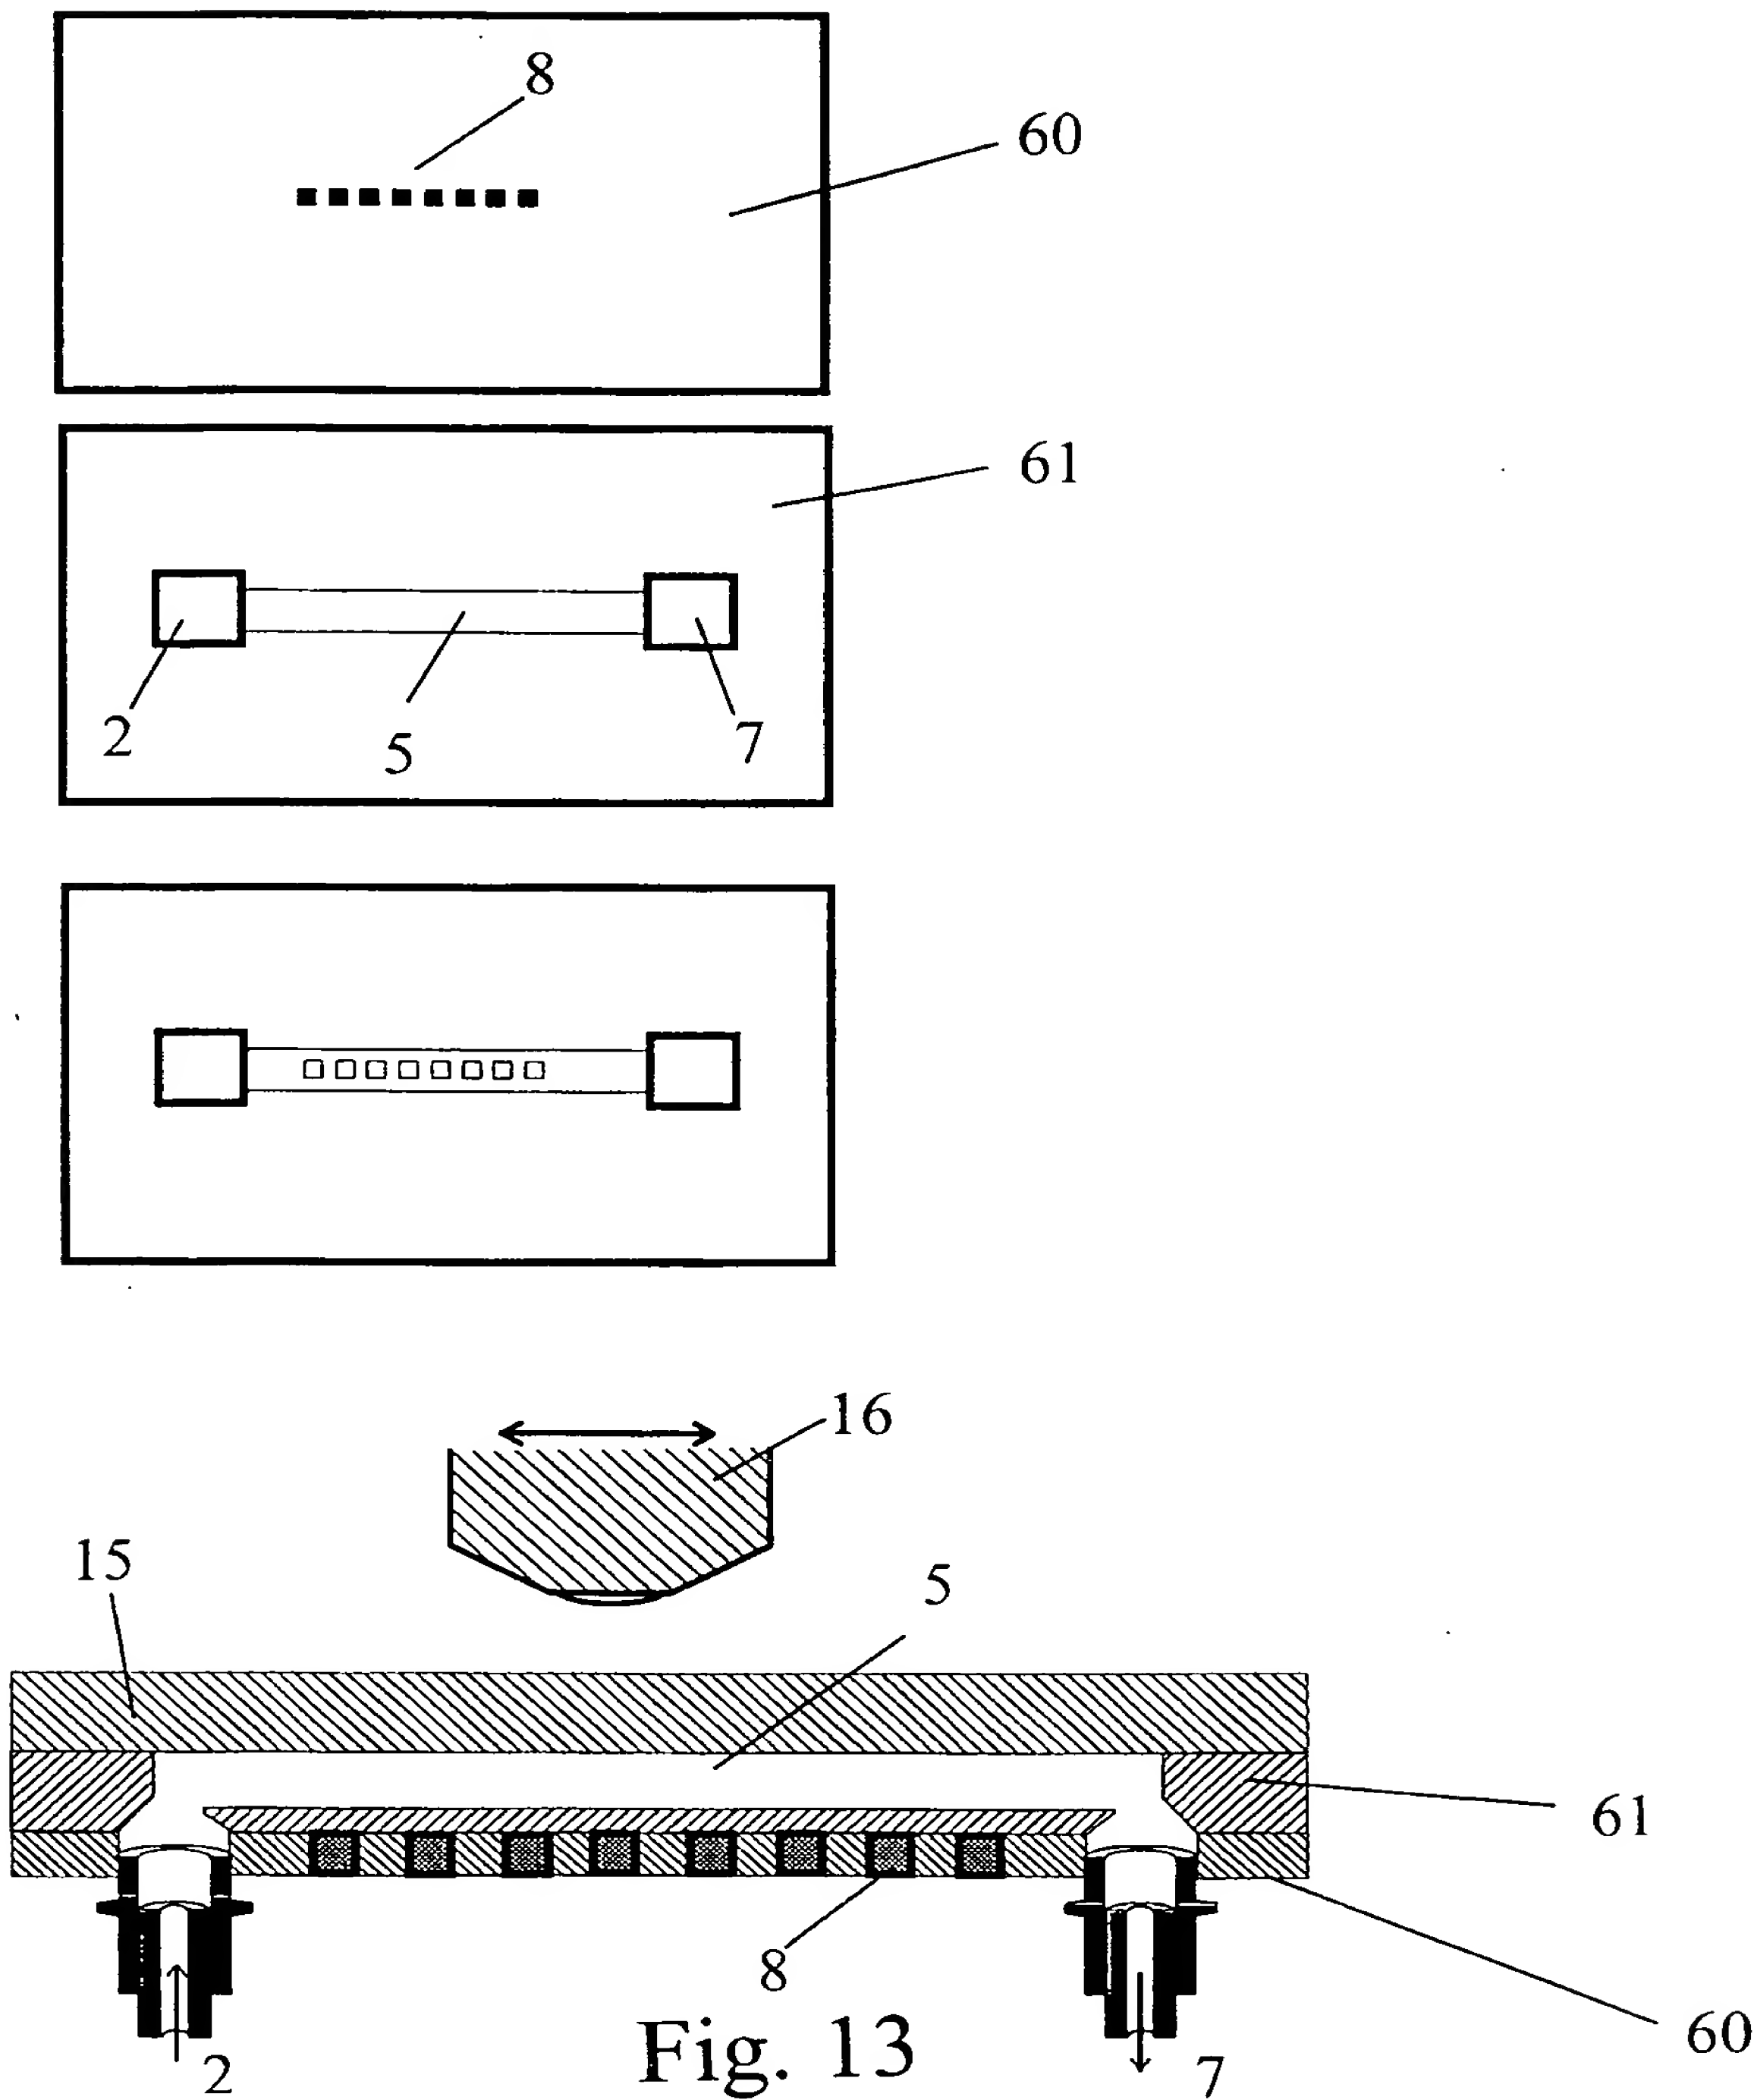

10/14

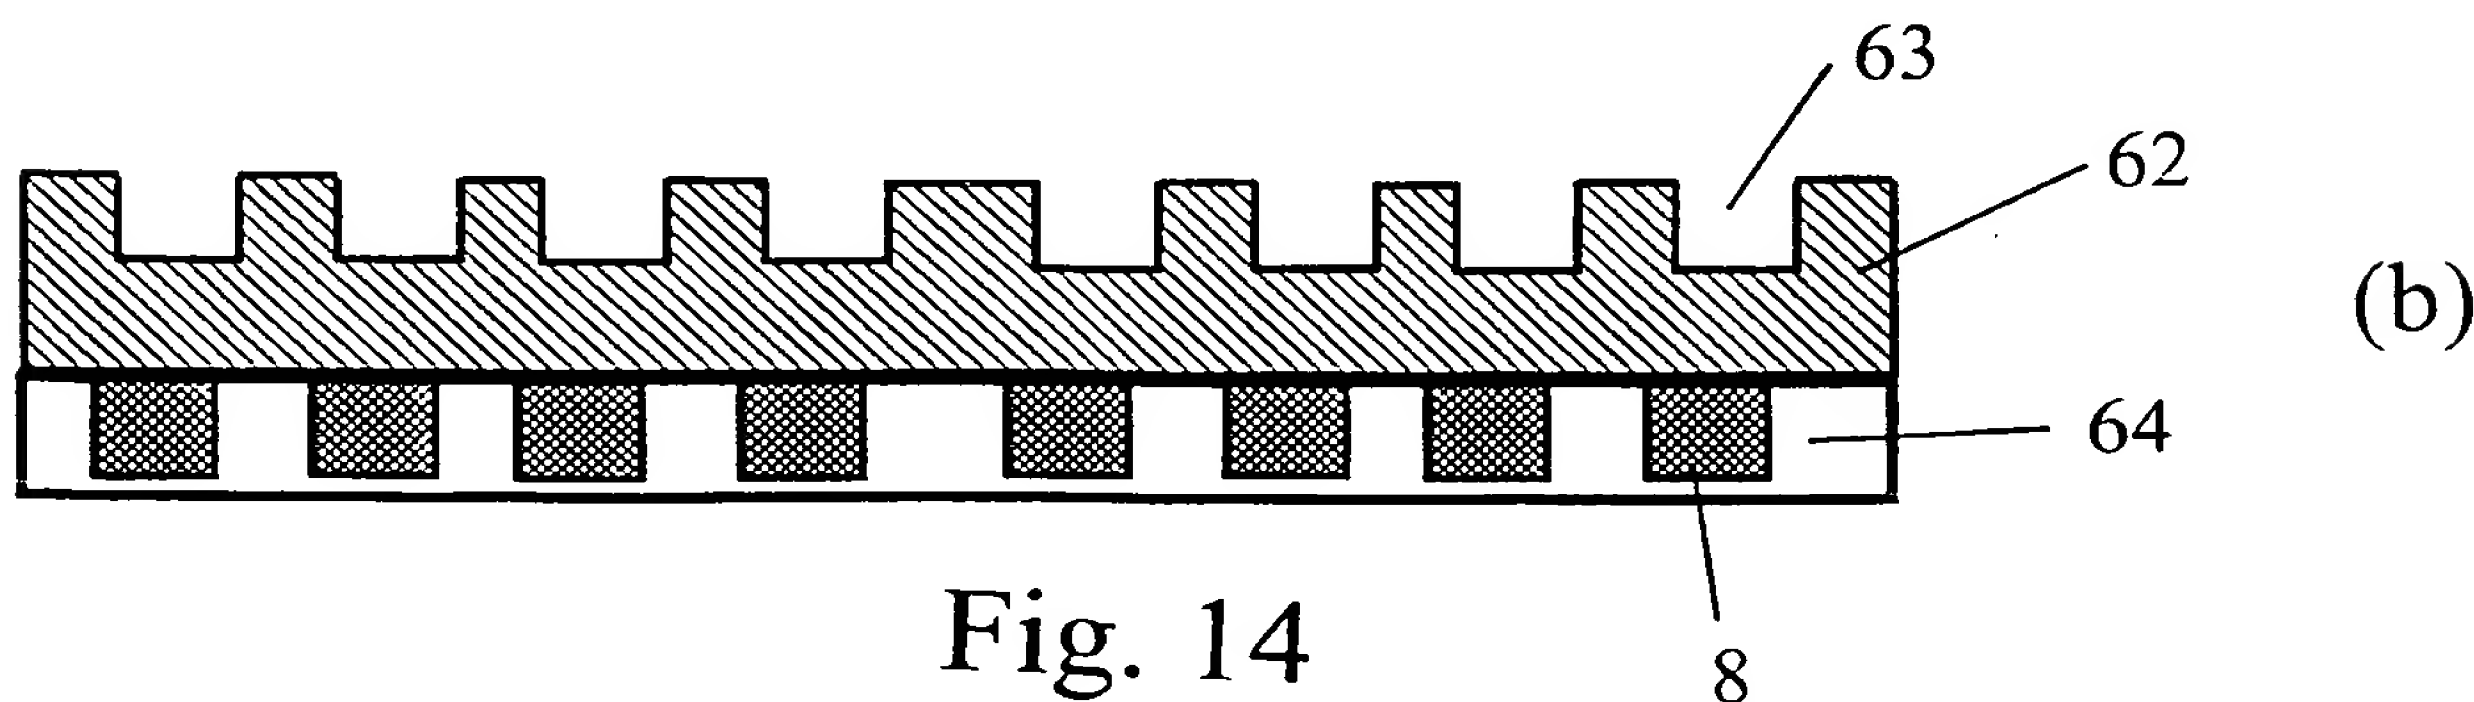
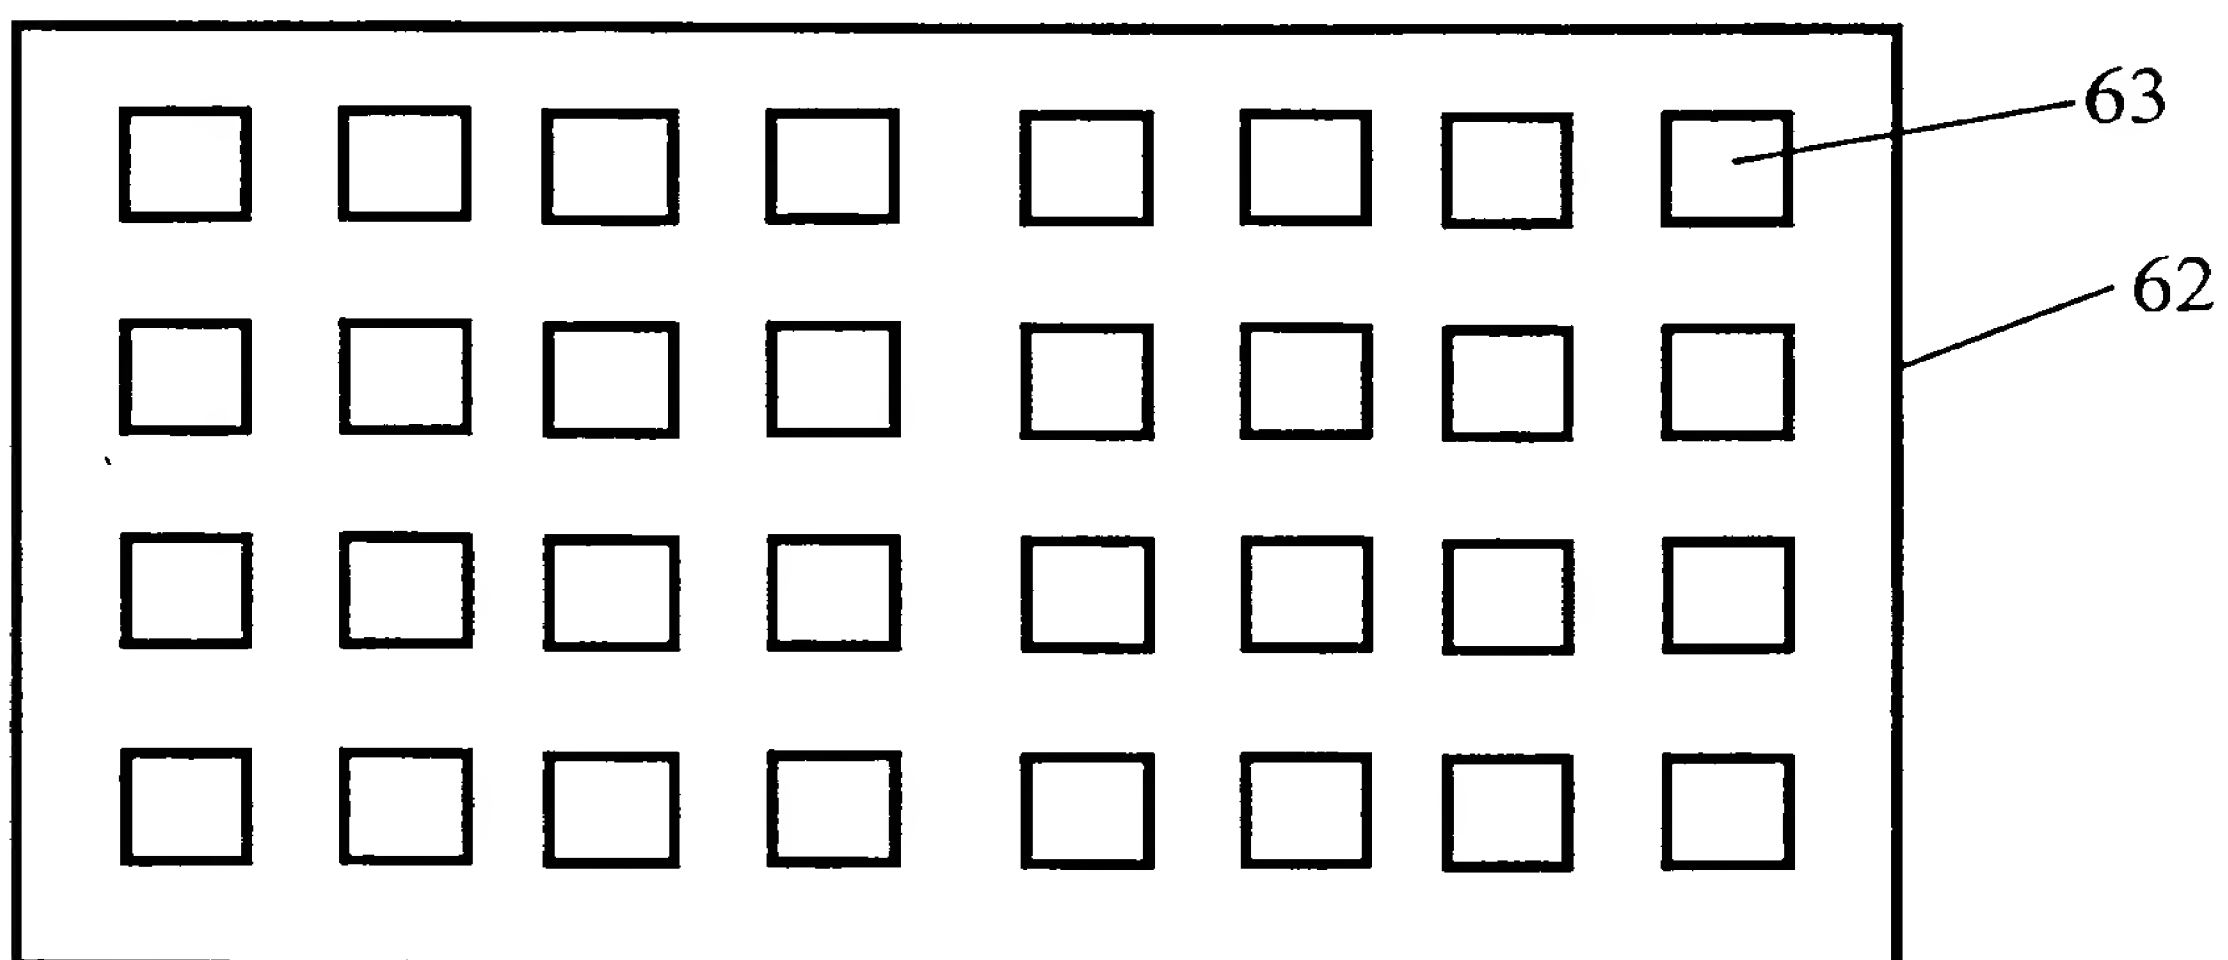
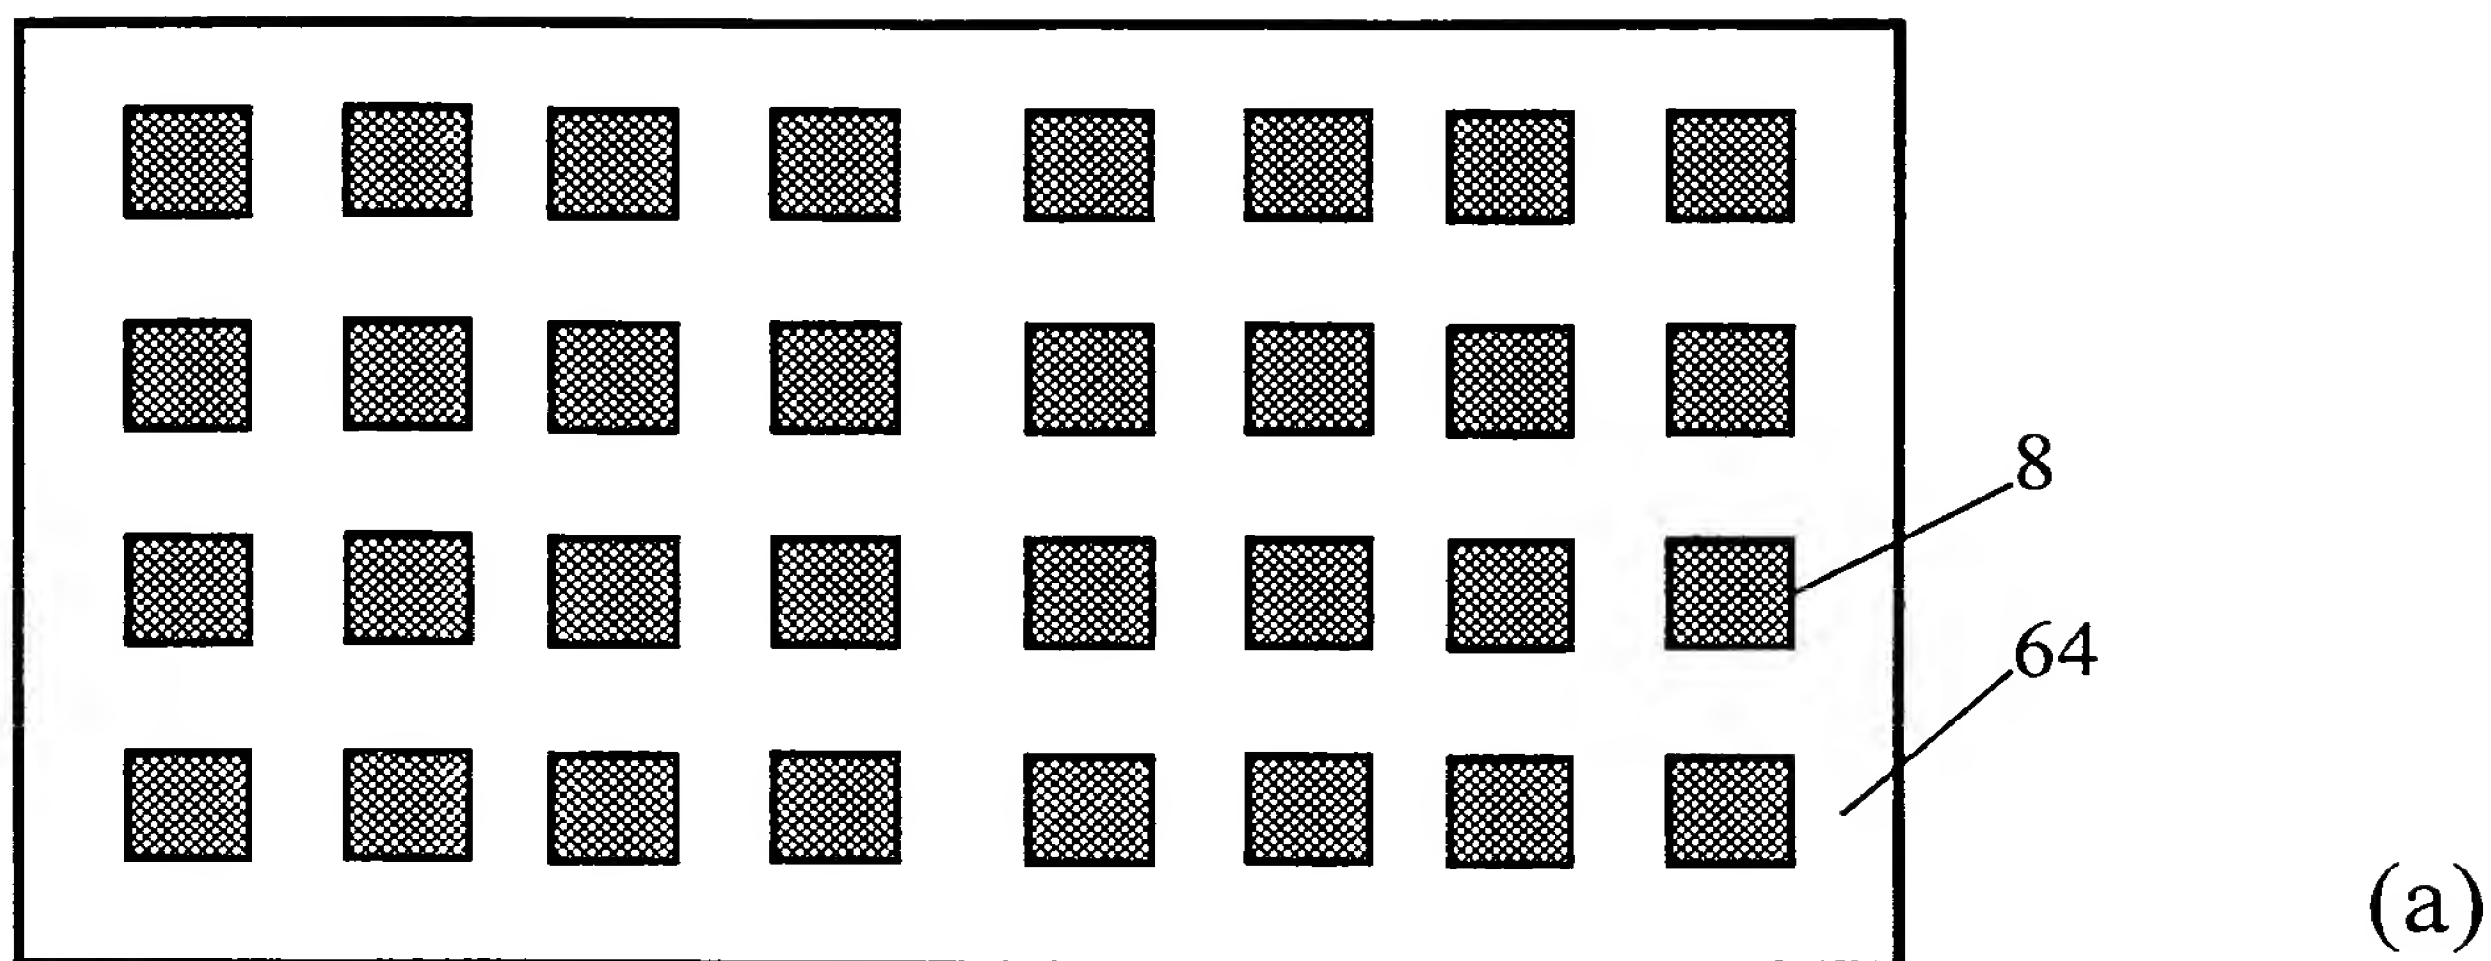


Fig. 14

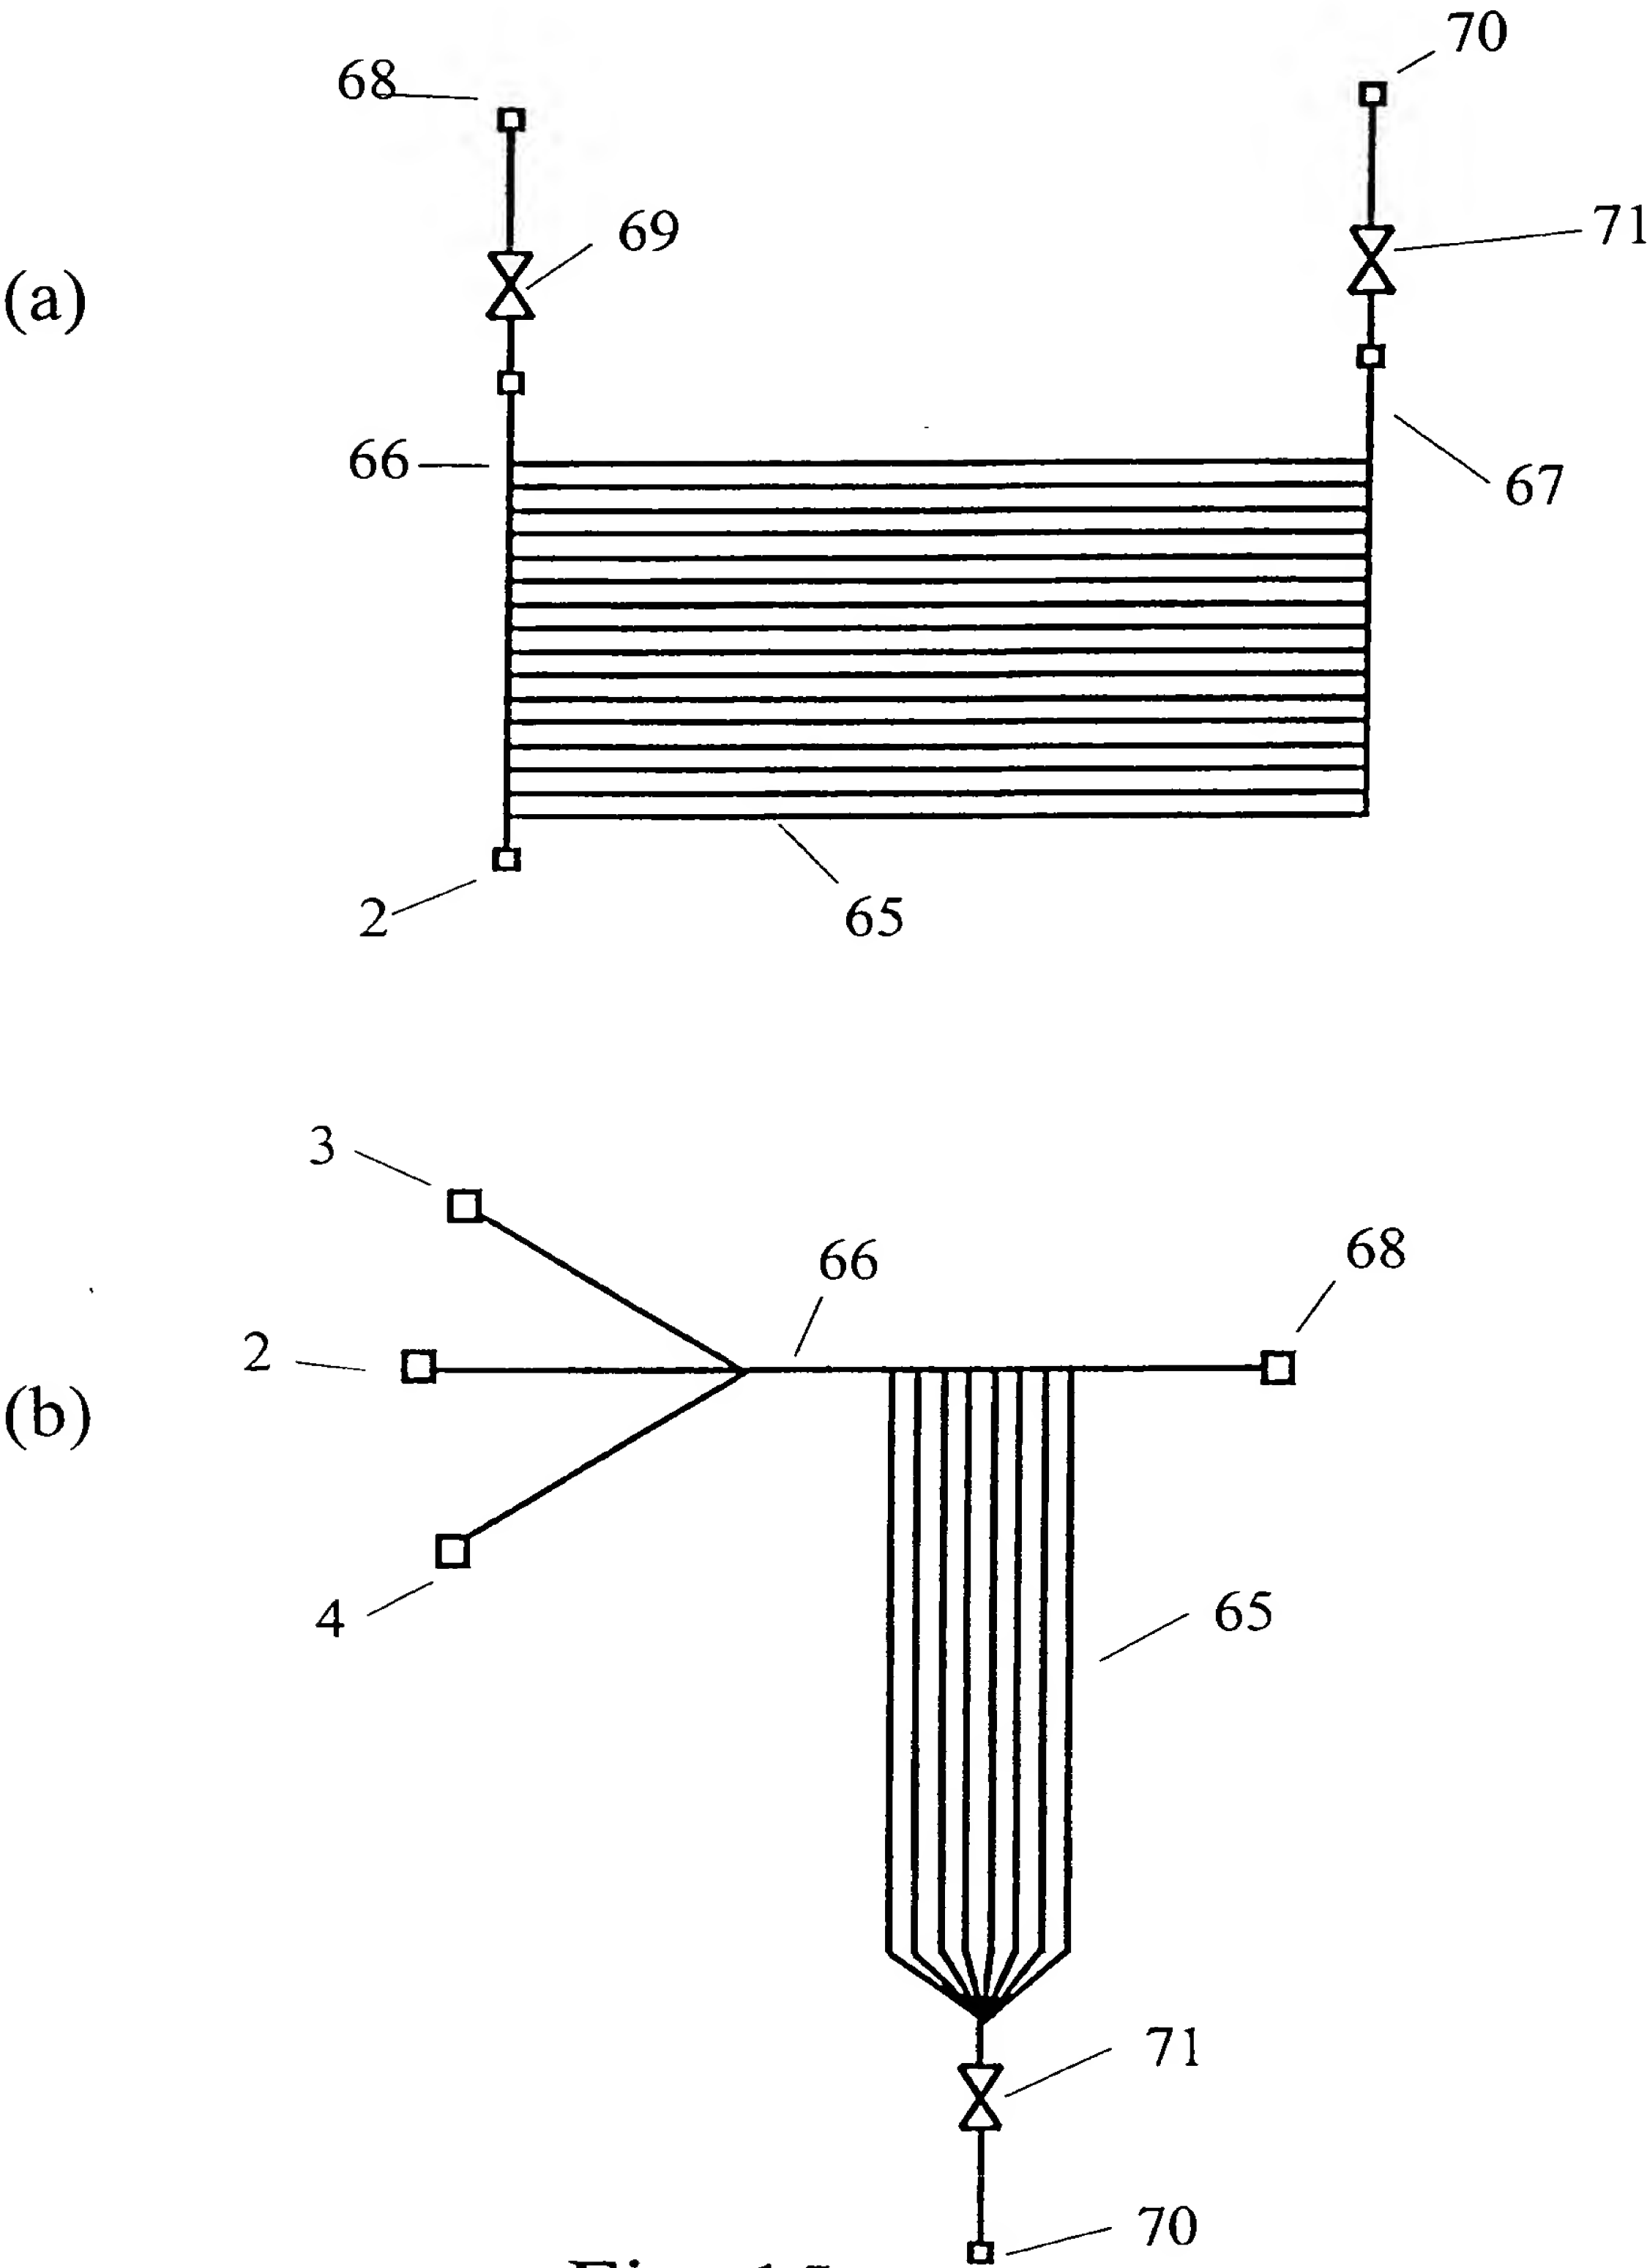


Fig. 15

12/14

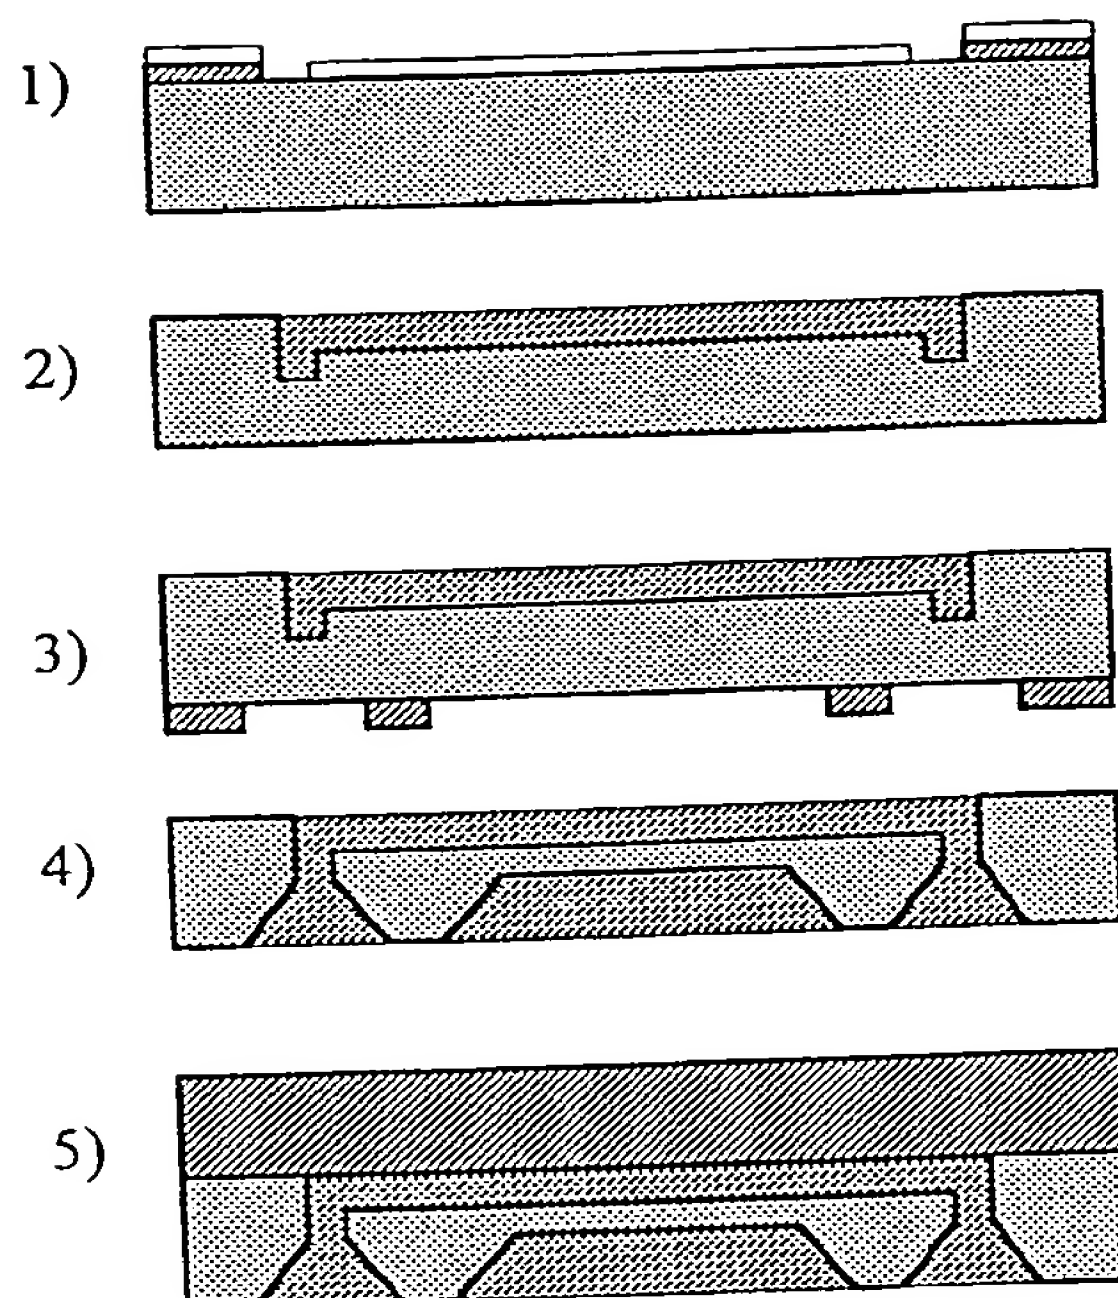


Fig. 16

13/14

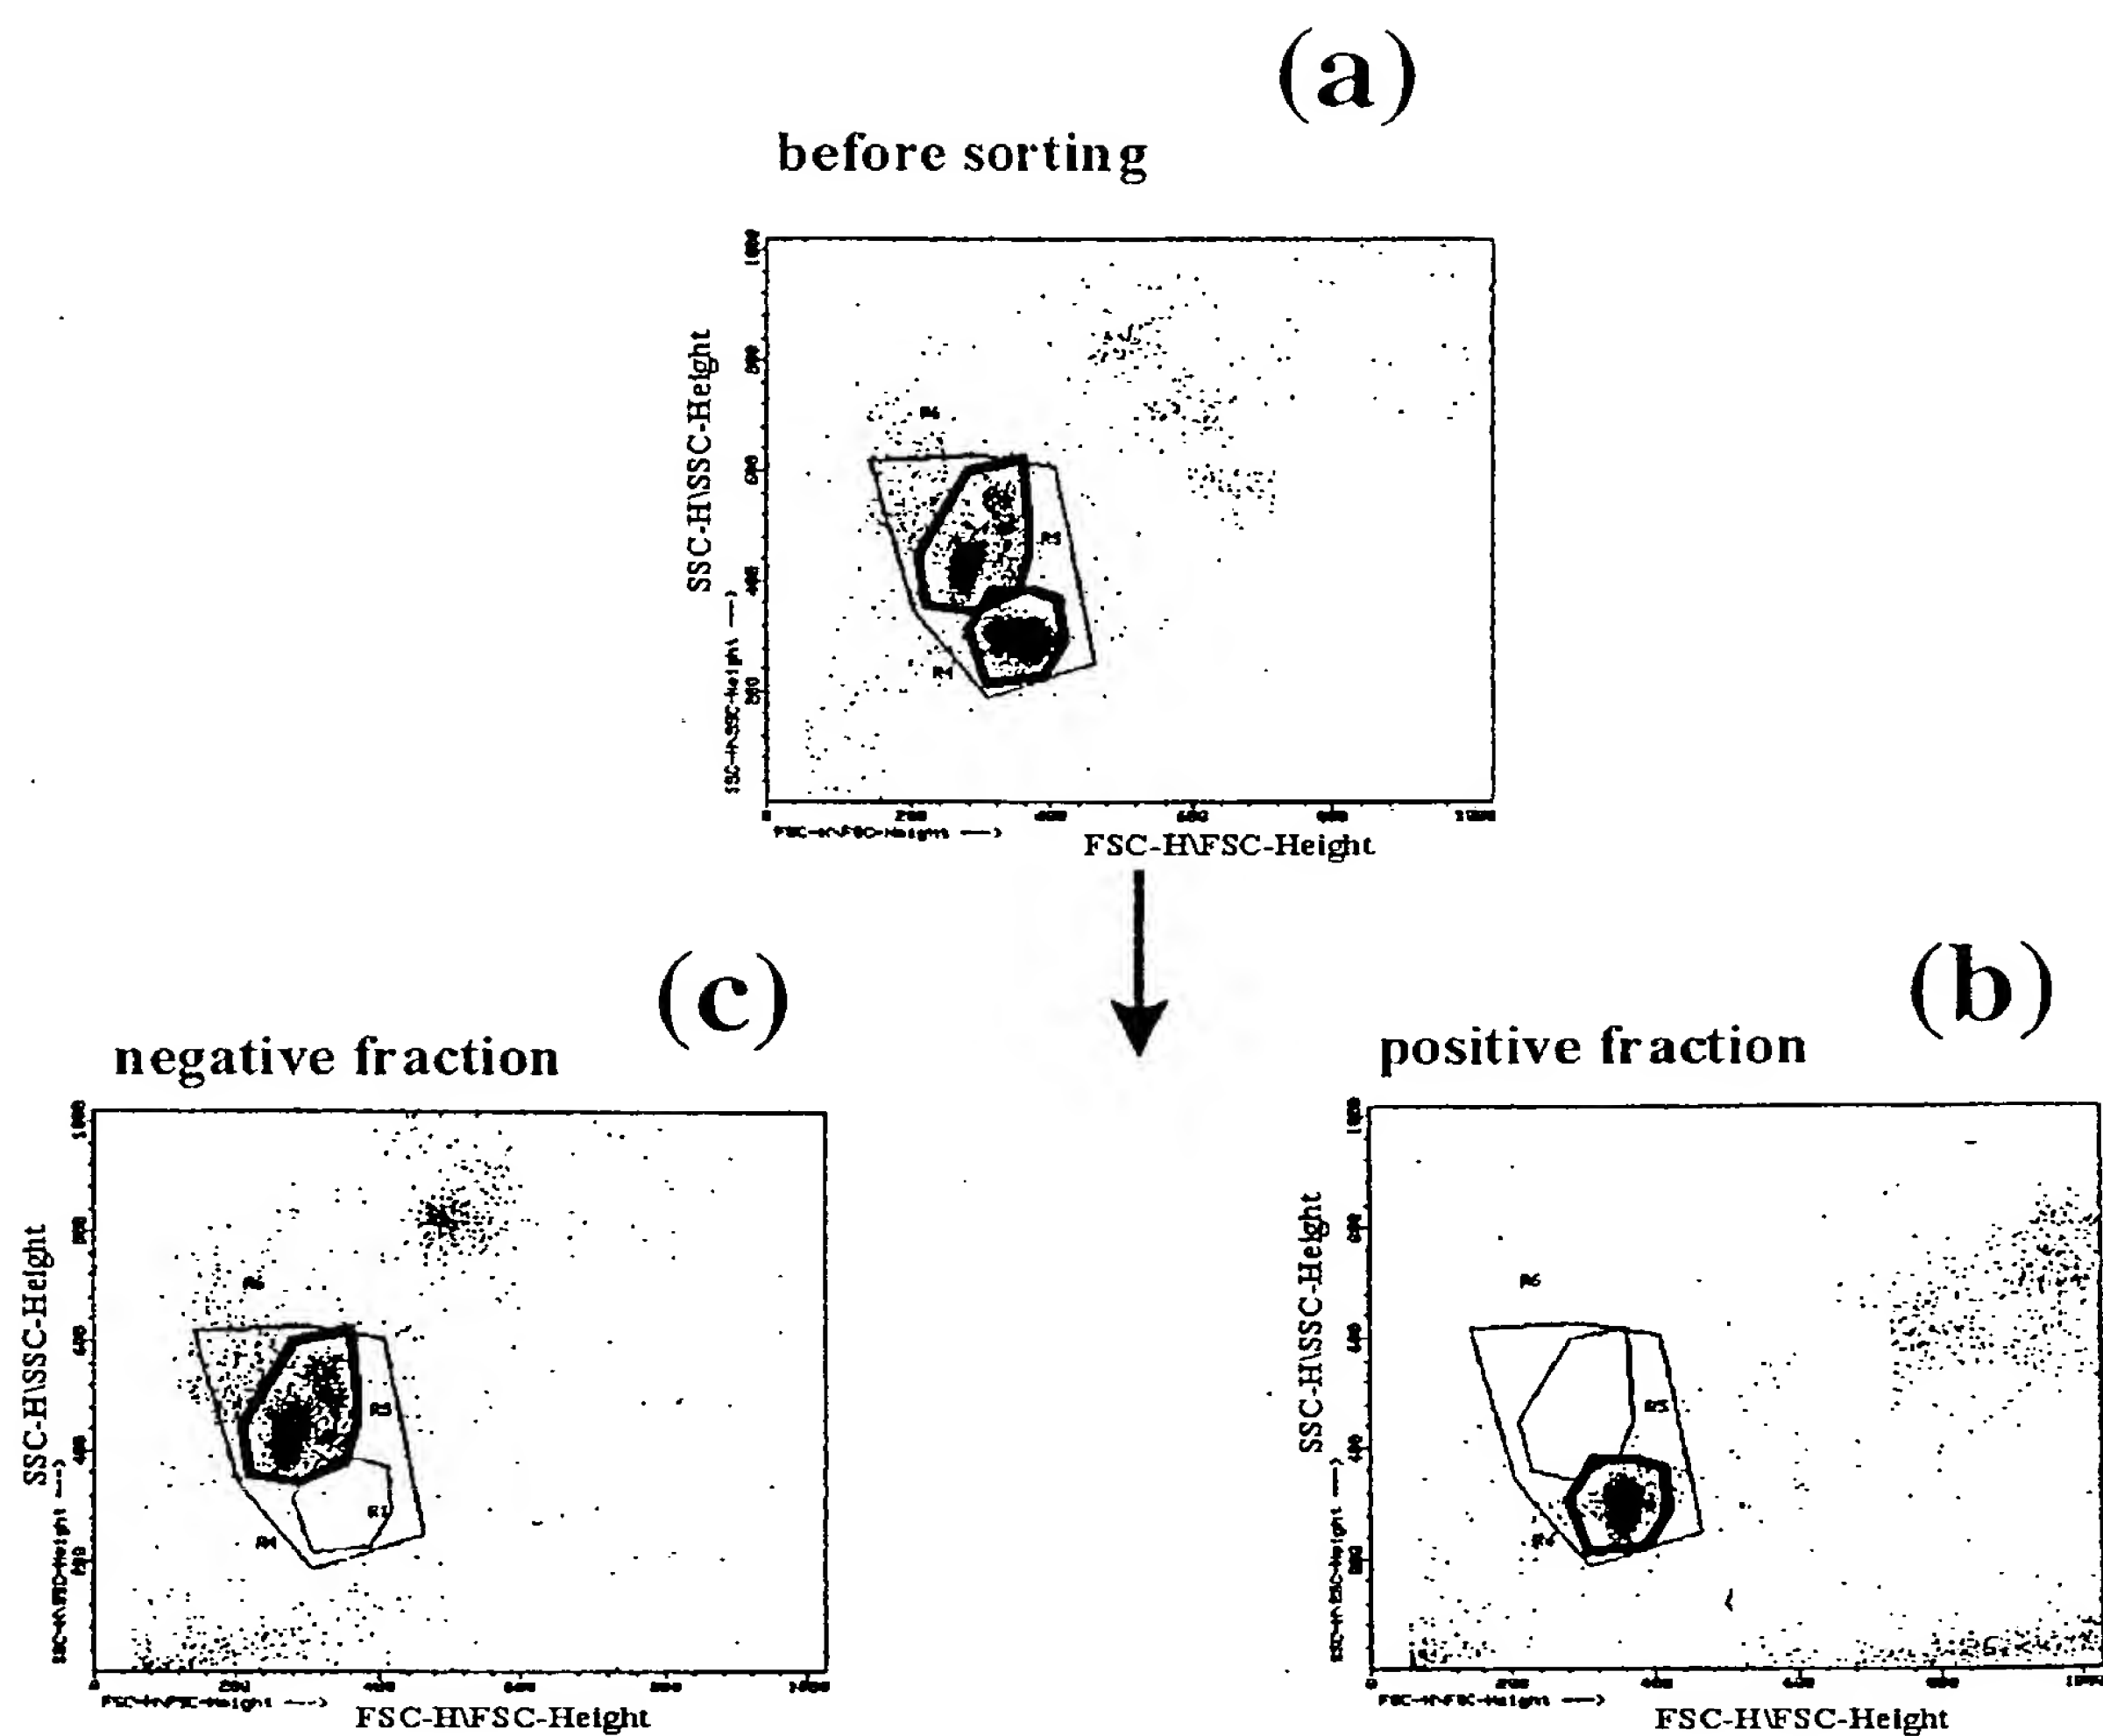


Fig. 17

14/14

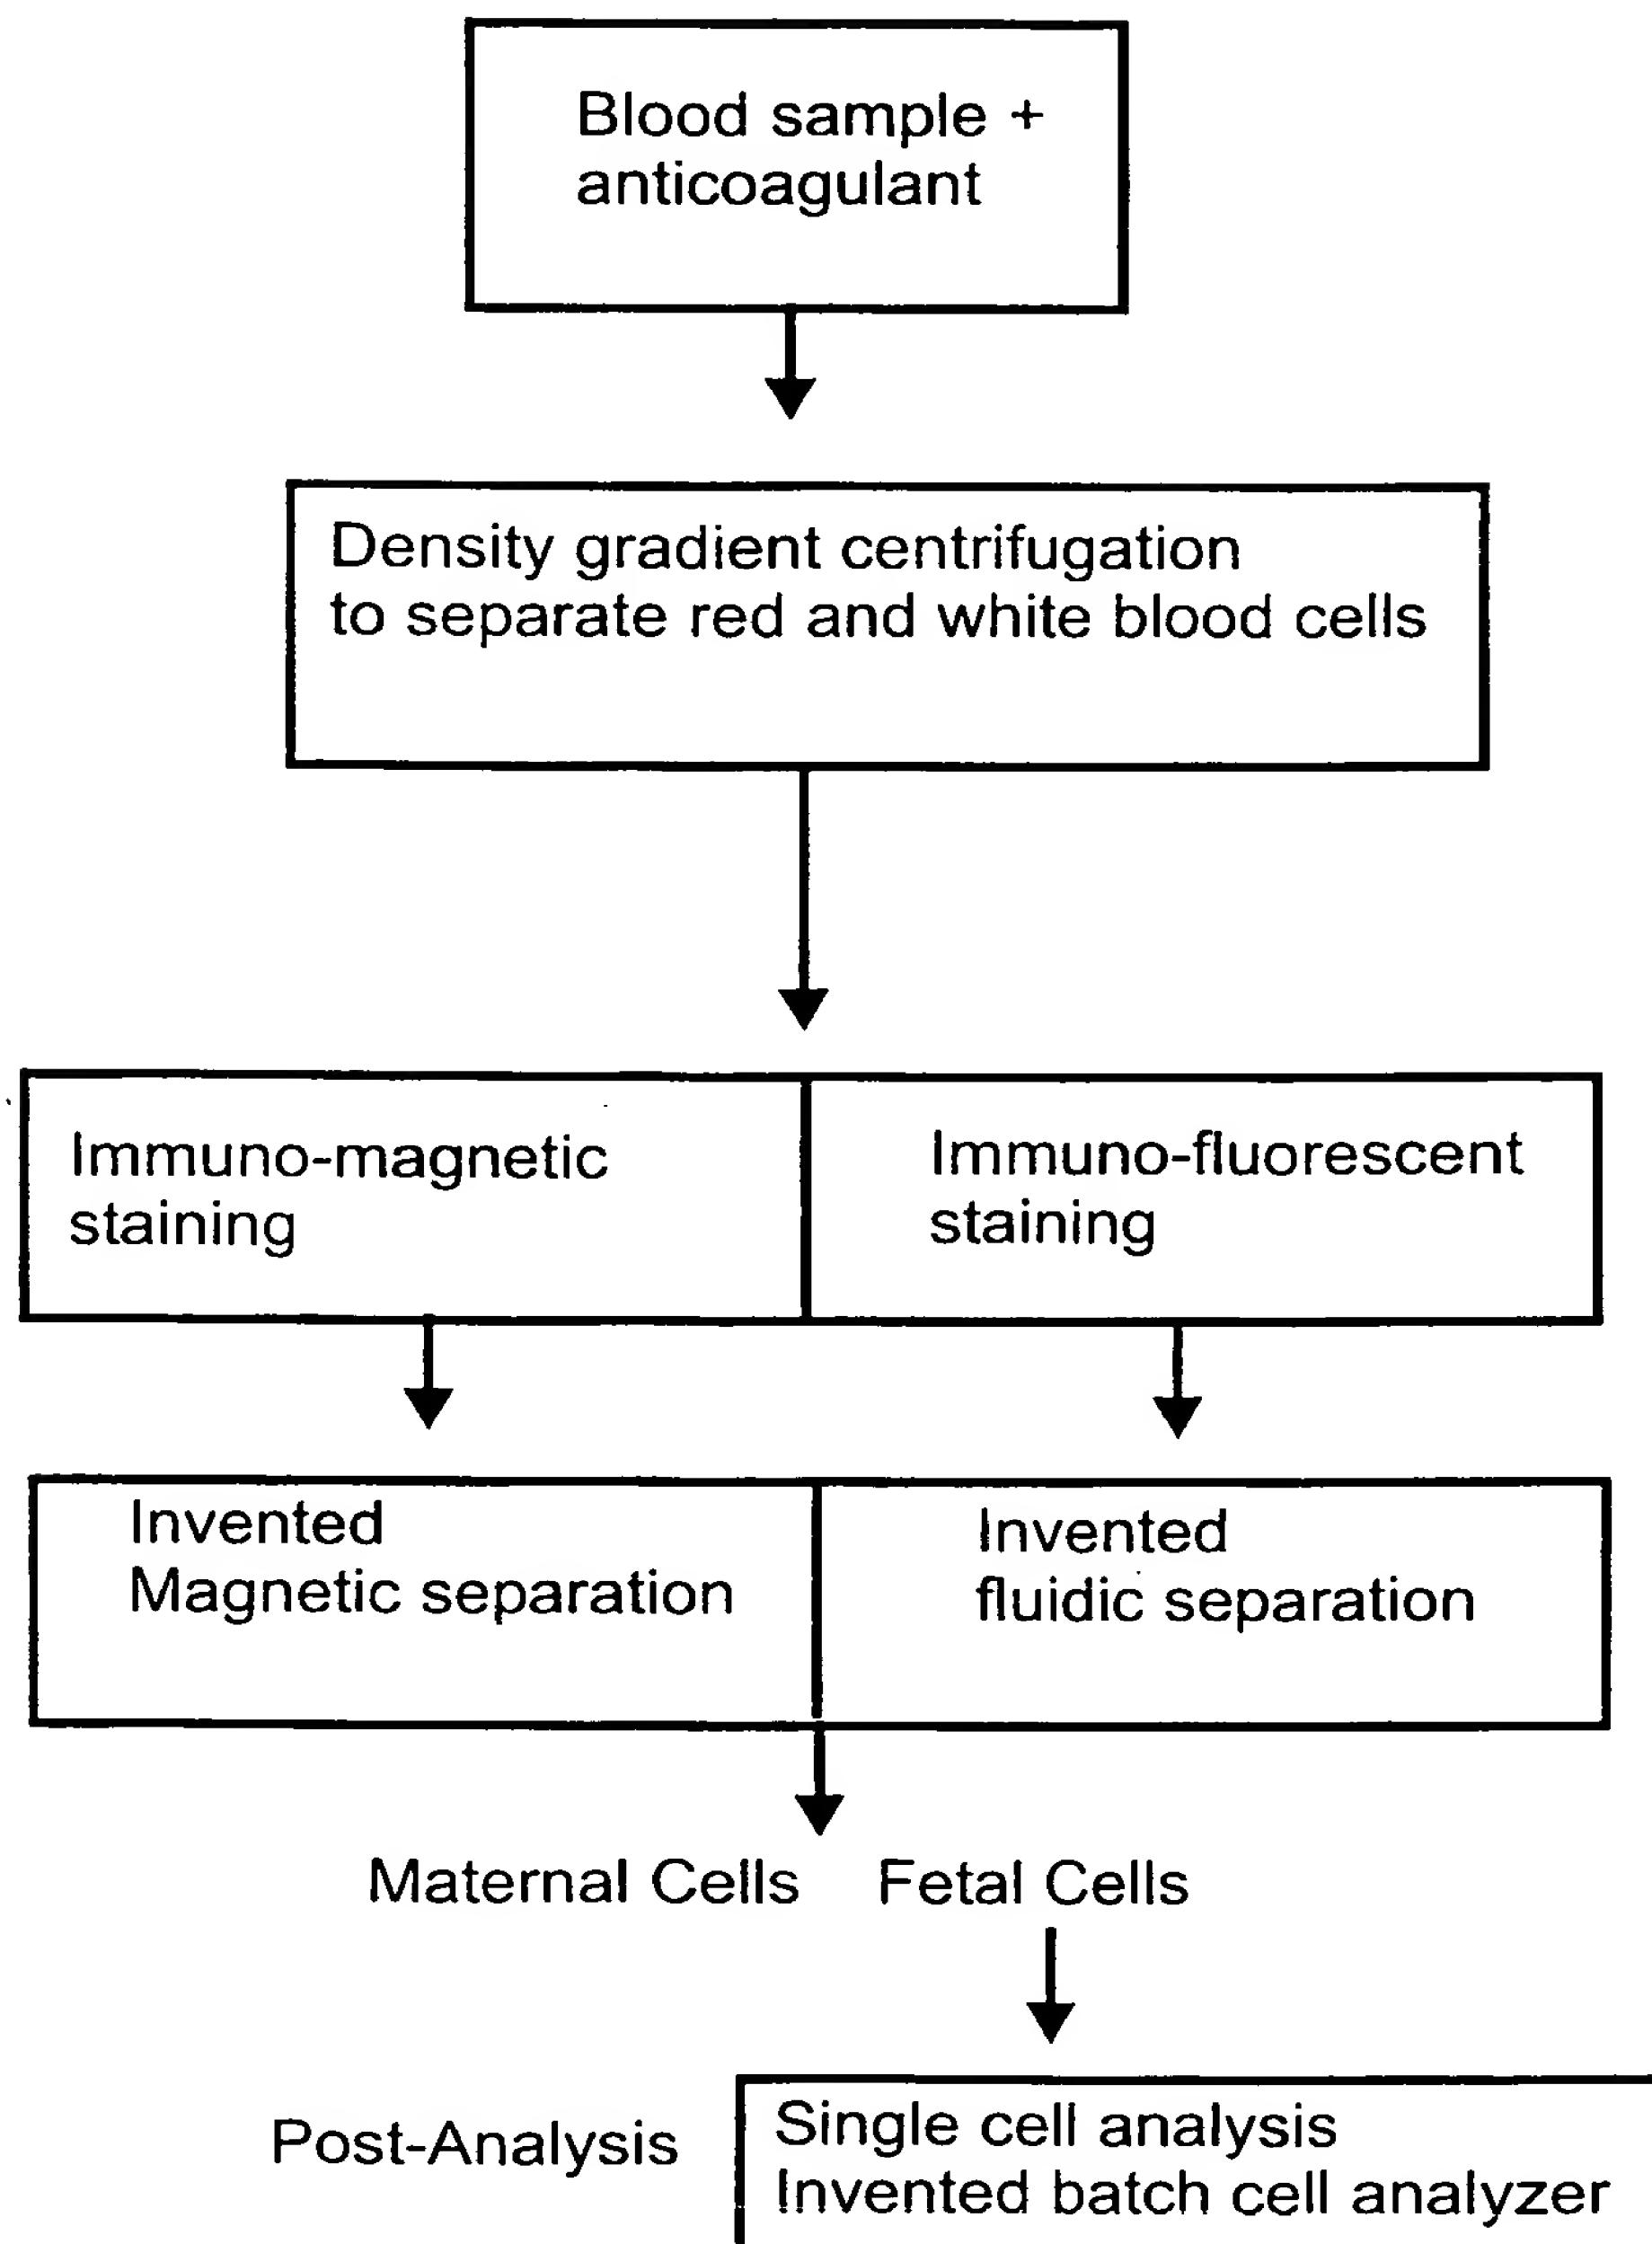


Fig. 18

INTERNATIONAL SEARCH REPORT

Intern. Application No
PCT/DK 97/00368

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01N15/14 G01N33/543 B03C1/035

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G01N B03C B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>AHN C H ET AL: "A FULLY INTEGRATED MICROMACHINED MAGNETIC PARTICLE MANIPULATOR AND SEPARATOR" PROCEEDING OF THE WORKSHOP ON MICRO ELECTRO MECHANICAL SYSTEMS (MEM, OISO, JAN. 25 - 28, 1994, no. WORKSHOP 7, 25 January 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 91-96, XP000528399 see the whole document</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p>	<p>1-4,9, 10,12, 17, 20-27, 29,30, 34,35</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 December 1997

Date of mailing of the international search report

- 7. 01. 98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brison, 0

INTERNATIONAL SEARCH REPORT

Intern: al Application No
PCT/DK 97/00368

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 827 555 A (KAMENSKY L ET AL) 6 August 1974	1-4,9, 10,12, 17, 20-27, 29,30,34
	see the whole document	
X	---	37
Y	US 4 279 345 A (ALLRED JOHN C) 21 July 1981	12
	see the whole document	

Y	WO 96 09409 A (MILTENYI BIOTECH INC) 28 March 1996	35
	see page 5, line 10 - page 8, line 20	

Y	US 4 910 148 A (SORENSEN OTTO ET AL) 20 March 1990	36
	see the whole document	

Y	US 3 560 754 A (KAMENSKY LOUIS A) 2 February 1971	36
	see the whole document	

X	WO 94 15193 A (SIENNA BIOTECH INC) 7 July 1994	38
	see abstract	

X	WO 93 22058 A (UNIV PENNSYLVANIA) 11 November 1993	39
	see page 11, line 1-14	

A	US 5 053 344 A (ZBOROWSKI MACIEJ ET AL) 1 October 1991	1
	see abstract	

A	US 5 483 469 A (VAN DEN ENGH GER ET AL) 9 January 1996	1
	see the whole document	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3827555 A	06-08-74	US 3984307 A	05-10-76
US 4279345 A	21-07-81	NONE	
WO 9609409 A	28-03-96	AU 3593595 A	09-04-96
		CA 2200294 A	28-03-96
		EP 0778899 A	18-06-97
US 4910148 A	20-03-90	NONE	
US 3560754 A	02-02-71	BE 689813 A	02-05-67
		CH 446769 A	
		DE 1598634 A	15-04-71
		FR 1501326 A	29-01-68
		GB 1101063 A	
		NL 6615120 A	18-05-67
		SE 333264 B	08-03-71
WO 9415193 A	07-07-94	AU 670489 B	18-07-96
		AU 5873494 A	19-07-94
		CA 2151060 A	07-07-94
		CN 1092866 A	28-09-94
		EP 0676045 A	11-10-95
		JP 8505231 T	04-06-96
		US 5589401 A	31-12-96
WO 9322058 A	11-11-93	US 5304487 A	19-04-94
		US 5296375 A	22-03-94
		AT 155711 T	15-08-97
		AT 140025 T	15-07-96
		AT 140880 T	15-08-96
		AU 677780 B	08-05-97
		AU 4222393 A	29-11-93
		AU 680195 B	24-07-97
		AU 4222593 A	29-11-93
		AU 677781 B	08-05-97
		AU 4222693 A	29-11-93
		AU 4222793 A	29-11-93
		AU 677197 B	17-04-97
		AU 4223593 A	29-11-93

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No


PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9322058 A		CA 2134474 A	11-11-93
		CA 2134475 A	11-11-93
		CA 2134476 A	11-11-93
		CA 2134478 A	11-11-93
		DE 69303483 D	08-08-96
		DE 69303483 T	06-02-97
		DE 69303898 D	05-09-96
		DE 69303898 T	20-02-97
		DE 69312483 D	04-09-97
		EP 0637996 A	15-02-95
		EP 0637997 A	15-02-95
		EP 0639223 A	22-02-95
		EP 0637998 A	15-02-95
		EP 0637999 A	15-02-95
		HK 16897 A	13-02-97
		JP 7506430 T	13-07-95
		JP 7506431 T	13-07-95
		JP 7506256 T	13-07-95
		JP 7506257 T	13-07-95
		JP 7506258 T	13-07-95
		WO 9322053 A	11-11-93
		WO 9322054 A	11-11-93
		WO 9322421 A	11-11-93
		WO 9322055 A	11-11-93
		US 5635358 A	03-06-97
		US 5427946 A	27-06-95
		US 5498392 A	12-03-96
		US 5587128 A	24-12-96
		US 5486335 A	23-01-96
		US 5637469 A	10-06-97
US 5053344 A	01-10-91	NONE	
US 5483469 A	09-01-96	NONE	

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 15/14, 33/543, B03C 1/035		A1	(11) International Publication Number: WO 98/10267
			(43) International Publication Date: 12 March 1998 (12.03.98)
(21) International Application Number: PCT/DK97/00368			(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 4 September 1997 (04.09.97)			
(30) Priority Data: 0953/96 4 September 1996 (04.09.96) DK 0150/97 10 February 1997 (10.02.97) DK			
(71) Applicant (for all designated States except US): TECHNICAL UNIVERSITY OF DENMARK [DK/DK]; DTU - Building 101 A, DK-2800 Lyngby (DK).			
(72) Inventor; and (75) Inventor/Applicant (for US only): BLANKENSTEIN, Gert [DE/DE]; Wiesinger Weg 5, D-20253 Hamburg (DE).			
(4) Agent: PLOUGMANN, VINGTOFT & PARTNERS A/S; Sankt Annae Plads 11, P.O. Box 3007, DK-1021 Copenhagen K (DK).			Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. VINGTOFT P. H. JENSEN C. H. JENSEN

(54) Title: A MICRO FLOW SYSTEM FOR PARTICLE SEPARATION AND ANALYSIS

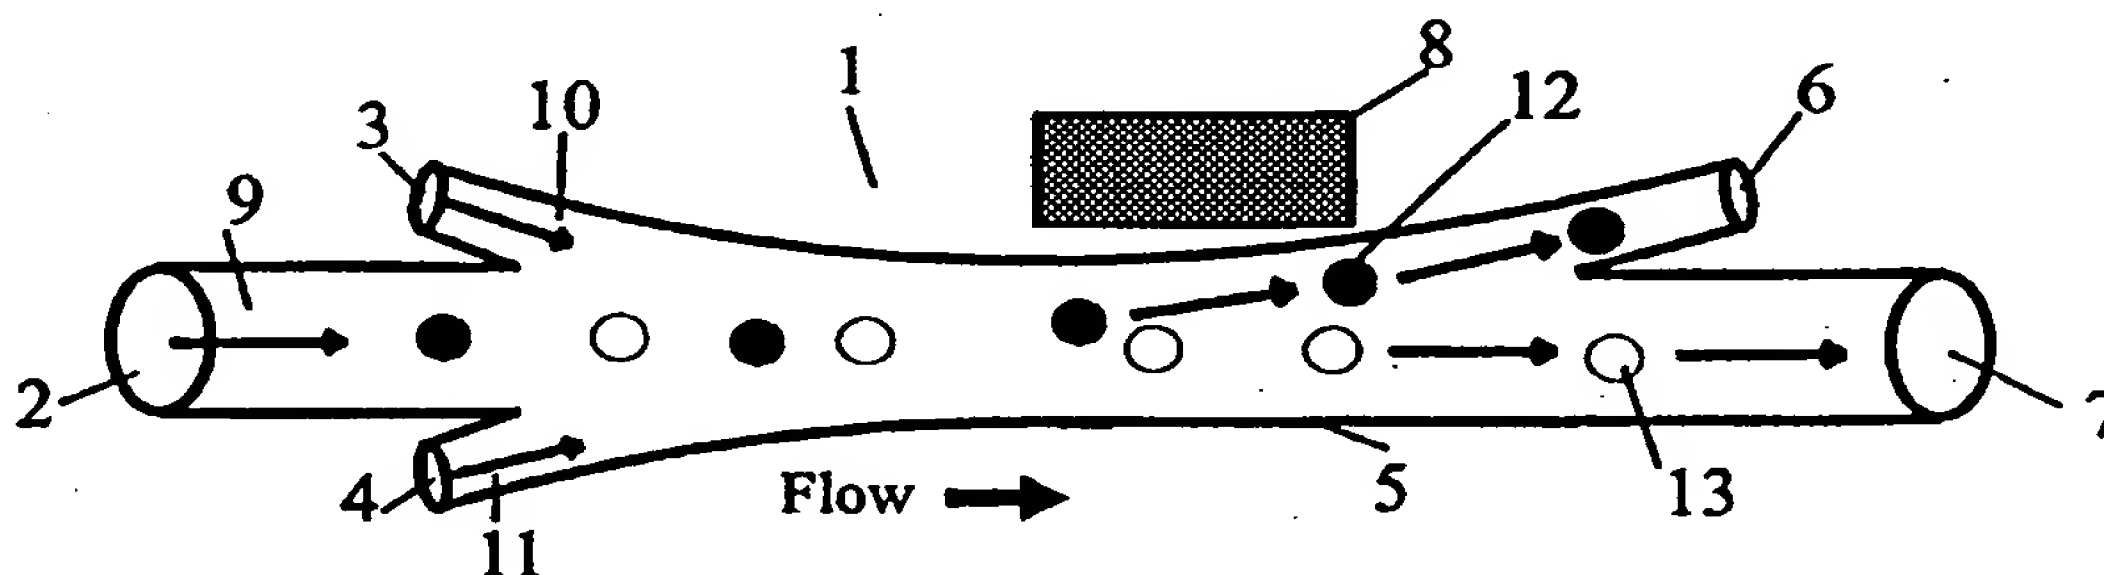

(57) Abstract

A micro flow system is provided for separating particles, comprising a microfabricated member having a flow channel (5) defined therein for guiding a flow of a fluid containing the particles through the flow channel, first inlet means (2) positioned at one end of the flow channel for entering the fluid into the flow channel, first outlet means (7) positioned at the other end of the flow channel for discharging the fluid from the flow channel, the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross section of the flow channel, the member being positioned in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field across the flow channel are deflected in the direction of the field. Further, a micro flow system is provided for analysing components of a fluid comprising a microfabricated member having a flow channel defined therein for guiding a flow of a fluid through the flow channel, first inlet means for entering particles into the flow channel, first outlet means for discharging of fluid from the flow channel and a plurality of assay sites located in the flow channel and comprising immobilised reagents whereby the fluid may be analyzed for a plurality of components while residing in the flow channel.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

Intern. Application No
PCT/DK 97/00368

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01N15/14 G01N33/543 B03C1/035

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G01N B03C B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>AHN C H ET AL: "A FULLY INTEGRATED MICROMACHINED MAGNETIC PARTICLE MANIPULATOR AND SEPARATOR" PROCEEDING OF THE WORKSHOP ON MICRO ELECTRO MECHANICAL SYSTEMS (MEM, OISO, JAN. 25 - 28, 1994, no. WORKSHOP 7, 25 January 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 91-96, XP000528399 see the whole document</p> <p style="text-align: center;">---</p> <p style="text-align: center;">-/--</p>	<p>1-4,9, 10,12, 17, 20-27, 29,30, 34,35</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

12 December 1997

Date of mailing of the international search report

- 7. 01. 98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brison, O

INTERNATIONAL SEARCH REPORT

Intern: al Application No

PCT/DK 97/00368

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 827 555 A (KAMENSKY L ET AL) 6 August 1974 see the whole document	1-4, 9, 10, 12, 17, 20-27, 29, 30, 34
X	---	37
Y	US 4 279 345 A (ALLRED JOHN C) 21 July 1981 see the whole document	12
Y	---	
Y	WO 96 09409 A (MILTENYI BIOTECH INC) 28 March 1996 see page 5, line 10 - page 8, line 20	35
Y	---	
Y	US 4 910 148 A (SORENSEN OTTO ET AL) 20 March 1990 see the whole document	36
Y	---	
Y	US 3 560 754 A (KAMENSKY LOUIS A) 2 February 1971 see the whole document	36
X	---	
X	WO 94 15193 A (SIENNA BIOTECH INC) 7 July 1994 see abstract	38
X	---	
X	WO 93 22058 A (UNIV PENNSYLVANIA) 11 November 1993 see page 11, line 1-14	39
A	---	
A	US 5 053 344 A (ZBOROWSKI MACIEJ ET AL) 1 October 1991 see abstract	1
A	---	
A	US 5 483 469 A (VAN DEN ENGH GER ET AL) 9 January 1996 see the whole document	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3827555 A	06-08-74	US 3984307 A	05-10-76
US 4279345 A	21-07-81	NONE	
WO 9609409 A	28-03-96	AU 3593595 A	09-04-96
		CA 2200294 A	28-03-96
		EP 0778899 A	18-06-97
US 4910148 A	20-03-90	NONE	
US 3560754 A	02-02-71	BE 689813 A	02-05-67
		CH 446769 A	
		DE 1598634 A	15-04-71
		FR 1501326 A	29-01-68
		GB 1101063 A	
		NL 6615120 A	18-05-67
		SE 333264 B	08-03-71
WO 9415193 A	07-07-94	AU 670489 B	18-07-96
		AU 5873494 A	19-07-94
		CA 2151060 A	07-07-94
		CN 1092866 A	28-09-94
		EP 0676045 A	11-10-95
		JP 8505231 T	04-06-96
		US 5589401 A	31-12-96
WO 9322058 A	11-11-93	US 5304487 A	19-04-94
		US 5296375 A	22-03-94
		AT 155711 T	15-08-97
		AT 140025 T	15-07-96
		AT 140880 T	15-08-96
		AU 677780 B	08-05-97
		AU 4222393 A	29-11-93
		AU 680195 B	24-07-97
		AU 4222593 A	29-11-93
		AU 677781 B	08-05-97
		AU 4222693 A	29-11-93
		AU 4222793 A	29-11-93
		AU 677197 B	17-04-97
		AU 4223593 A	29-11-93

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern: Application No

PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9322058 A		CA 2134474 A	11-11-93
		CA 2134475 A	11-11-93
		CA 2134476 A	11-11-93
		CA 2134478 A	11-11-93
		DE 69303483 D	08-08-96
		DE 69303483 T	06-02-97
		DE 69303898 D	05-09-96
		DE 69303898 T	20-02-97
		DE 69312483 D	04-09-97
		EP 0637996 A	15-02-95
		EP 0637997 A	15-02-95
		EP 0639223 A	22-02-95
		EP 0637998 A	15-02-95
		EP 0637999 A	15-02-95
		HK 16897 A	13-02-97
		JP 7506430 T	13-07-95
		JP 7506431 T	13-07-95
		JP 7506256 T	13-07-95
		JP 7506257 T	13-07-95
		JP 7506258 T	13-07-95
		WO 9322053 A	11-11-93
		WO 9322054 A	11-11-93
		WO 9322421 A	11-11-93
		WO 9322055 A	11-11-93
		US 5635358 A	03-06-97
		US 5427946 A	27-06-95
		US 5498392 A	12-03-96
		US 5587128 A	24-12-96
		US 5486335 A	23-01-96
		US 5637469 A	10-06-97

US 5053344 A	01-10-91	NONE	

US 5483469 A	09-01-96	NONE	

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

United States Patent and Trademark
Office
(Box PCT)
Crystal Plaza 2
Washington, DC 20231
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year)

31 March 1998 (31.03.98)

International application No.

PCT/DK97/00368

Applicant's or agent's file reference

18791 PC1

International filing date (day/month/year)

04 September 1997 (04.09.97)

Priority date (day/month/year)

04 September 1996 (04.09.96)

Applicant

BLANKENSTEIN, Gert

1. The designated Office is hereby notified of its election made:



in the demand filed with the International Preliminary Examining Authority on:

09 March 1998 (09.03.98)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Athina Nickitas-Etienne

Telephone No.: (41-22) 338.83.38

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference 18791 PC1	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/DK 97/ 00368	International filing date (day/month/year) 04/09/1997	(Earliest) Priority Date (day/month/year) 04/09/1996
Applicant TECHNICAL UNIVERSITY OF DENMARK et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 4 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. ☐ Certain claims were found unsearchable (see Box I).

2. ☐ Unity of invention is lacking (see Box II).

3. ☐ The international application contains disclosure of a **nucleotide and/or amino acid sequence listing** and the international search was carried out on the basis of the sequence listing

☐ filed with the international application.

☐ furnished by the applicant separately from the international application,

☐ but not accompanied by a statement to the effect that it did not include matter going beyond the disclosure in the international application as filed.

☐ Transcribed by this Authority

4. With regard to the title, ☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this International Search Report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is:

Figure No. 1 ☒ as suggested by the applicant.

☐ None of the figures.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

INTERNATIONAL SEARCH REPORT

National Application No

T/DK 97/00368

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G01N15/14 G01N33/543 B03C1/035

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01N B03C B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	AHN C H ET AL: "A FULLY INTEGRATED MICROMACHINED MAGNETIC PARTICLE MANIPULATOR AND SEPARATOR" PROCEEDING OF THE WORKSHOP ON MICRO ELECTRO MECHANICAL SYSTEMS (MEM, OISO, JAN. 25 - 28, 1994, no. WORKSHOP 7, 25 January 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 91-96, XP000528399 see the whole document --- -/--	1-4,9, 10,12, 17, 20-27, 29,30, 34,35



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

12 December 1997

Date of mailing of the international search report

- 7. 01. 98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Brison, O

INTERNATIONAL SEARCHREPORT

International Application No

PCT/DK 97/00368

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 827 555 A (KAMENTSKY L ET AL) 6 August 1974 see the whole document	1-4,9, 10,12, 17, 20-27, 29,30,34
X	---	37
Y	US 4 279 345 A (ALLRED JOHN C) 21 July 1981 see the whole document	12
Y	---	
Y	WO 96 09409 A (MILTENYI BIOTECH INC) 28 March 1996 see page 5, line 10 - page 8, line 20	35
Y	---	
Y	US 4 910 148 A (SORENSEN OTTO ET AL) 20 March 1990 see the whole document	36
Y	---	
Y	US 3 560 754 A (KAMENTSKY LOUIS A) 2 February 1971 see the whole document	36
X	---	
X	WO 94 15193 A (SIENNA BIOTECH INC) 7 July 1994 see abstract	38
X	---	
X	WO 93 22058 A (UNIV PENNSYLVANIA) 11 November 1993 see page 11, line 1-14	39
A	---	
A	US 5 053 344 A (ZBOROWSKI MACIEJ ET AL) 1 October 1991 see abstract	1
A	---	
A	US 5 483 469 A (VAN DEN ENGH GER ET AL) 9 January 1996 see the whole document	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3827555 A	06-08-74	US 3984307 A	05-10-76
US 4279345 A	21-07-81	NONE	
WO 9609409 A	28-03-96	AU 3593595 A	09-04-96
		CA 2200294 A	28-03-96
		EP 0778899 A	18-06-97
US 4910148 A	20-03-90	NONE	
US 3560754 A	02-02-71	BE 689813 A	02-05-67
		CH 446769 A	
		DE 1598634 A	15-04-71
		FR 1501326 A	29-01-68
		GB 1101063 A	
		NL 6615120 A	18-05-67
		SE 333264 B	08-03-71
WO 9415193 A	07-07-94	AU 670489 B	18-07-96
		AU 5873494 A	19-07-94
		CA 2151060 A	07-07-94
		CN 1092866 A	28-09-94
		EP 0676045 A	11-10-95
		JP 8505231 T	04-06-96
		US 5589401 A	31-12-96
WO 9322058 A	11-11-93	US 5304487 A	19-04-94
		US 5296375 A	22-03-94
		AT 155711 T	15-08-97
		AT 140025 T	15-07-96
		AT 140880 T	15-08-96
		AU 677780 B	08-05-97
		AU 4222393 A	29-11-93
		AU 680195 B	24-07-97
		AU 4222593 A	29-11-93
		AU 677781 B	08-05-97
		AU 4222693 A	29-11-93
		AU 4222793 A	29-11-93
		AU 677197 B	17-04-97
		AU 4223593 A	29-11-93

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/DK 97/00368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9322058 A		CA 2134474 A	11-11-93
		CA 2134475 A	11-11-93
		CA 2134476 A	11-11-93
		CA 2134478 A	11-11-93
		DE 69303483 D	08-08-96
		DE 69303483 T	06-02-97
		DE 69303898 D	05-09-96
		DE 69303898 T	20-02-97
		DE 69312483 D	04-09-97
		EP 0637996 A	15-02-95
		EP 0637997 A	15-02-95
		EP 0639223 A	22-02-95
		EP 0637998 A	15-02-95
		EP 0637999 A	15-02-95
		HK 16897 A	13-02-97
		JP 7506430 T	13-07-95
		JP 7506431 T	13-07-95
		JP 7506256 T	13-07-95
		JP 7506257 T	13-07-95
		JP 7506258 T	13-07-95
		WO 9322053 A	11-11-93
		WO 9322054 A	11-11-93
		WO 9322421 A	11-11-93
		WO 9322055 A	11-11-93
		US 5635358 A	03-06-97
		US 5427946 A	27-06-95
		US 5498392 A	12-03-96
		US 5587128 A	24-12-96
		US 5486335 A	23-01-96
		US 5637469 A	10-06-97
-----	-----	-----	-----
US 5053344 A	01-10-91	NONE	
-----	-----	-----	-----
US 5483469 A	09-01-96	NONE	
-----	-----	-----	-----

Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

A micro flow system is provided for separating particles, comprising a microfabricated member having a flow channel (5) defined therein for guiding a flow of a fluid containing the particles through the flow channel, first inlet means (2) positioned at one end of the flow channel for entering the fluid into the flow channel, first outlet means (7) positioned at the other end of the flow channel for discharging the fluid from the flow channel, the flow of the fluid containing the particles being controlled in such a way that one particle at the time passes a cross-section of the flow channel, the member being positioned in a field that is substantially perpendicular to a longitudinal axis of the flow channel so that particles residing in the flow channel and being susceptible to the field across the flow channel are deflected in the direction of the field.

Further, a micro flow system is provided for analysing components of a fluid comprising a microfabricated member having a flow channel defined therein for guiding a flow of a fluid through the flow channel, first inlet means for entering particles into the flow channel, first outlet means for discharging of fluid from the flow channel and a plurality of assay sites located in the flow channel and comprising immobilised reagents whereby the fluid may be analyzed for a plurality of components while residing in the flow channel.